


Hangzhou GT Rail Traffic Equipment Co., Ltd

IVH Drive: Global Power Transmission Solutions

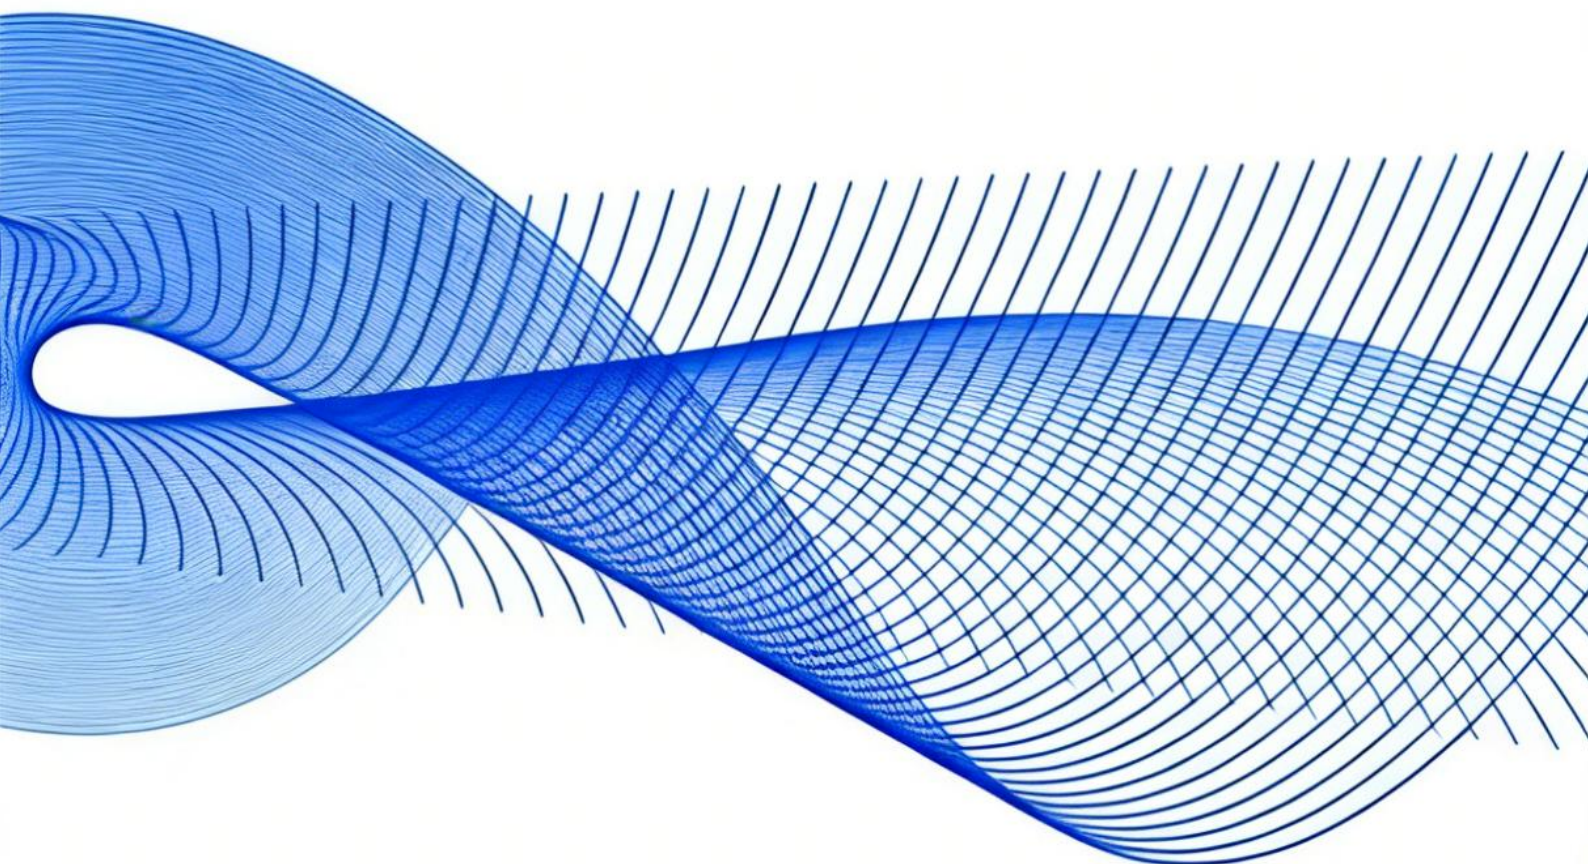

Industrial Fan Catalogue

About Us

IVH DRIVE was founded in 2011 and headquartered in Hangzhou, is a National High-Tech Enterprise integrating R&D, manufacturing, and sales. With over 150 employees (15% in R&D) and a 32,000 m² smart production base, the company achieves an annual turnover of 150 million RMB (with 30% from exports), maintaining steady growth. Holding prestigious international certifications such as CE, UL, and CSA, IVH DRIVE is committed to providing domestic alternatives for high-end transmission equipment, delivering high-efficiency and high-stability power solutions for the global rail traffic and industrial sectors. Our products are widely utilized in diverse industries, including smart logistics, food packaging, energy & mining, and construction machinery. To date, we have exported to 25 countries, with a business footprint spanning Europe, North America, Southeast Asia, and the Middle East, making us your trusted partner for industrial power.

2011

SINCE

25+

EXPORT COUNTRIES

40+

PRODUCT COVERAGE

8

FACTORIES DISTRIBUTION



Product Content


1.DF low-noise blower.....	1
2.YN5-47 boiler induced draft fan.....	7
3.YNGL boiler induced draft fan.....	13
4.CF-11 low-noise fan.....	17
5.11-62 low-noise fan.....	21
6.4-72 centrifugal fan.....	25
7.9-19 High pressure fan.....	31
8.9-26 High pressure fan.....	36
9.5-27/5-32 aluminum fan.....	41
10.YN-TB transparent fan.....	46
11.YN-CX medium pressure fan.....	52
12.YNFL air shower fan.....	53
13.YNHY welding smoke suction fan.....	56
14.Medium pressure fan (iron shell).....	60
15.Medium pressure fan (aluminum shell).....	64


DF多翼式低噪音鼓风机

用途广泛

风量大

噪音低

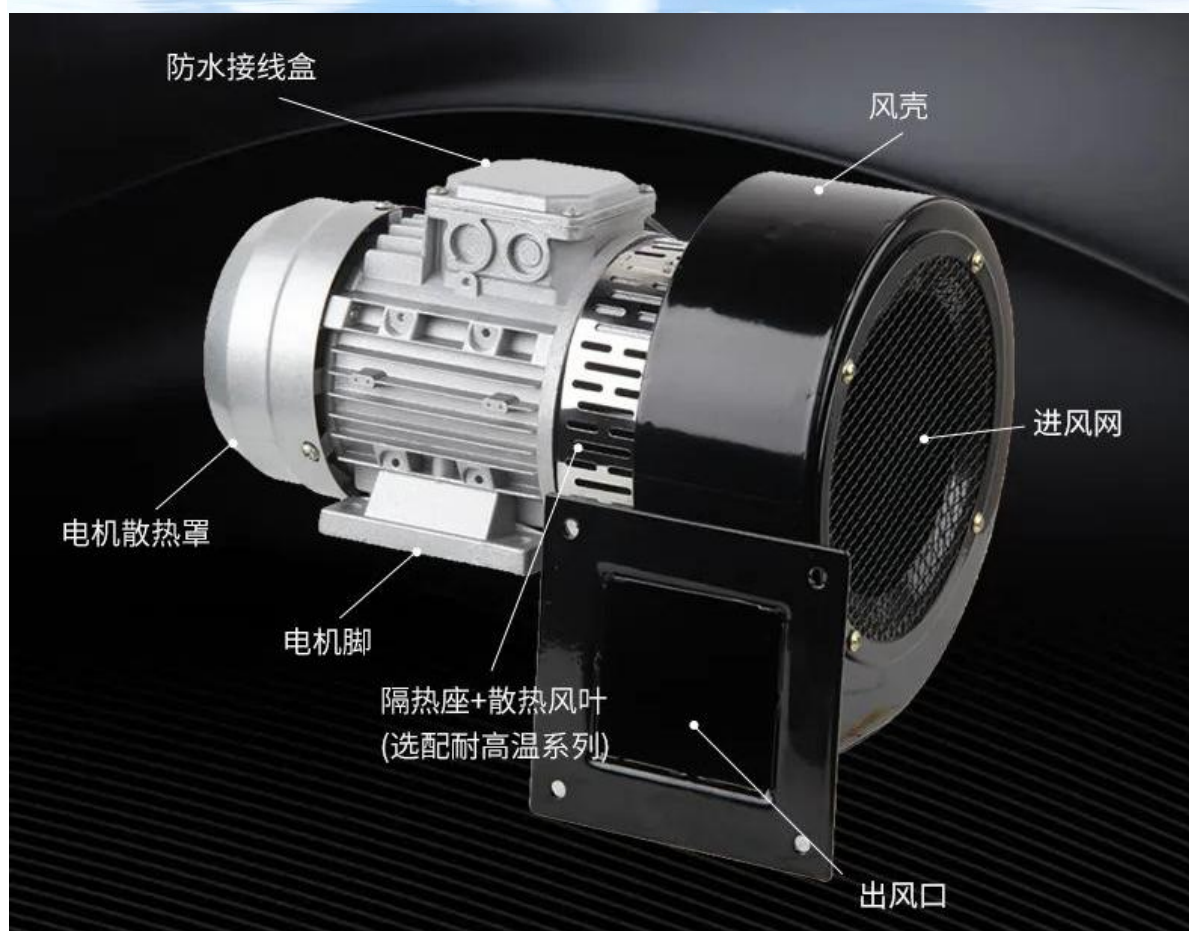

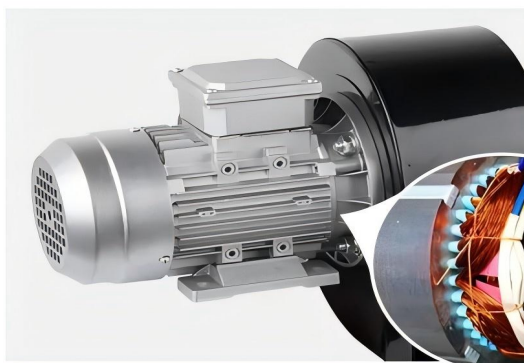

1 配用Y2铝壳电机


铝合金压铸电机，散热快、耐腐蚀。节能、效率、寿命长。

100%铜线
优良矽钢片

2 风冷耐高温设计

(如选配)

专利产品，首创铝连接座
(内设散热风叶)，阻断温度传递，
延长电机高温下使用寿命！

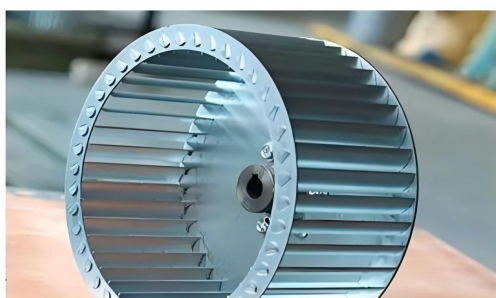

3 多翼式叶轮

镀锌叶片，防腐蚀生锈。
动平衡校正，运行平稳。
风量大、噪音低、节能高效。

4 碳钢外壳

风壳采用冷轧碳钢材质，
钢板加厚，强度好，美观大方。
后经喷塑处理，耐腐蚀防生锈，
耐高温，抗震防摔。



5 产品包装

全系列采用泡沫纸箱（木箱）包装。
保证运输不损坏。



DF（耐高温）

多翼式低噪音离心鼓风机

Multi-wing low noise centrifugal blower

产品简介 Product Brief

- 在DF风机基础上，采用高温材料，隔热连接座（内设散热风叶），对电机进行降温，确保电机高温下正常运转。

- 允许气体最高温度:180℃-200℃

- On the basis of DF fan, adopt high temperature materials, heat insulation connection base (with heat dissipation blades inside), cool down the motor to ensure normal operation under high temperature.

- Normal operating temperature of fan: 180 °C - 200 °C



出厂形式：左旋0度(如图)

主要参数 Main parameter

型号 Model	功率 Power kw	电压 Voltage V	频率 Frequency Hz	转速 Speed r/min	流量 Flow m³/h	全压 Total Head Pa	噪音 Noise dB(A)
DF-1.3-I	120W	220/380	50	2800	305	412	72
DF-1.3-II	180W	220/380	50	2800	405	450	75
DF-1.6-I	250W	220/380	50	2800	504	860	75
DF-1.6-II	370W	220/380	50	2800	660	850	76
DF-2-I	550W	220/380	50	2800	860	1020	76
DF-2-II	750W	220/380	50	2800	1200	1210	80
DF-2-III	1.1KW	220/380	50	2800	1900-2700	1380-1240	82
DF-2.5-I	1.5KW	220/380	50	2800	2600-3500	1360-1220	83
DF-2.5-II	2.2KW	220/380	50	2800	3300-4000	1470-1300	84
DF-2.5-III	3KW	220/380	50	2800	3900-4600	2050-1860	87
DF-2.8-I	4KW	380	50	2800	4500-5400	2120-1830	90
DF-2.8-II	5.5KW	380	50	2800	5000-6000	2360-2010	95
* DF-8	1.1KW	220/380	50	2800	2100-2700	1050-1200	82
* DF-8B	1.5KW	220/380	50	2800	2800-3800	1240-1400	83
* DF-9	2.2KW	220/380	50	2800	3000-4200	1450-1650	84

注：*标的型号为定制无锡款。

DF风机(选配进风法兰)

DF Fan (optional air inlet flange)



- 在DF风机基础上，可选配进风法兰，便于用户安装使用。

- On the basis of DF fan, the air intake straight port, air intake flange and fan bracket can be selected, user-friendly installation and use.

DF风机(选配进风直口)

DF fan (Optional air inlet straight port)




- 在DF风机基础上，可选配进风直口，便于用户安装使用。

- On the basis of DF fan, the air inlet straight port is optional, which is convenient for users to install and use.

DF风机(加长轴电机)

DF Fan (Extended Shaft Motor)



- 在耐高温电机基础上，加长电机轴长度，从而提高耐热程度。

- 广泛适用于烘箱、烤箱、锅炉、热风炉等机械设备。

- 允许气体最高温度:160℃-180℃

- On the basis of high temperature resistant motor, the length of motor shaft is lengthened to improve the heat resistance.

- Widely used in ovens, ovens, boilers, hot stoves and other mechanical equipment.

- Normal operating temperature of fan: 160 °C - 180 °C

DF风机(选配脚架)

DF fan (Selection of scaffold)



- 在DF风机基础上，可选配脚架，便于用户安装使用。

- On the basis of DF fan, foot stand is optional, which is convenient for users to install and use.

DF风机(选配进/出风接口)

DF fan (optional air inlet / outlet interface)



- 在DF风机基础上，可选配进/出风接口，便于用户安装使用。

- On the basis of DF fan, air inlet / outlet interface is optional, which is convenient for users to install and use.

DF风机(选配调节风门)


DF fan (optional damper)



- 在DF风机基础上，可选配调节风门，便于用户调节风量大小。

- On the basis of DF fan, adjustable damper can be selected to facilitate the user to adjust the air volume.





安装尺寸 Installation dimension

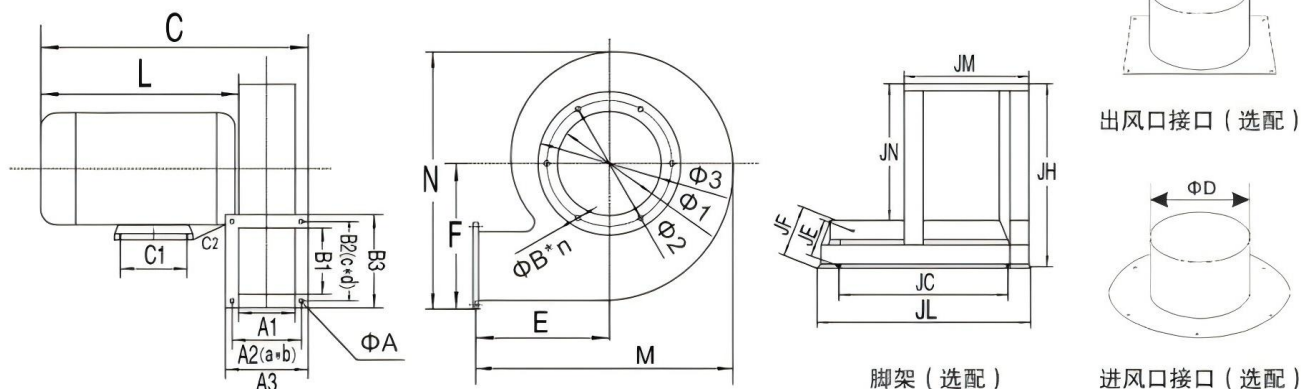



型号 Model	功率 Power	出风口法兰尺寸 Outlet flange size								进风口法兰尺寸(选配) Inlet flange size (optional)				接口(选配) Interface (optional)	
		A1	A2	A3	Φa*b	B1	B2	B3	Φc*d	ΦA	Φ1	Φ2	Φ3	ΦB*n	ΦC出口 ΦD进口
DF-1.3-I	120W	69	95	117	1*95	66	95	117	1*95	6	125	148	158	Φ7*4	100 100
DF-1.3-II	180W	83	111	133	1*111	66	95	117	1*95	6	125	148	158	Φ7*4	100 100
DF-1.6-I	250W	81	95	120	1*95	59	95	118	1*95	6	150	174	186	Φ7*6	100 150
DF-1.6-II	370W	106	132	154	1*132	59	92	114	1*92	6	150	174	186	Φ7*6	100 150
DF-2-I	550W	79	100	122	1*100	73	100	122	1*100	6	112	178	200	Φ8.5*6	100 160
DF-2-II	750W	105	126	148	1*126	73	106	125	1*106	6	112	178	200	Φ8.5*6	100 160
DF-2-III	1.1KW	130	156	181	2*77.5	155	180	205	2*90	8.5	140	205	230	Φ8.5*6	150 160
DF-2.5-I	1.5KW	130	164	190	1*164	170	192	225	2*97	9	140	205	230	Φ8.5*6	150 160
DF-2.5-II	2.2KW	130	164	190	1*164	170	192	225	2*97	9	140	205	230	Φ8.5*6	150 160
DF-2.5-III	3KW	175	200	240	2*100	205	246	272	3*82	10	183	268	290	Φ8.5*6	200 200
DF-2.8-I	4KW	155	190	220	2*95	250	290	320	2*145	11	280	315	332	Φ8.5*6	200 200
DF-2.8-II	5.5KW	175	220	260	2*110	250	294	334	2*147	11	280	315	332	Φ8.5*6	200 200
*DF-8	1.1KW	114	150	180	1*150	177	230	256	2*115	11	140	205	230	Φ8.5*6	150 160
*DF-8B	1.5KW	114	150	180	1*150	177	230	256	2*115	11	140	205	230	Φ8.5*6	150 160
*DF-9	2.2KW	138	185	212	1*185	200	245	270	2*122.5	11	140	205	230	Φ8.5*6	150 160

型号 Model	功率 Power	外形尺寸 Shape size								脚架尺寸(选配) Scaffold size (optional)						
		C1	C2	M	N	C	L	E	F	JM	JN	JH	JL	JC	JF	JE
DF-1.3-I	120W	70	90	190	215	270	155	100	123	130	140	170	240	160	208	153
DF-1.3-II	180W	70	90	191	214	288	155	100	123	130	140	170	240	160	208	153
DF-1.6-I	250W	80	100	235	276	280	182	110	158	130	140	170	240	160	208	153
DF-1.6-II	370W	80	100	235	275	305	182	110	158	130	140	170	240	160	208	153
DF-2-I	550W	90	112	304	330	345	218	145	190	150	180	210	240	154	230	175
DF-2-II	750W	90	112	300	332	345	218	145	190	150	180	210	240	154	230	175
DF-2-III	1.1KW	100	125	335	387	400	245	155	230	150	184	213	240	166	228	204
DF-2.5-I	1.5KW	100	140	365	425	430	290	170	270	190	215	241	280	193	248	195
DF-2.5-II	2.2KW	125	140	365	425	430	290	170	270	190	215	241	280	193	253	195
DF-2.5-III	3KW	140	160	396	475	510	330	175	251	190	215	241	280	193	253	195
DF-2.8-I	4KW	140	190	485	550	540	381	228	335	245	220	260	400	280	310	266
DF-2.8-II	5KW	140	216	485	550	540	441	228	335	245	220	260	400	280	310	266
*DF-8	1.1KW	100	140	364	427	415	270	167	128	150	184	213	240	163	228	204
*DF-8B	1.5KW	100	140	364	427	415	270	167	128	190	223	254	280	191	248	225
*DF-9	2.2KW	125	140	401	469	462	290	183	145	190	223	254	280	191	248	225

注：*标的型号为定制无锡款。

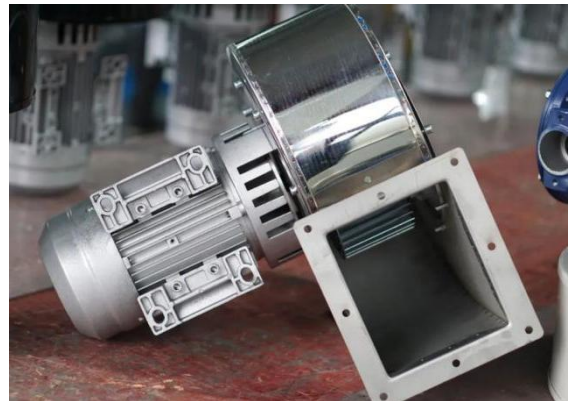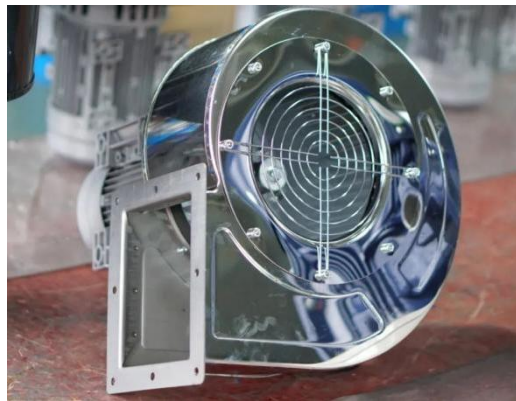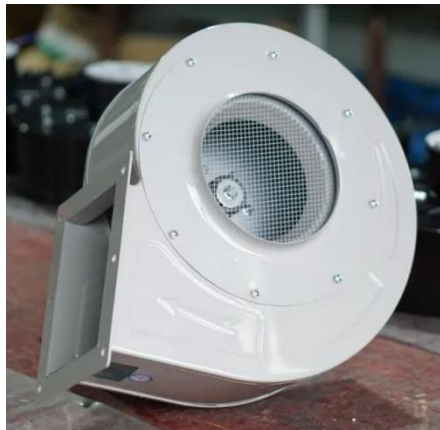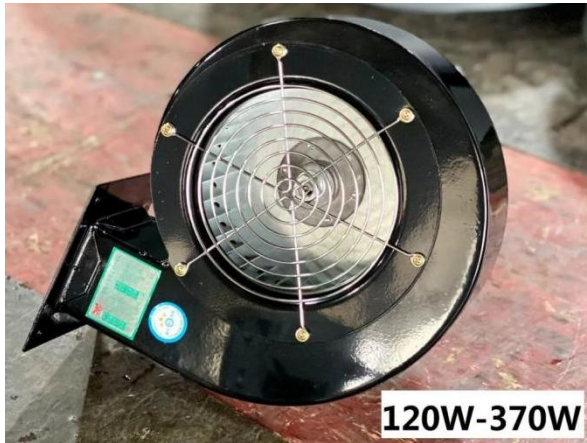

耐高温锅炉引风机

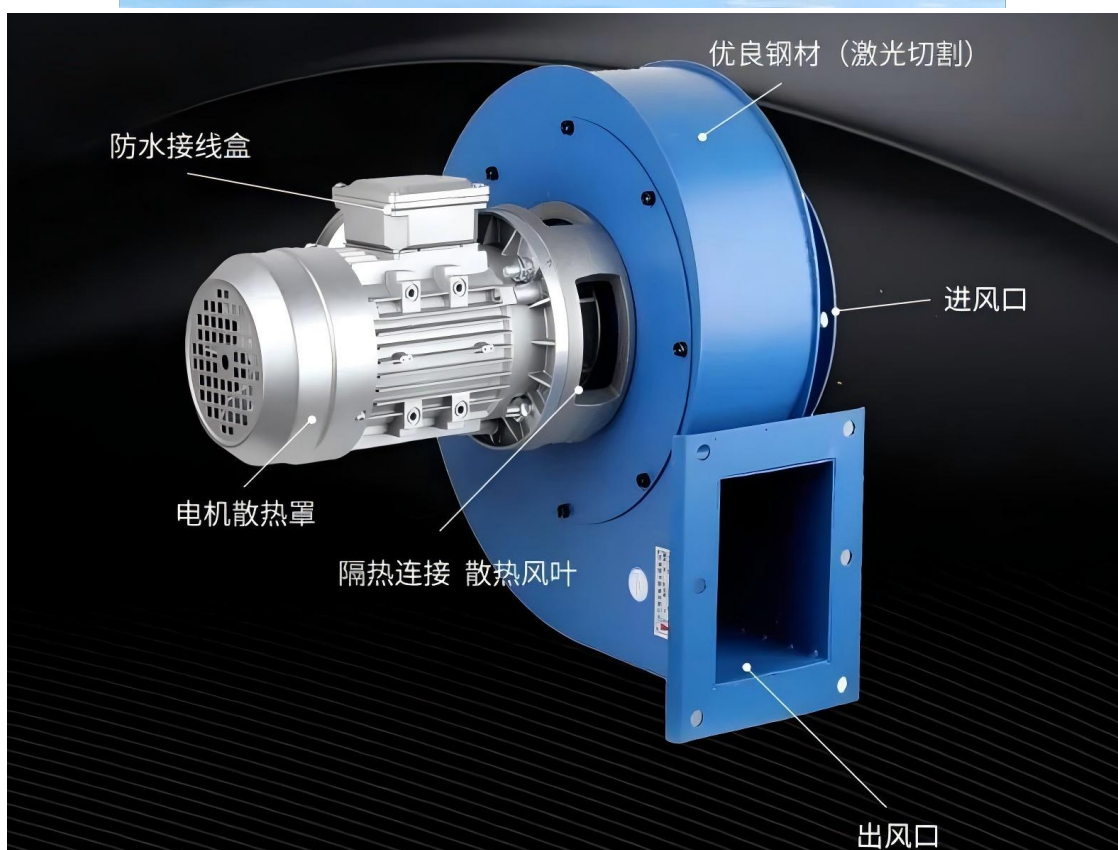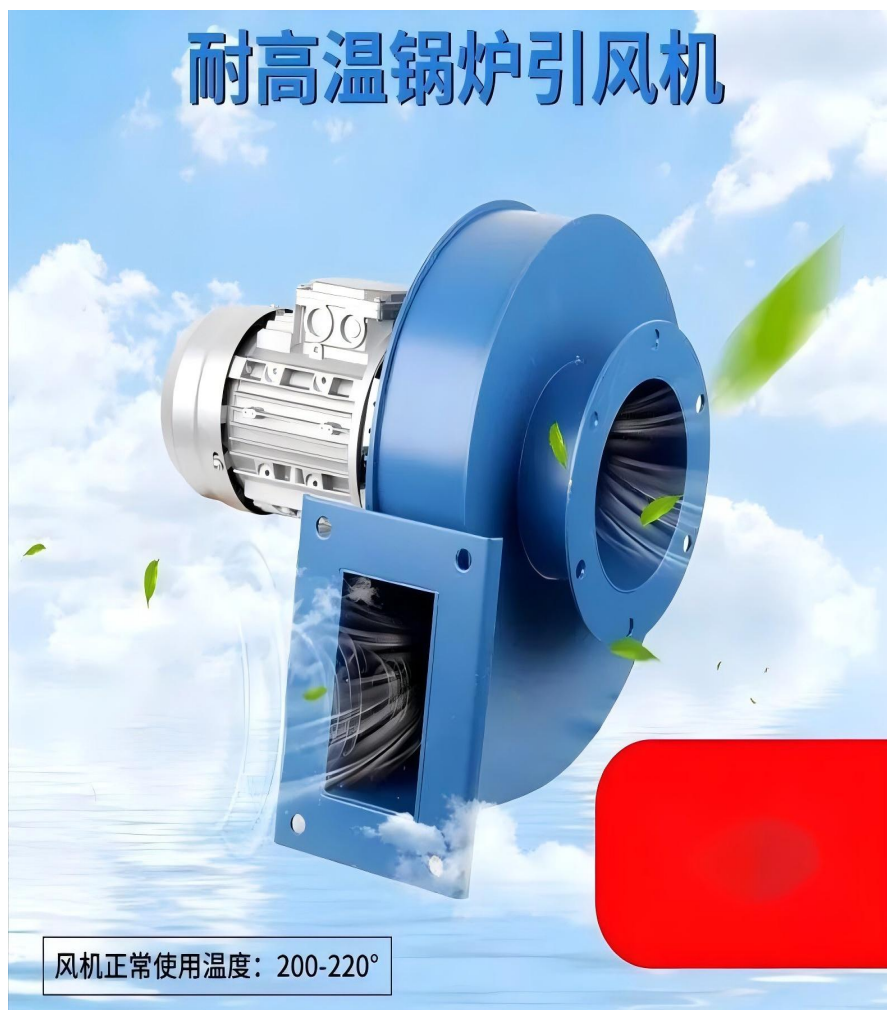





1 耐高温

电机采用耐高温设计
(隔热连接座，内设散热风叶)
高温优良轴承，高温线
高温绝缘材料等

2 国际Y2 铝合金电动机

纯铜线圈，优良矽钢片
强劲动力，每分钟旋转2800次

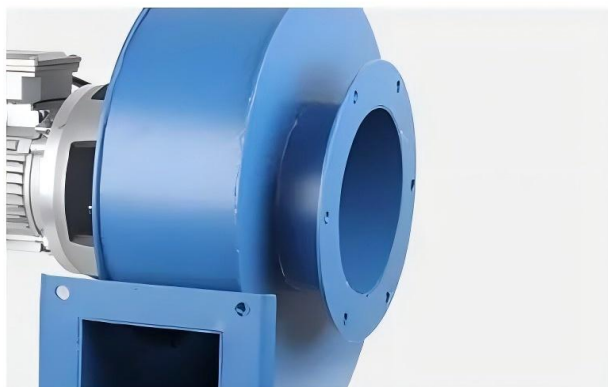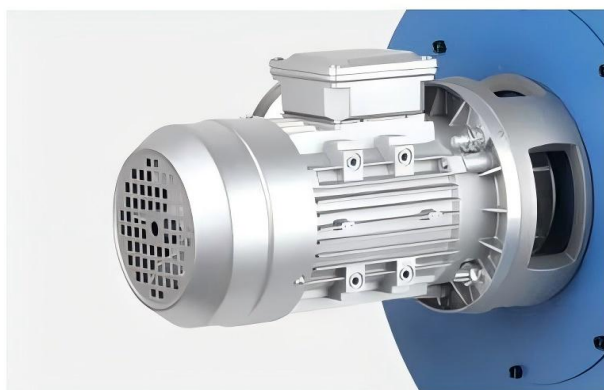


3 进风口

进风口一体成型，高强度
激光下料，安装精度高
优化进风导流，效率高，减少风损

4 风叶

风叶采用先进的动力学设计
低噪音、高效率、强吸力

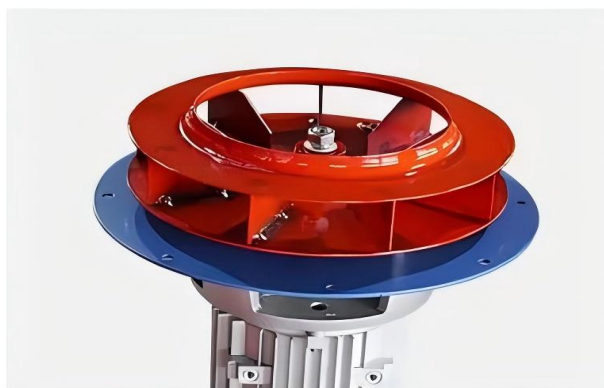

国内首创
专利产品

出厂形式：左旋0度，无脚(如图)

YN5-47

小型锅炉引风机(耐高温)

Boiler Induced Draft Fan (High Temperature Resistance)

产品简介 Product Brief

- 借鉴国外先进样机，根据锅炉行业专业研发、设计的新型锅炉风机。
- 耐高温、高效率、大风量、振动小、噪音低、风壳激光切割下料，造型美观。
- 电机采用Y2铝合金压铸材质，大幅降低重量，达到轻量化，方便安装，造型新颖。
- 电机主要元器件采用耐高温材料(高温轴承、高温油脂、高温绝缘材料等)。
- 采用隔热连接座(内设散热风叶)与风壳连接，对电机进行降温，确保电机高温下正常运转。
- 广泛应用于采暖炉、热风炉、数控锅炉、蒸汽锅炉、干燥、化工、食品、粮食机械等相关行业。
- 允许气体最高温度:180℃-200℃

- Draw lessons from foreign advanced prototype, according to the boiler industry professional research and development, design of new boiler fan.
- High temperature resistance, high efficiency, high air volume, low vibration, low noise, laser cutting of wind shells, beautiful shape.
- Y2 aluminium alloy die-casting material is used in the motor, which greatly reduces weight, achieves lightweight, convenient installation and novel shape.
- The main components of the motor are high temperature resistant materials (high temperature bearings, high temperature grease, high temperature insulation materials, etc.).
- The motor is cooled by connecting the heat insulating connecting seat (with internal cooling vanes) with the wind housing to ensure the normal operation of the motor at high temperature.
- Widely used in heating furnace, hot air stove, numerical control boiler, steam boiler, drying, chemical industry, food, grain machinery And other related industries.
- Normal operating temperature of fan: 180 °C-200°C

主要参数 Main parameter

型号 Model	功率 Power kw	电压 Voltage V	频率 Frequency Hz	转速 Speed r/min	流量 Flow m³/h	全压 Total Head Pa
YN5-47	60W	220/380	50	2800	240	310
YN5-47	90W	220/380	50	2800	350	360
YN5-47	120W	220/380	50	2800	480	450
YN5-47	180W	220/380	50	2800	650	510
YN5-47	250W	220/380	50	2800	860	580
YN5-47	370W	220/380	50	2800	1100	650
YN5-47	550W	220/380	50	2800	1450	680
YN5-47	750W	220/380	50	2800	1810	790
YN5-47	1.1KW	220/380	50	2800	2250	940
YN5-47	1.5KW	220/380	50	2800	2800	1140
YN5-47	2.2KW	220/380	50	2800	3100	1280
YN5-47	3KW	220/380	50	2800	3800	1580

注：如需更大功率，请选择4-72耐高温系列风机。

Note: If you need more power, please choose 4-72 series of high temperature resistant fans.

YN5-47风机(配脚架)

DF Fan (High Temperature Resistance)



– 在YN5-47风机基础上，可选配风机脚架，便于用户安装使用。

-On the basis of YN5-47 fan, it can be equipped with fan foot bracket, which is convenient for users to install and use.

YN5-47风机(配进/出风接口)

DF Fan (High Temperature Resistance)



– 在YN5-47风机基础上，可选配进/出风口接口，便于用户安装使用。

-On the basis of YN5-47 fan, the air inlet / outlet interface is optional, which is convenient for users to install and use.

YN5-47风机(不锈钢)

DF Fan (High Temperature Resistance)




– 在YN5-47风机基础上，采用不锈钢材质（风壳、风叶），从而增加耐高温、耐腐蚀性、耐磨性和更高强度和硬度。

-On the basis of yn5-47 fan, stainless steel material (wind shell, wind blade) is adopted to increase high temperature resistance, corrosion resistance, wear resistance and higher strength and hardness.

YN5-47风机(配进/出风法兰片)



DF Fan (High Temperature Resistance)

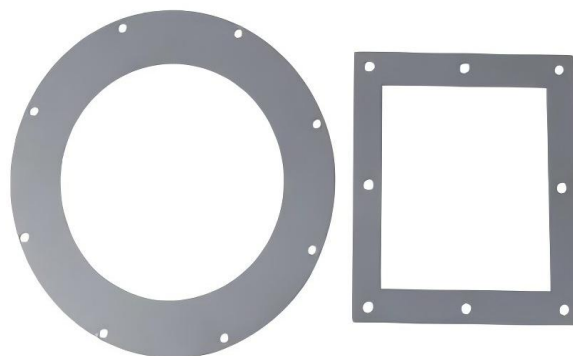

– 可选配进/出风口法兰片，便于用户焊接、安装使用。






-Optional air inlet / outlet flange, convenient for user welding, installation and use.

安装尺寸 Installation dimension

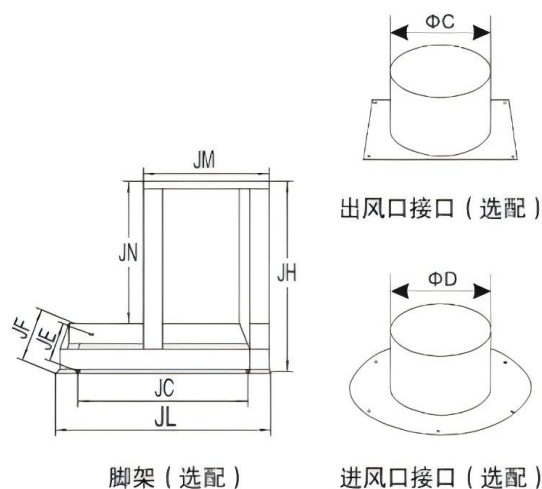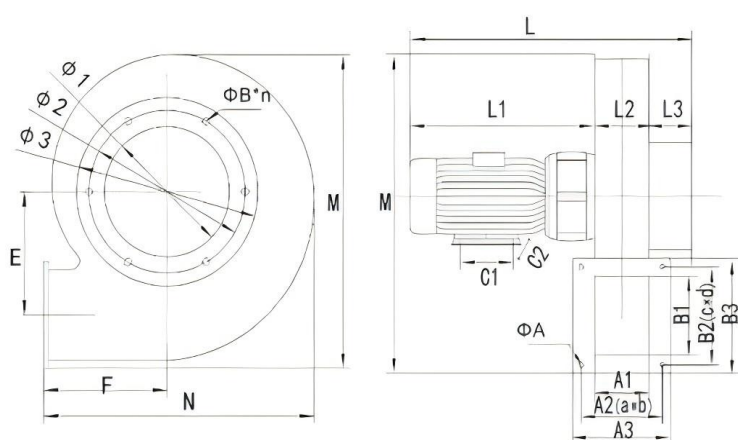

型号 Model	功率 Power	出风口法兰尺寸 Outlet flange size									进风口法兰尺寸 Inlet flange dimensions				接口(选配) Interface (optional)	
		A1	A2	A3	Φa*b	B1	B2	B3	Φc*d	ΦA	Φ1	Φ2	Φ3	ΦB*n	ΦC出口	ΦD进口
YN5-47	60w	61	95	118	1*95	60	95	118	1*95	8	100	135	156	Φ10*6	100	100
YN5-47	90w	59	85	122	1*85	85	115	141	1*115	10	100	135	156	Φ10*6	100	100
YN5-47	120w	60	92	138	1*92	110	150	176	1*150	10	108	146	166	Φ10*6	110	110
YN5-47	180w	60	92	138	1*92	110	150	176	1*150	10	108	146	166	Φ10*6	110	110
YN5-47	250w	62	93	139	1*93	121	160	186	1*160	11	128	180	207	Φ11*6	130	130
YN5-47	370w	78	109	155	1*109	121	160	186	1*160	11	128	180	207	Φ11*6	130	130
YN5-47	550w	85	116	162	1*116	136	176	202	1*176	11	150	200	224	Φ11*6	150	150
YN5-47	750w	102	133	179	1*133	136	176	202	2*88	11	150	200	224	Φ11*6	150	150
YN5-47	1.1kw	120	151	197	1*151	156	196	222	2*98	11	160	200	228	Φ11*6	165	165
YN5-47	1.5kw	131	162	208	1*162	176	216	242	2*108	11	160	200	228	Φ11*6	165	165
YN5-47	2.2kw	130	161	206	1*161	206	246	272	2*123	11	186	230	254	Φ11*6	190	190
YN5-47	3kw	155	188	217	2*94	180	213	243	2*106.5	11	213	254	284	Φ11*6	190	190

型号 Model	功率 Power	外形尺寸 Outline size										脚架尺寸 (选配) Scaffold size (optional)					
		C1	C2	L1	L2	L3	L	M	N	E	F	JM	JN	JH	JL	JC	JF
YN5-47	60W	70	90	192	65	41	298	221	193	72	95	130	140	170	240	160	208
YN5-47	90W	70	90	192	62	41	295	259	223	85	108	130	140	170	240	160	208
YN5-47	120W	70	90	192	64	41	297	325	281	107	131	130	140	170	240	160	208
YN5-47	180W	70	90	192	64	41	297	325	281	107	131	130	140	170	240	160	208
YN5-47	250W	80	100	220	67	47	334	370	320	127	148	130	140	170	240	160	208
YN5-47	370W	80	100	220	83	47	350	370	320	127	148	130	140	170	240	160	208
YN5-47	550W	90	112	275	90	43	408	420	364	148	167	150	180	210	240	154	230
YN5-47	750W	90	112	275	108	43	426	420	364	148	167	150	180	210	240	154	230
YN5-47	1.1KW	100	125	300	125	44	467	470	408	166	185	150	184	213	240	166	228
YN5-47	1.5KW	100	140	325	135	42	502	506	438	176	202	190	215	241	280	193	248
YN5-47	2.2KW	125	140	345	135	45	525	549	478	186	222	190	215	241	280	193	253
YN5-47	3KW	140	160	385	157	50	592	610	495	234	238	245	220	270	400	280	310

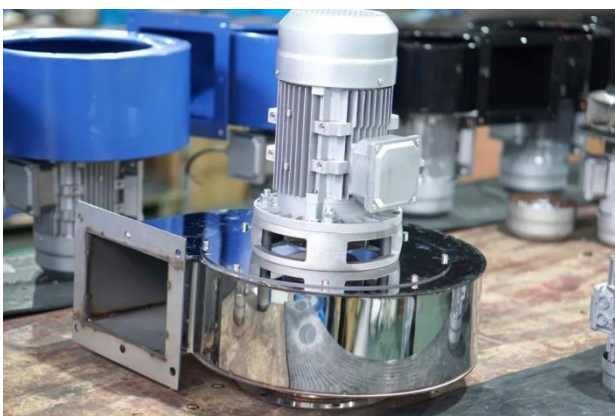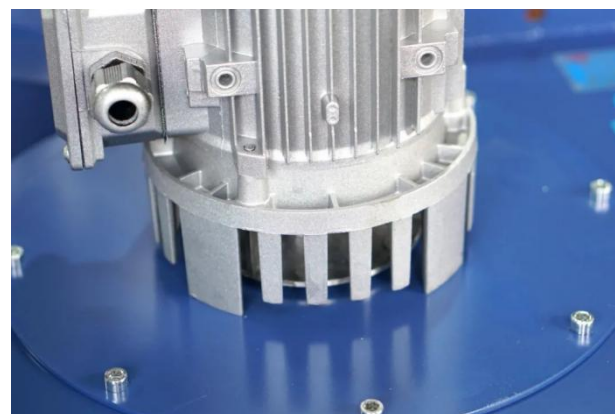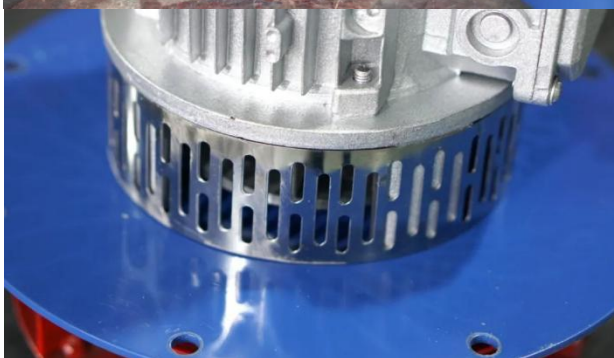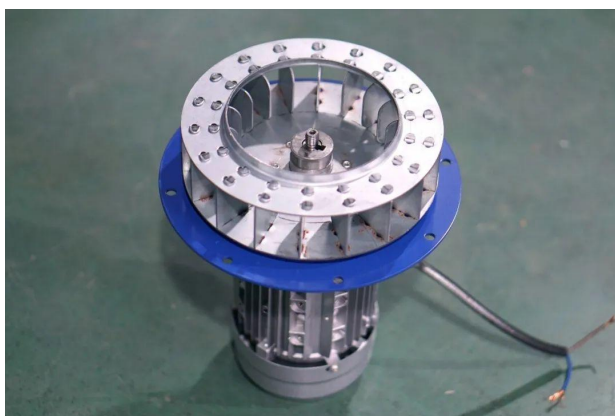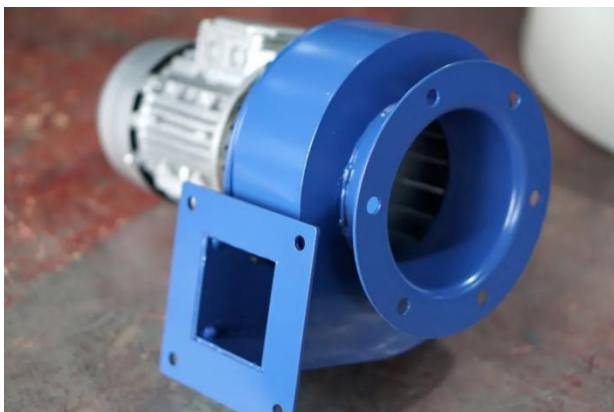

耐高温锅炉引风机



1 出风口圆口

出风口采用圆口法兰设计，方便管道的安装对接，出风流道好，噪音低，压力大。

2 进风法兰 通用老款尺寸

一体成型进风法兰，高强度，高精度。尺寸和老款铁壳法兰通用，方便替换、售后等。





3 铸铝风壳

风壳采用铝合金蜗牛式，科学的流道设计，大大降低了噪音，提高了风机的工作效率，更大风量、更大压力，更好的耐腐蚀性。

4 风冷耐高温

电机采用耐高温设计
隔热连接座，内设散热风叶
高温轴承，纯铜线圈，优良矽钢片，高温绝缘材料等



5 镀锌风叶

镀锌叶轮，高强度，更耐腐蚀、更耐高温，独特的叶片设计，低噪音，不易积灰，增加叶轮使用寿命。

6 加强优化面板流道

电机面板和进风面板，采用优质钢板经多道冲压成型，增加强度的同时也优化了风机内部流道，大大的降低了风机噪音和明显提高风机的风压和风





出厂形式：左旋0度，无脚(如图)

YNGL

小型锅炉引风机(耐高温)

Boiler Induced Draft Fan (High Temperature Resistance)

产品简介 Product Brief

- 借鉴国外先进样机，根据锅炉行业专业研发、设计的新型锅炉风机。
- 耐高温、高效率、大风量、低噪音、铝合金压铸外壳，造型美观。
- 电机采用Y2铝合金压铸材质，大幅降低重量，达到轻量化，方便安装，造型新颖。
- 电机主要元器件采用耐高温材料(高温轴承、高温油脂、高温绝缘材料等)。
- 采用隔热连接座(内设散热风叶)与风壳连接，对电机进行降温，确保电机高温下正常运转。
- 广泛应用于采暖炉、热风炉、数控锅炉、蒸汽锅炉、干燥、化工、食品、粮食机械等相关行业。
- 允许气体最高温度:180℃~200℃

- Draw lessons from foreign advanced prototype, according to the boiler industry professional research and development, design of new boiler fan.
- High temperature resistance, high efficiency, large air volume, low noise, aluminum alloy die-casting shell, beautiful shape.
- Y2 aluminium alloy die-casting material is used in the motor, which greatly reduces weight, achieves lightweight, convenient installation and novel shape.
- The main components of the motor are high temperature resistant materials (high temperature bearings, high temperature grease, high temperature insulation materials, etc.).
- The motor is cooled by connecting the heat insulating connecting seat (with internal cooling vanes) with the wind housing to ensure the normal operation of the motor at high temperature.
- Widely used in heating furnace, hot air stove, numerical control boiler, steam boiler, drying, chemical industry, food, grain machinery and other related industries.
- Normal operating temperature of fan: 180 °C - 200 °C


主要参数 Main parameter

型号 Model	功率 Power kw	电压 Voltage V	频率 Frequency Hz	转速 Speed r/min	流量 Flow m³/h	全压 Total Head Pa
YNGL	60W	220/380	50	2800	240	310
YNGL	90W	220/380	50	2800	350	360
YNGL	120W	220/380	50	2800	480	450
YNGL	180W	220/380	50	2800	650	510
YNGL	250W	220/380	50	2800	860	580
YNGL	370W	220/380	50	2800	1100	650
YNGL	550W	220/380	50	2800	1450	680
YNGL	750W	220/380	50	2800	1810	790
YNGL	1.1KW	220/380	50	2800	2250	940
YNGL	1.5KW (铁壳)	220/380	50	2800	2800	1140
YNGL	2.2KW (铁壳)	220/380	50	2800	3100	1280
YNGL	3KW (铁壳)	220/380	50	2800	3800	1580

注：如需更大功率，请选择4-72耐高温系列风机。


Note: If you need more power, please choose 4-72 series of high temperature resistant fans.

安装尺寸 Installation dimension

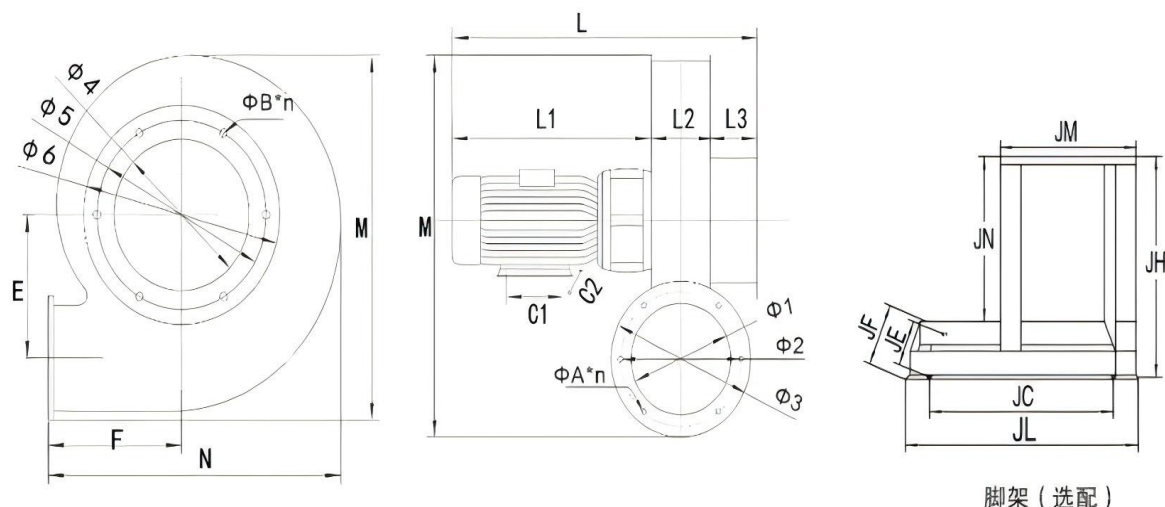

型号 Model	功率 Power	出风口法兰尺寸 Outlet flange size				进风口法兰尺寸 Inlet flange dimensions			
		$\phi 1$	$\phi 2$	$\phi 3$	$\phi A \times n$	$\phi 4$	$\phi 5$	$\phi 6$	$\phi B \times n$
YNGL	60w	85	120	138	$\phi 7 \times 4$	105	135	162	$\phi 9 \times 6$
YNGL	90w	85	120	138	$\phi 7 \times 4$	105	135	162	$\phi 9 \times 6$
YNGL	120w	95	130	148	$\phi 7 \times 4$	110	146	170	$\phi 9 \times 6$
YNGL	180w	95	130	148	$\phi 7 \times 4$	110	146	170	$\phi 9 \times 6$
YNGL	250w	115	150	168	$\phi 7 \times 4$	138	180	205	$\phi 9 \times 6$
YNGL	370w	115	150	168	$\phi 7 \times 4$	138	180	205	$\phi 9 \times 6$
YNGL	550w	140	180	198	$\phi 7 \times 6$	160	200	225	$\phi 9 \times 6$
YNGL	750w	140	180	198	$\phi 7 \times 6$	160	200	225	$\phi 9 \times 6$
YNGL	1.1kw	150	180	198	$\phi 7 \times 6$	160	200	225	$\phi 9 \times 6$

型号 Model	功率 Power	外形尺寸 Outline size										脚架尺寸 (选配) Scaffold size (optional)							
		C1	C2	L1	L2	L3	L	M	N	E	F	JM	JN	JH	JL	JC	JF	JE	
YNGL	60W	70	90	192	83	40	320	262	230	87	105	130	140	170	240	160	208	153	
YNGL	90W	70	90	192	83	40	320	262	230	87	105	130	140	170	240	160	208	153	
YNGL	120W	70	90	192	90	40	328	306	270	108	123	130	140	170	240	160	208	153	
YNGL	180W	70	90	192	90	40	328	306	270	108	123	130	140	170	240	160	208	153	
YNGL	250W	80	100	220	112	42	377	356	320	126	137	130	140	170	240	160	208	153	
YNGL	370W	80	100	220	112	42	377	356	320	126	137	130	140	170	240	160	208	153	
YNGL	550W	90	112	265	125	46	440	394	355	134	155	150	180	210	240	154	230	175	
YNGL	750W	90	112	265	125	46	440	394	355	134	155	150	180	210	240	154	230	175	
YNGL	1.1KW	100	125	288	128	46	460	430	390	150	166	150	184	213	240	166	228	204	

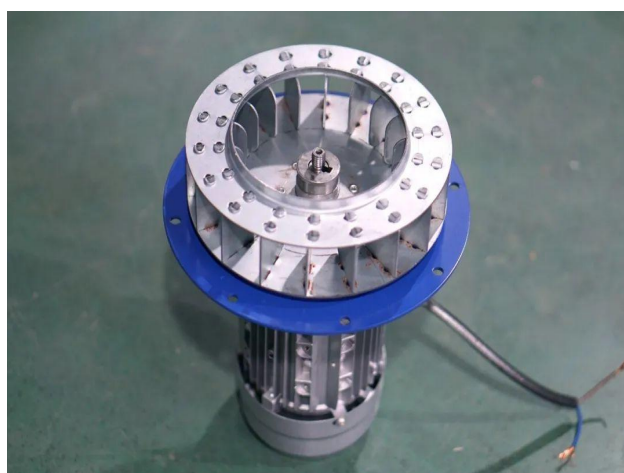



1

配用节能高效电机

高效、节能环保、使用寿命长
电机采用优良材质，运行平稳



静音专用轴承
稳定运行，耐磨损



100%铜线
寿命高达5年以上



优良外壳
坚固、不生锈、耐高温

2 碳钢加厚外壳

风壳采用冷轧碳钢材质，
钢板加厚，强度好，美观大方。
后经喷塑处理，耐腐蚀防生锈，
耐高温，抗震防摔。



3 多翼式高强度叶轮

国内首创，多项专利
加厚叶片，独特结构，
高强度，防腐蚀，不易粘油。
动平衡校正，运行平稳。
风量大、噪音低、节能高效。

4 进口法兰(导流器)

方便客户法兰对接。
优化后的导流器，高效进风。
减少风叶间隙，降低噪音，
增加效率。



5 产品包装

小型号采用纸箱包装，内配脚架，减少运输费用。
大型号采用蛇皮袋包装(后罩泡沫防护)，防止运输损坏。



专利产品
二级能效



出厂形式：左旋90度(如图)

CF-11

低噪音多翼式离心风机

Low Noise Multi-Wing Centrifugal Fan

产品简介 Product Brief


- 高效率、低转速、低噪音、大风量、寿命长。
- 采用先进的空气动力叶轮结构、对数螺旋形机壳，具有结构新颖紧凑、振动小、使用调节方便等特点。
- 电机采用Y2、YY系列高效节能电机，高效率、低能耗、造型美观大方。
- 广泛应用于单位食堂、宾馆酒楼、饭店等公共场所的厨房排风、抽油烟的通风换气。
- 特别适用于粮食机械、化工机械、塑料机械、干燥机械、食品机械等相关行业。
- 气体温度 $\leq 80^{\circ}\text{C}$ ，尘土及固体杂质 $\leq 150\text{mg}/\text{m}^3$ 。
- High efficiency, low speed, low noise, high air volume, long service life.
- With advanced aerodynamic impeller structure and logarithmic spiral shell, it has novel and compact structure and small vibration.
- It is easy to use and adjust. Y2 and YY series of high-efficiency and energy-saving motors are used in the motor. They are high efficiency, low energy consumption, beautiful and generous in appearance.
- Widely used in kitchen ventilation, lampblack ventilation and ventilation in public places such as canteens, hotels, restaurants, etc.
- Particularly suitable for grain machinery, chemical machinery, plastic machinery, drying machinery, food machinery and other related industries.
- Gas temperature is less than 80°C , dust and solid impurities are less than $150\text{ mg}/\text{m}^3$.

主要参数 Main parameter

型号 Model	功率 Power kw	电压 Voltage V	频率 Frequency Hz	转速 Speed r/min	流量 Flow m^3/h	全压 Total Head Pa	噪音 Noise dB(A)
CF-11-1.5A	0.55KW-2P	380/220	50	2830	830-1080	912-720	$\square 72$
CF-11-2A	1.1KW-2P 0.25KW-4P	380/220 380/220	50 50	2830 1450	1440-2250 790-1120	1037-790 380-260	≤ 74 ≤ 67
CF-11-2.5A	S-0.75KW-4P	380/220	50	1450	1900-2800	490-390	≤ 68
*CF-11-2.5A1	S-0.75KW-4P	380/220	50	1450	1700-2600	530-420	≤ 69
CF-11-2.8A	0.75KW-4P	380/220	50	1450	2500-3800	550-420	≤ 68
*CF-11-2.8A1	0.75KW-4P	380/220	50	1450	2100-3500	650-470	≤ 69
CF-11-3A	S-1.5KW-4P	380/220	50	1450	2890-4300	760-640	≤ 70
CF-11-3A2	S-1.5KW-4P	380/220	50	1450	3100-5000	730-580	≤ 73
*CF-11-3A1	S-1.5KW-4P	380/220	50	1450	2600-3900	820-670	≤ 74
CF-11-3.2A	S-2.2KW-4P	380/220	50	1450	4400-6200	890-650	≤ 73
CF-11-3.5A	S-3KW-4P	380/220	50	1450	5100-6700	1200-950	≤ 75
CF-11-4A	4KW-4P 1.5KW-6P	380 380	50 50	1450 960	6312-10588 4590-7300	1402-1140 650-507	≤ 78 ≤ 68
CF-11-4.5A	5.5KW-4P 3KW-6P	380 380	50 50	1450 960	7100-12300 6740-10700	1590-1200 870-678	≤ 80 ≤ 72

注：*标的型号为定制窄壳款。

安装尺寸 Installation dimension

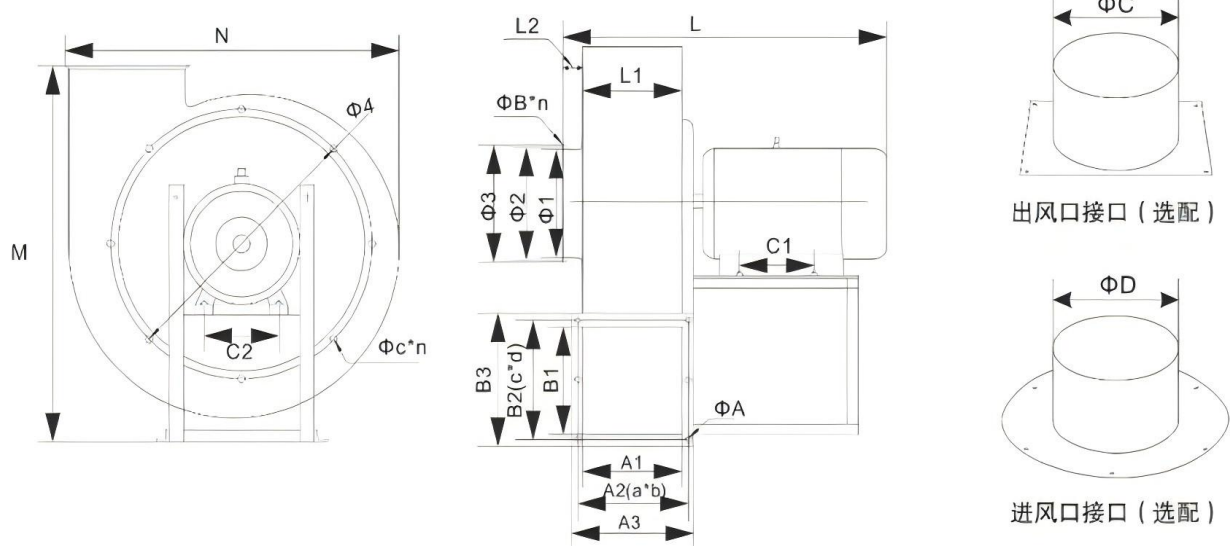

型号 Model	出风口法兰尺寸 Outlet flange size									进风口法兰尺寸 Inlet flange dimensions			
	A1	A2	A3	a*b	B1	B2	B3	c*d	ΦA	$\Phi 1$	$\Phi 2$	$\Phi 3$	$\Phi B \cdot n$
CF-11-1.5A	110	138	159	69*2	100	124	147	62*2	7	150	182	200	$\Phi 7 \cdot 6$
CF-11-2A	130	156	181	78*2	155	180	205	90*2	7	178	205	230	$\Phi 8.5 \cdot 6$
CF-11-2.5A	160	191	220	95.5*2	178	209	237	104.5*2	9	210	240	268	$\Phi 8.5 \cdot 6$
*CF-11-2.5A1	130	164	180	164*1	170	192	216	96*2	9	210	240	268	$\Phi 8.5 \cdot 6$
CF-11-2.8A	160	192	230	96*2	205	237	265	79*3	9	240	267	295	$\Phi 8.5 \cdot 6$
*CF-11-2.8A1	130	162	200	81*2	205	237	265	79*3	9	240	267	295	$\Phi 8.5 \cdot 6$
CF-11-3A	160	191	230	95.5*2	225	255	286	85*3	9	260	288	316	$\Phi 8.5 \cdot 8$
CF-11-3A2	210	242	280	121*2	225	255	286	85*3	9	260	288	316	$\Phi 8.5 \cdot 8$
*CF-11-3A1	130	162	200	81*2	225	255	286	85*3	9	260	288	316	$\Phi 8.5 \cdot 8$
CF-11-3.2A	210	244	272	122*2	240	276	303	92*3	9	280	312	338	$\Phi 9 \cdot 8$
CF-11-3.5A	210	242	280	121*2	255	285	316	95*3	9	310	338	366	$\Phi 9 \cdot 8$
CF-11-4A	230	268	395	134*2	278	313	341	104.5*3	9	360	392	420	$\Phi 9 \cdot 8$
CF-11-4.5A-4P	230	265	295	132.5*2	310	345	375	115*3	9	405	430	460	$\Phi 9 \cdot 8$
CF-11-4.5A-6P	230	265	295	133*2	320	348	376	116*3	9	420	490	512	$\Phi 9 \cdot 12$

型号 Model	外形尺寸 Outline size									接口 (选配) I/O	
	M	N	L	L1	L2	C1	C2	$\Phi 4$	$\Phi c \cdot n$	ΦC 出口	ΦD 进口
CF-11-1.5A	378	298	375	110	40	90	112	180	$\Phi 5 \cdot 4$	100	100
CF-11-2A	415	389	375	130	40	100	125	230	$\Phi 8 \cdot 8$	150	160
CF-11-2.5A	460	438	425	160	40	100	125	280	$\Phi 8 \cdot 8$	200	200
*CF-11-2.5A1	460	438	395	130	40	100	125	280	$\Phi 8 \cdot 8$	200	200
CF-11-2.8A	515	512	425	160	40	100	140	315	$\Phi 8 \cdot 8$	200	200
*CF-11-2.8A1	515	512	395	130	40	100	140	315	$\Phi 8 \cdot 8$	200	200
CF-11-3A	575	565	468	160	40	125	140	336	$\Phi 8 \cdot 8$	250	250
CF-11-3A2	575	565	520	210	40	125	140	336	$\Phi 8 \cdot 8$	250	250
*CF-11-3A1	575	562	464	130	40	125	140	336	$\Phi 8 \cdot 8$	250	250
CF-11-3.2A	590	593	559	210	40	125	140	360	$\Phi 8 \cdot 8$	250	250
CF-11-3.5A	638	634	564	210	40	140	160	386	$\Phi 8 \cdot 8$	300	300
CF-11-4A	710	718	617	250	32	140	190	440	$\Phi 8 \cdot 8$	300	300
CF-11-4.5A-4P	773	765	760	250	45	140	216	483	$\Phi 8 \cdot 12$	300	300
CF-11-4.5A-6P	690	761	690	280	45	140	160	483	$\Phi 8 \cdot 12$	300	300

注：*标的型号为定制窄壳款。



11-62多翼式低噪音离心风机

吸力强

风量大

噪音低



1

配用节能高效电机

高效、节能环保、使用寿命长
电机采用优良材质，运行平稳



静音专用轴承
稳定运行，耐磨损



100%铜线
寿命高达5年以上



优良外壳
坚固、不生锈、耐高温

2 碳钢加厚外壳

风壳采用冷轧碳钢材质，
钢板加厚，强度好，美观大方。
后经喷塑处理，耐腐蚀防生锈，
耐高温，抗震防摔。



3 多翼式高强度叶轮

国内首创，多项专利
加厚叶片，独特结构，
高强度，防腐蚀，不易粘油。
动平衡校正，运行平稳。
风量大、噪音低、节能高效。

4 进口法兰(导流器)

方便客户法兰对接。
优化后的导流器，高效进风。
减少风叶间隙，降低噪音，
增加效率。



5 产品包装

小型号采用纸箱包装，内配脚架，减少运输费用。
大型号采用蛇皮袋包装(后罩泡沫防护)，防止运输损坏。



专利产品
二级能效



出厂形式：右旋90度(如图)

11-62

低噪音多翼式离心风机

Low Noise Multi-Wing Centrifugal Fan


产品简介 Product Brief

- 高效率、低转速、低噪音、大风量、寿命长。
- 采用先进的空气动力叶轮结构、对数螺旋形机壳，具有结构新颖紧凑、振动小、使用调节方便等特点。
- 电机采用Y2、YY系列高效节能电机，高效率、低能耗、造型美观大方。
- 广泛应用于空调机组、大小宾馆、酒楼通风换气或抽油烟；也可作为一般建筑物室内外通风换气。
- 输送介质为空气或其他不自燃、对人体无害气体，介质不含粘性物质。
- 气体温度 $\leq 80^{\circ}\text{C}$ ，尘土及固体杂质 $\leq 150\text{mg}/\text{m}^3$ 。
- High efficiency, low speed, low noise, high air volume, long service life.
- With advanced aerodynamic impeller structure and logarithmic spiral shell, it has the characteristics of novel and compact structure, small vibration and easy to use and adjust.
- Y2, YY series of high-efficiency and energy-saving motors are used in the motor. They are high efficiency, low energy consumption, beautiful and generous in appearance.
- Widely used in air conditioning units, large and small hotels, restaurants ventilation or smoke; can also be used as indoor and outdoor ventilation of general buildings.
- Transport medium is air or other non-spontaneous combustion, harmless gas to human body, medium does not contain viscous substances.
- Gas temperature is less than 80°C , dust and solid impurities are less than $150\text{ mg}/\text{m}^3$.

主要参数 Main parameter

型号 Model	功率 Power kw	电压 Voltage V	频率 Frequency Hz	转速 Speed r/min	流量 Flow m^3/h	全压 Total Head Pa	噪音 Noise dB(A)
11-62-2.5A	0.75KW-4P	380/220	50	1450	1700-3300	450-350	≤ 65
11-62-2.8A	1.1KW-4P	380/220	50	1450	2600-4600	570-440	≤ 66
11-62-3A	1.5KW-4P	380/220	50	1450	3100-5500	600-450	≤ 67
11-62-3.2A	2.2KW-4P	380/220	50	1450	4600-6700	760-570	≤ 71
	1.1KW-6P	380	50	960	2600-5000	400-320	≤ 63
11-62-3.5A	3KW-4P	380/220	50	1450	5300-8700	910-700	≤ 76
	1.5KW-6P	380	50	960	2900-6400	480-390	≤ 68
11-62-4A	5.5KW-4P	380	50	1450	6400-12000	1350-1030	≤ 78
	2.2KW-6P	380	50	960	5710-9200	550-415	≤ 70
11-62-4.5A	7.5KW-4P	380	50	1450	7500-14300	1520-1120	≤ 80
	4KW-6P	380	50	960	7820-13100	750-562	≤ 72
11-62-5A	5.5KW-6P	380	50	960	10800-18200	950-713	≤ 75

安装尺寸 Installation dimension

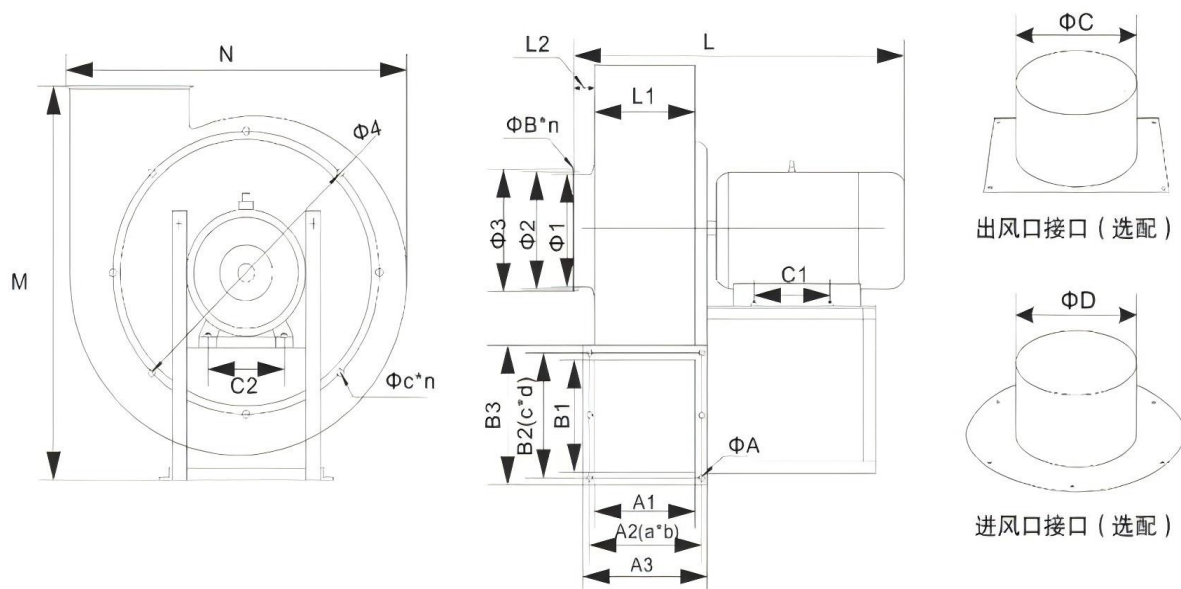

型号机号 Model	出风口法兰尺寸 Outlet flange size									进风口法兰尺寸 Inlet flange dimensions			
	A1	A2	A3	a*b	B1	B2	B3	c*d	ΦA	$\Phi 1$	$\Phi 2$	$\Phi 3$	$\Phi B \cdot n$
11-62-2.5A	190	221	249	110.5*2	178	209	237	104.5*2	9	210	240	268	$\Phi 8.5 \cdot 6$
11-62-2.8A	230	261	300	87*3	205	237	266	79*3	9	240	267	295	$\Phi 8.5 \cdot 6$
11-62-3A	260	290	330	96.5*3	225	255	286	85*3	9	260	288	316	$\Phi 8.5 \cdot 8$
11-62-3.2A	260	294	322	98*3	240	276	303	92*3	9	280	312	338	$\Phi 9 \cdot 8$
11-62-3.5A	260	290	330	96.5*3	255	285	316	95*3	9	310	338	366	$\Phi 9 \cdot 8$
11-62-4A	280	318	345	106*3	278	313	341	104.5*3	9	360	392	420	$\Phi 9 \cdot 8$
11-62-4.5A-4P	280	315	345	105*3	310	345	375	115*3	9	405	430	460	$\Phi 9 \cdot 8$
11-62-4.5A-6P	310	343	371	114.5*3	320	348	376	116*3	9	420	490	512	$\Phi 9 \cdot 12$
11-62-5A	310	343	371	114.5*3	360	388	416	129.5*3	9	420	490	512	$\Phi 9 \cdot 12$


型号机号 Model	电机功率 Power	外形尺寸 Outline size									接口 (选配) I/O	
		M	N	L	L1	L2	C1	C2	$\Phi 4$	$\Phi c \cdot n$	ΦC 出口	ΦD 进口
11-62-2.5A	0.55KW-4P	486	440	457	190	40	100	125	280	$\Phi 8 \cdot 8$	200	200
11-62-2.8A	1.1KW-4P	542	517	553	230	40	100	140	315	$\Phi 8 \cdot 8$	200	200
11-62-3A	1.5KW-4P	575	562	590	270	40	125	140	336	$\Phi 8 \cdot 8$	250	250
11-62-3.2A	2.2KW-4P	592	600	625	270	40	140	160	360	$\Phi 8 \cdot 8$	250	250
	1.1KW-6P	592	600	625	270	40	125	140	360	$\Phi 8 \cdot 8$	250	250
11-62-3.5A	3KW-4P	640	620	614	270	40	140	160	386	$\Phi 8 \cdot 8$	300	300
	1.5KW-6P	640	620	614	270	40	140	160	386	$\Phi 8 \cdot 8$	300	300
11-62-4A	5.5KW-4P	710	720	710	300	40	140	216	440	$\Phi 8 \cdot 8$	300	300
	2.2KW-6P	710	720	710	300	40	140	190	440	$\Phi 8 \cdot 8$	300	300
11-62-4.5A	7.5KW-4P	768	770	710	300	45	140	216	483	$\Phi 8 \cdot 12$	300	300
11-62-4.5A	4KW-6P	690	761	710	300	45	140	190	483	$\Phi 8 \cdot 12$	300	300
11-62-5A	5.5KW-6P	845	850	760	315	50	140	216	538	$\Phi 8 \cdot 16$	350	350

4-72型离心风机

风量大

噪音低

振动小

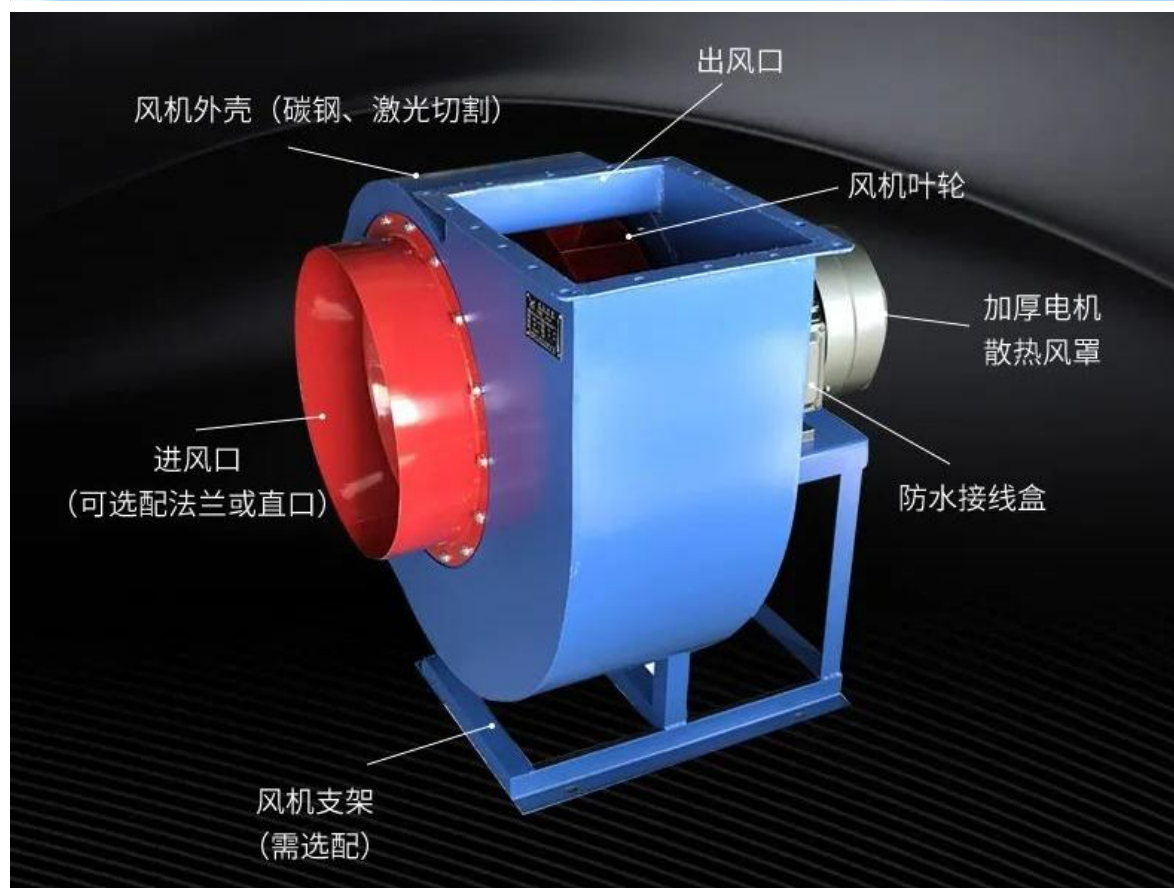




1

配用节能高效电机

高效、节能环保、使用寿命长
电机采用优良材质，运行平稳



静音专用轴承
稳定运行，耐磨损



全部铜线
寿命高达5年以上



优良外壳
坚固、不生锈、耐高温

2 风冷耐高温设计

(需选配)

专利产品，首创铝连接座
(内设散热风叶)，阻断温度传递，
延长电机高温下使用寿命！



3 加厚外壳

风壳和风机支架采用加厚钢板材料，
强度好，美观大方。
后经喷塑处理，耐腐蚀防生锈，
耐高温，抗震防摔。
风壳的出风口角度任意方向可调。

4 叶轮

后倾式叶轮，加厚叶片，强度高，风量大、噪音低、振动小。动平衡校正，运行平稳，寿命长。叶轮可制作成左旋、右旋，方便客户位置安装。




5 进风口（导流器） 进风口多种对接方式

可选直口和法兰对接。方便用户使用优化后的导流器，高效进风。减少风叶间隙，降低噪音，增加效率。

6 产品包装

采用蛇皮袋包装(后罩泡沫防护)，防止运输损坏。

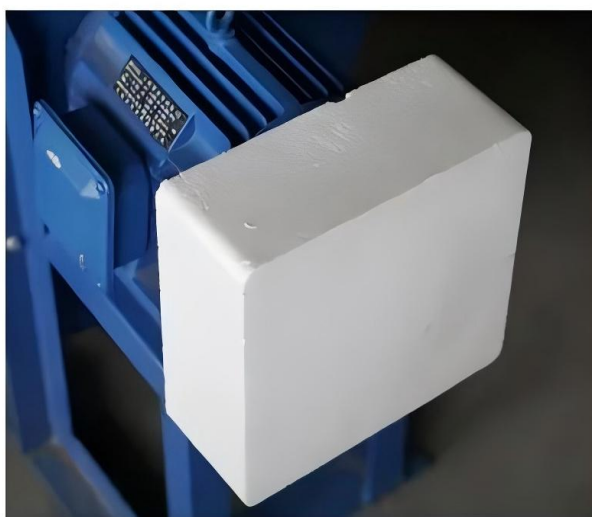



4-72

离心风机

Centrifugal fan



耐高温\配脚架

出厂形式：右旋90度,无脚架(如图)


产品简介 Product Brief

- 风量大、振动小、噪音低。激光切割下料,大大提高产品精度,造型美观大方。
- 电机采用YE系列高效节能电机,高效率、低能耗、质量好、寿命长。
- 广泛应用于工矿企业、大型建筑、工厂、宾馆酒楼等室内外通风换气。
- 特别适用于采暖炉、热风炉、干燥、化工、食品、粮食机械等相关行业。
- 可选配耐高温型加长轴电机,耐高温200℃。
- Large air volume, low vibration and low noise. Laser cutting blanking greatly improves the accuracy of the product, and the shape is beautiful and generous.
- YE series of high-efficiency and energy-saving motors are used in the motor, with high efficiency, low energy consumption, good quality and long service life.
- Widely used in industrial and mining enterprises, large buildings, factories, hotels, restaurants and other indoor and outdoor ventilation.
- Particularly suitable for heating furnace, hot blast stove, drying, chemical industry, food, grain machinery and other related industries.
- Optional high temperature resistant extended shaft motor, high temperature resistant 200℃.

主要参数 Main parameter


型号 Model	功率 Power kw	电压 Voltage V	频率 Frequency Hz	转速 Speed r/min	流量 Flow m³/h	全压 Total Head Pa
4-72 2.5A	0.75KW-2	380	50	2830	785-1550	750-455
	1.1KW-2	380	50	2830	805-1677	792-483
4-72 2.8A	1.5KW-2	380	50	2840	1131-2356	994-606
4-72 3.2A	1.1KW-4	380	50	1450	884-1758	324-198
	2.2KW-2	380	50	2840	1688-3517	1300-792
4-72 3.6A	1.1KW-4	380	50	1450	1332-2634	393-247
	3KW-2	380	50	2870	2664-5268	1578-989
	4KW-2	380	50	2890	2850-5500	1686-1030
4-72 4A	1.1KW-4	380	50	1450	2006-3709	501-329
	4KW-2	380	50	2900	3856-7238	1910-1267
	5.5KW-2	380	50	2900	4012-7419	2014-1320
4-72 4.5A	1.1KW-4	380	50	1450	2856-5281	634-416
	7.5KW-2	380	50	2900	5712-10562	2554-1673
4-72 5A	2.2KW-4	380	50	1450	3864-7728	790-502
	11KW-2	380	50	2900	7228-13500	2890-1856
	15KW-2	380	50	2900	7728-15455	3187-2019
4-72 5.6A	3KW-4	380	50	1450	7062-9885	975-759
4-72 6A	4KW-4	380	50	1450	6677-13353	1139-724
	1.5KW-6	380	50	960	4420-8841	498-317
4-72 6.3A	7.5KW-4	380	50	1450	7729-15458	1256-798
4-72 7.1A	11KW-4	380	50	1450	12676-20513	1573-1168
	3KW-6	380	50	960	8392-13581	689-512



安装尺寸 Installation dimension

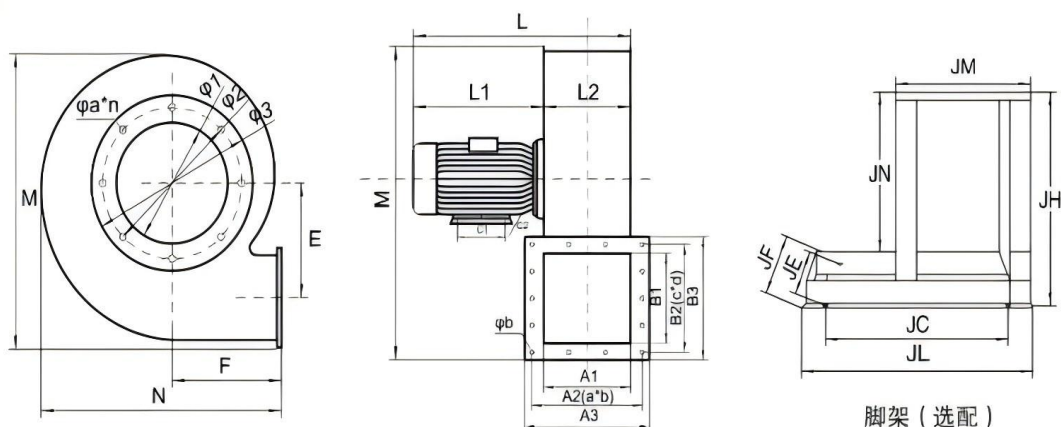

型号 Model	出风口尺寸 Outlet flange size					进风法兰尺寸 (选配) Inlet flange dimensions							
	A1	A2	A3	a*b	B1	B2	B3	c*d	Φb	Φ1	Φ2	Φ3	Φa*π
4-72 2.5A	165	196	230	3*65	200	235	265	3*78	Φ10	255	280	305	Φ10*8
4-72 2.8A	197	231	272	3*77	214	256	282	4*64	Φ10	278	312	335	Φ11*8
4-72 3.2A	216	252	291	3*84	246	284	310	4*71	Φ10	315	352	376	Φ11*8
4-72 3.6A	252	291	332	3*97	275	312	340	3*104	Φ10	360	390	413	Φ11*8
4-72 4A	285	315	340	4*79	325	360	388	5*72	Φ11	400	437	465	Φ12*16
4-72 4.5A	320	350	380	4*88	360	395	425	5*78	Φ11	440	492	520	Φ13*16
4-72 5A	358	385	416	4*97	400	440	468	4*109	Φ11	490	540	565	Φ13*16
4-72 5.6A	370	422	480	4*105.5	455	497	531	5*99.5	Φ11	560	595	620	Φ13*16
4-72 6A	420	475	500	5*95	481	530	560	5*106	Φ11	600	637	660	Φ13*16
4-72 6.3A	440	500	530	5*100	504	550	584	5*100	Φ11	632	666	700	Φ13*16
4-72 7.1A	497	553	597	5*110.5	580	615	675	5*123	Φ11	718	755	793	Φ13*16

型号 Model	功率 Power	外形尺寸 Outline size										脚架尺寸 (选配) Scaffold size (optional)						
		L	L1	L2	M	N	E	F	C1	C2	JM	JN	JH	JL	JC	JF	JE	
4-72 2.5A	0.75/1.1KW-2	420	255	165	476	410	174	175	100	125	200	280	320	395	310	300	260	
4-72 2.8A	1.5KW-2	477	275	202	565	471	198	207	100	140	200	280	320	395	310	300	260	
4-72 3.2A	1.1KW-4	522	300	222	643	538	228	234	125	140	200	280	320	395	310	300	260	
	2.2KW-2	522	300	222	643	538	228	234	125	140	200	280	320	395	310	300	260	
4-72 3.6A	1.1KW-4	533	275	258	711	597	251	256	100	140	280	335	375	470	300	355	320	
	3/4KW-2	583	325	258	711	597	251	256	140	160	280	335	375	470	300	355	320	
4-72 4A	1.1KW-4	560	275	285	766	680	280	296	100	140	320	405	445	560	385	400	370	
	5.5KW-2	685	400	285	766	680	280	296	140	216	320	405	445	560	385	400	370	
4-72 4.5A	1.1KW-4	595	275	320	857	756	316	328	100	140	320	405	445	560	385	400	370	
	7.5KW-2	720	400	320	857	756	316	328	140	216	320	405	445	560	385	400	370	
4-72 5A	2.2KW-4	683	325	358	963	825	442	465	140	160	420	500	540	730	565	480	445	
	11/15KW-2	808	450	358	963	825	442	465	210	254	420	500	540	730	565	480	445	
4-72 5.6A	3KW-4	750	430	360	1118	916	391	385	140	160	400	543	583	625	580	375	335	
4-72 6A	4KW-4	823	403	420	1180	980	420	408	140	190	435	595	635	740	700	420	380	
	1.5KW-6	823	403	420	1180	980	420	408	140	160	435	595	635	740	700	420	380	
4-72 6.3A	7.5KW-4	850	400	440	1235	1090	439	432	140	216	480	638	678	810	770	435	395	
4-72 7.1A	11KW-4	1050	565	485	1422	1202	495	522	210	254	500	680	720	937	732	486	436	
	3KW-6	1050	565	485	1422	1202	495	522	140	160	500	680	720	937	732	486	436	

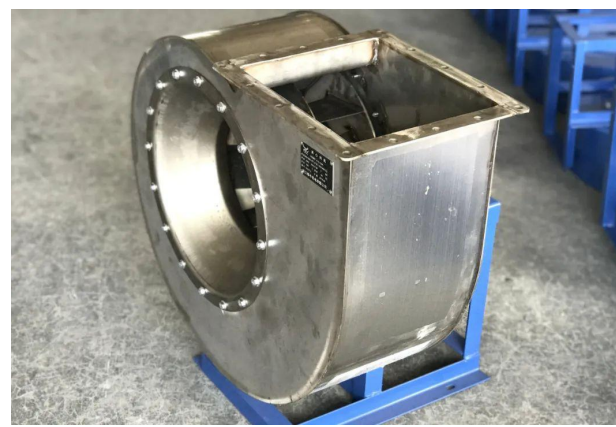

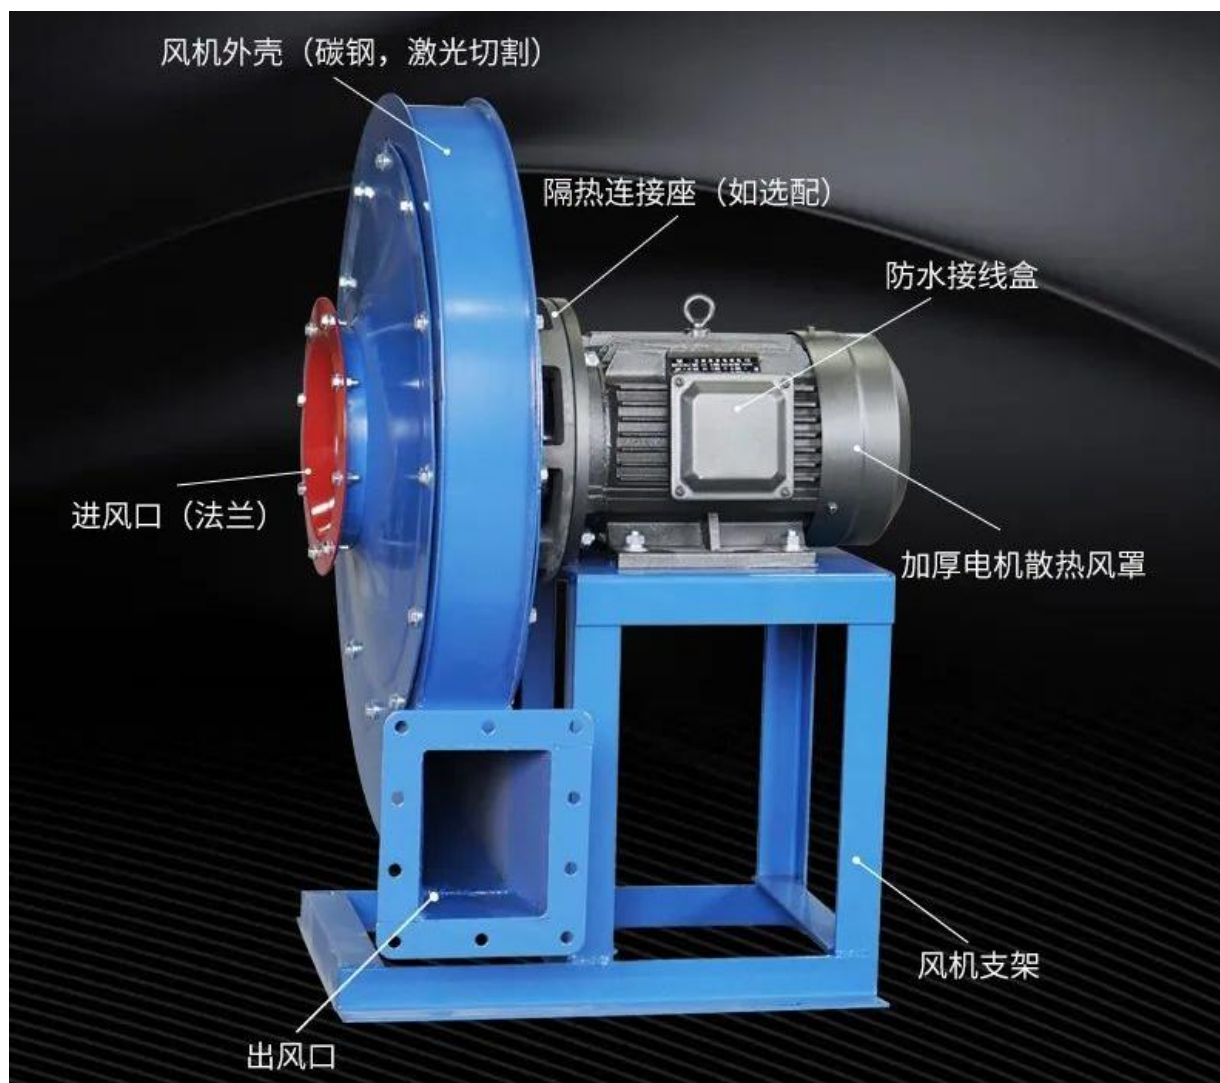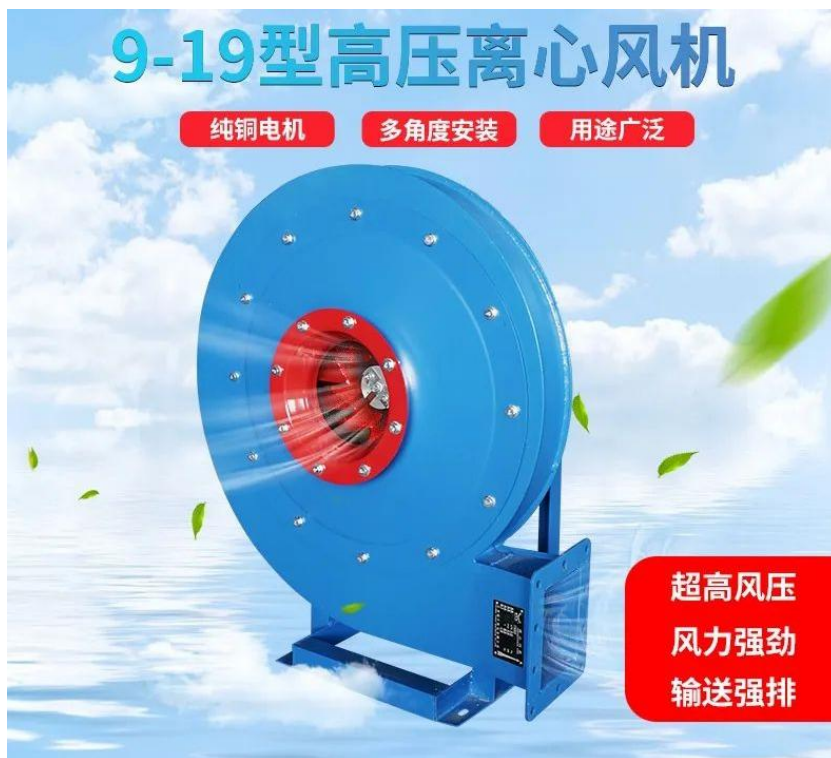




1

配用节能高效电机

高效、节能环保、使用寿命长
电机采用优良材质，运行平稳



静音专用轴承
稳定运行，耐磨损



全部铜线
寿命高达5年以上



优良外壳
坚固、不生锈、耐高温

2 风冷耐高温设计

(需选配)

专利产品，首创铝连接座
(内设散热风叶)，阻断温度传递，
延长电机高温下使用寿命！



3 加厚外壳

风壳和风机支架采用加厚钢板材料，
强度好，美观大方。
后经喷塑处理，耐腐蚀防生锈，
耐高温，抗震防摔。
风壳的出风口角度任意方向可调。

4 叶轮

后倾式叶轮，加厚叶片，强度高，风量大、噪音低、振动小。动平衡校正，运行平稳，寿命长。叶轮可制作成左旋、右旋，方便客户位置安装。




5 进风口（导流器） 进风口多种对接方式

可选直口和法兰对接。方便用户使用优化后的导流器，高效进风。减少风叶间隙，降低噪音，增加效率。

6 产品包装

采用蛇皮袋包装(后罩泡沫防护)，防止运输损坏。

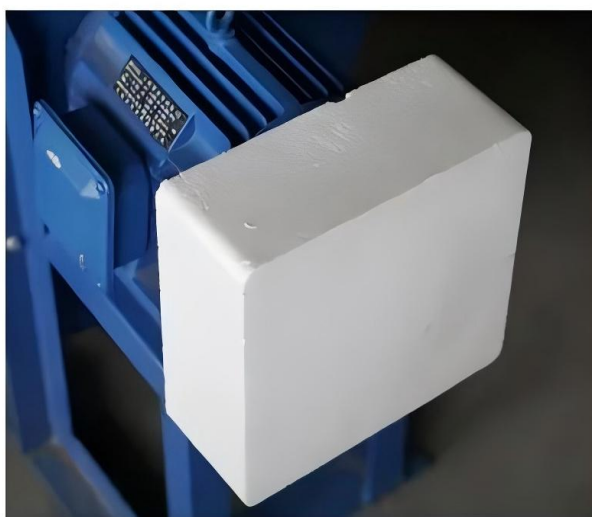



耐高温型

出厂形式：右旋0度(如图)

9-19

高压离心风机

High pressure centrifugal fan


产品简介 Product Brief

- 压力大、振动小。激光切割下料,大大提高产品精度,造型美观大方。
- 电机采用YE系列高效节能电机,高效率、低能耗、质量好、寿命长。
- 广泛应用于输送物料、空气及无腐蚀性不自燃、不含粘性物质的气体。
- 特别适用于一般锻炼、玻璃、陶瓷、无线电、电镀、蓄电池等行业的高压强制通风和粮食、饲料、矿粉、塑料、化工、锅炉行业的物料输送。
- 可选配耐高温型加长轴电机,耐高温200℃。
- High pressure and low vibration. Laser cutting blanking greatly improves the accuracy of the product, and the shape is beautiful and generous.
- YE series of high-efficiency and energy-saving motors are used in the motor, with high efficiency, low energy consumption, good quality and long service life.
- Widely used for conveying materials, air and non-corrosive, non-spontaneous combustion, non-viscous gases.
- Especially suitable for high-pressure forced ventilation in general exercise, glass, ceramics, radio, electroplating, batteries and other industries, as well as grain, feed, etc. Material conveying in mineral powder, plastics, chemical industry and boiler industry.
- Optional high temperature resistant extended shaft motor, high temperature resistant 200℃.

主要参数 Main parameter

型号 Model	功率 Power kw	转速 Speed r/min	电压 Voltage V	频率 Frequency Hz	流量 Flow m³/h	全压 Total Head Pa
9-19 3.15A	0.75KW-2	2830	380	50	402-545	2223-2262
	1.1KW-2	2830	380	50	617-832	2231-2017
9-19 3.55A	1.5KW-2	2840	380	50	560-760	2545-2590
	2.2KW-2	2840	380	50	860-1160	2554-2310
9-19 4A	2.2KW-2	2840	380	50	824-1264	3584-3597
	3KW-2	2870	380	50	1410-1704	3507-3253
9-19 4.5A	4KW-2	2890	380	50	1174-2062	4603-4447
	5.5KW-2	2900	380	50	2281-2504	4297-4112
9-19 5A	7.5KW-2	2900	380	50	1610-2844	5697-5517
	11KW-2	2900	380	50	3166-3488	5323-5080
9-19 5.6A	11KW-2	2900	380	50	2622-3619	7182-7109
	15KW-2	2900	380	50	3309-4260	7068-6755
9-19 6.3A	18.5KW-2	2900	380	50	3996-4901	6954-6400
	18.5KW-2	2900	380	50	3220-5153	9149-9055
	22KW-2	2900	380	50	4455-6066	9003-8601
	30KW-2	2900	380	50	5690-6978	8857-8148

| 安装尺寸 Installation dimension

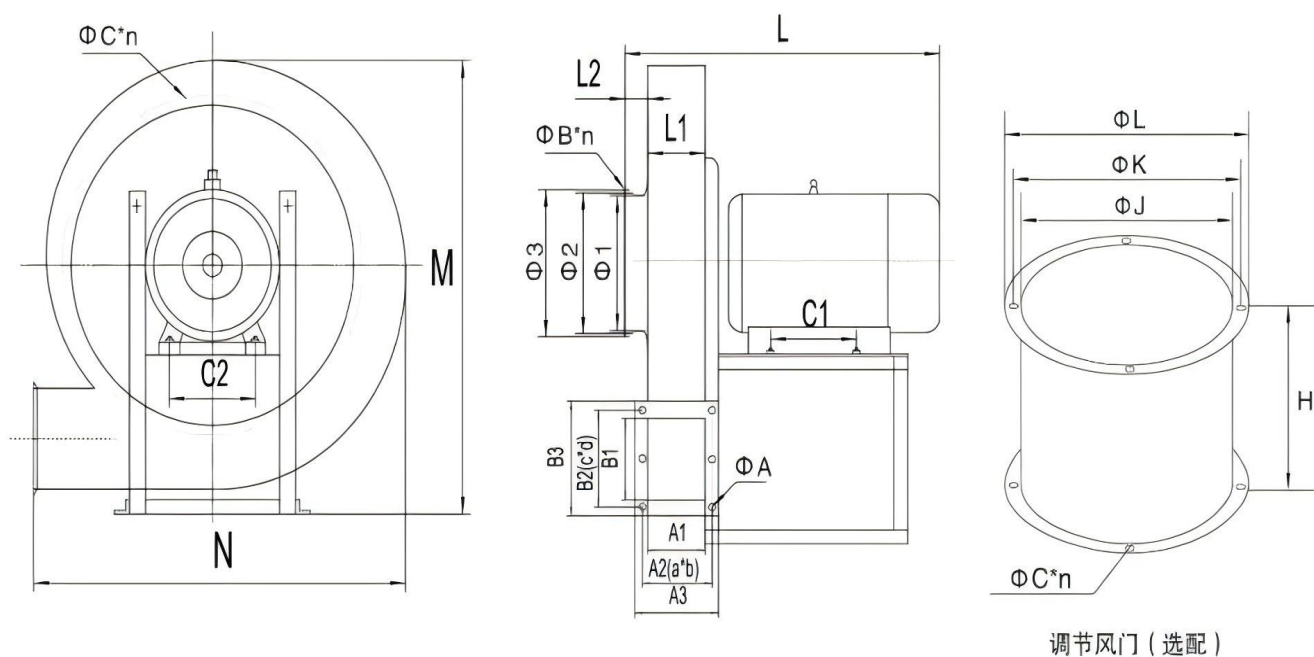

型号 Model	出风口法兰尺寸 Outlet flange size									进风法兰尺寸 Inlet flange dimensions			
	A1	A2	A3	a*b	B1	B2	B3	c*d	ΦA	$\Phi 1$	$\Phi 2$	$\Phi 3$	ΦB^*n
9-19 3.15A	90	124	155	62*2	102	138	167	69*2	$\Phi 11$	145	180	203	$\Phi 8^*8$
9-19 3.55A	92	130	155	65*2	132	171	192	57*3	$\Phi 11$	160	197	215	$\Phi 8^*8$
9-19 4A	107	140	170	70*2	136	174	200	57*3	$\Phi 11$	180	211	235	$\Phi 8^*8$
9-19 4.5A	105	140	168	70*2	150	182	212	60*3	$\Phi 11$	200	230	253	$\Phi 8^*8$
9-19 5A	125	164	192	82*2	168	204	232	68*3	$\Phi 11$	220	258	285	$\Phi 8^*8$
9-19 5.6A	163	193	223	65*3	193	226	257	75*3	$\Phi 11$	250	285	305	$\Phi 8^*8$
9-19 6.3A	165	198	226	97*2	205	242	270	80*3	$\Phi 11$	280	326	350	$\Phi 8^*8$

型号 Model	外形尺寸 Outline size						调节风门尺寸(选配) Size of regulating damper (optional)				
	L	L1	L2	M	N	ΦC^*n	ΦJ	ΦK	ΦL	ΦC^*n	H
9-19 3.15A	360	65	35	650	485	$\Phi 8^*12$	145	180	203	$\Phi 8^*8$	150
9-19 3.55A	430	70	40	700	530	$\Phi 8^*12$	160	197	215	$\Phi 8^*8$	160
9-19 4A	460	78	45	800	630	$\Phi 8^*12$	180	211	235	$\Phi 8^*8$	180
9-19 4.5A	590	85	50	850	720	$\Phi 8^*12$	200	230	253	$\Phi 8^*8$	190
9-19 5A	630	90	60	900	785	$\Phi 8^*12$	220	258	285	$\Phi 8^*8$	210
9-19 5.6A	685	100	75	985	850	$\Phi 8^*12$	250	285	305	$\Phi 8^*8$	220
9-19 6.3A	720	110	80	1110	960	$\Phi 8^*12$	280	326	350	$\Phi 8^*8$	230



出厂形式：右旋0度(如图)

9-26

高压离心风机

High pressure centrifugal fan

产品简介 Product Brief

- 压力大、振动小。激光切割下料,大大提高产品精度,造型美观大方。
- 电机采用YE系列高效节能电机,高效率、低能耗、质量好、寿命长。
- 广泛应用于输送物料、空气及无腐蚀性不自燃、不含粘性物质的气体。
- 特别适用于一般锻炼、玻璃、陶瓷、无线电、电镀、蓄电池等行业的高压强制通风和粮食、饲料、矿粉、塑料、化工、锅炉行业的物料输送。
- 可选配耐高温型加长轴电机,耐高温200℃。
- High pressure and low vibration. Laser cutting blanking greatly improves the accuracy of the product, and the shape is beautiful and generous.
- YE series of high-efficiency and energy-saving motors are used in the motor, with high efficiency, low energy consumption, good quality and long service life.
- Widely used for conveying materials, air and non-corrosive, non-spontaneous combustion, non-viscous gases.
- Especially suitable for high-pressure forced ventilation in general exercise, glass, ceramics, radio, electroplating, batteries and other industries, as well as grain, feed, etc. Material conveying in mineral powder, plastics, chemical industry and boiler industry.
- Optional high temperature resistant extended shaft motor, high temperature resistant 200℃.


主要参数 Main parameter

型号 Model	功率 Power kw	转速 Speed r/min	电压 Voltage V	频率 Frequency Hz	流量 Flow m³/h	全压 Total Head Pa
9-26 3.15A	1.5KW-2	2800	380	50	1073-1321	2388-2284
	2.2KW-2	2800	380	50	1405-1570	2236-2112
9-26 3.5A	2.2KW-2	2800	380	50	1472-1812	2949-2820
	3KW-2	2800	380	50	1927-2153	2761-3407
9-26 4A	5.5KW-2	2800	380	50	2198-3215	3852-3407
9-26 4.5A	7.5KW-2	2800	380	50	3130-3685	4910-4776
	11KW-2	2800	380	50	3963-4792	4661-4256
9-26 5A	15KW-2	2800	380	50	4293-6349	6035-5381
	18.5KW-2	2800	380	50	4293-6762	6035-5180
9-26 5.6A	22KW-2	2800	380	50	6032-7185	7610-7400
	30KW-2	2800	380	50	7766-9500	7218-6527

9-26D型高压离心风机

窑炉排烟 矿粉输送

Kiln smoke, mineral powder conveying

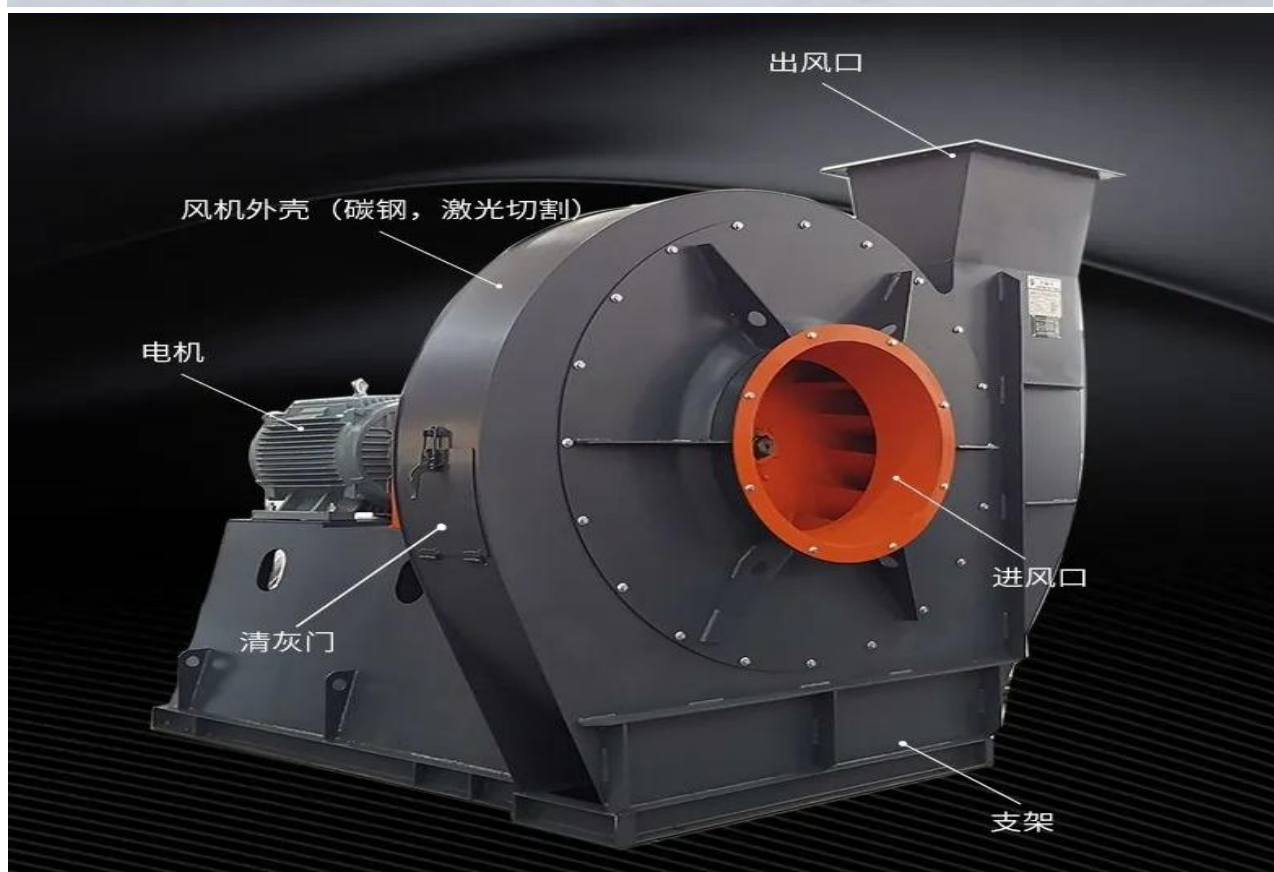

①

铜芯电机

采用铜芯电机，低噪音
工作运行稳定



②

进/出口顺畅

合理机身设计，让风机产生
更大压强吸力，安装空间小
使用美观方便



③

稳固底座

一体化底座，结构稳定
使电机高速运转时稳定工作



④



开清灰门


风壳上特开清灰门，方便及时
清理风壳内部及风叶上的灰尘
确保性能和效率



▼ 9-26D 型高压离心风机

机号 (No.)	型号	配用电机 (kW-P)	流量 (m ³ /h)	全压 (Pa)
7.1D	Y280S-2	75-2	12292-14634	12427-12078
	Y315S-2	110-2	15860-19360	11776-10635
8D	Y315M-2	132-2	17584-20947	15955-15504
	Y315L-2	200-2	22640-27696	15112-13634
	Y180M-4	18.5-4	8792-12166	3834-3529
	Y200L-4	30-4	13001-13848	3421-3294
9D	Y240L-4	30-4	12518-14913	4869-4736
	Y225M-4	45-4	16118-19717	4620-4181
10D	Y250M-4	55-4	17172-21465	6056-5920
	Y280S-4	75-4	23612-30052	5761-5065
11.2D	Y315S-4	110-4	24126-36189	7747-7009
	Y315M-4	132-4	39205-42210	6691-6382
	Y225M-6	30-6	15973-21963	3346-3140
	Y250M-6	37-6	23959-27935	3013-2763
12.5D	Y315L1-4	160-4	33540-41925	9713-9356
	Y280S-6	45-6	22206-27757	4179-4028
	Y315S-6	75-6	30533-38860	3921-3450

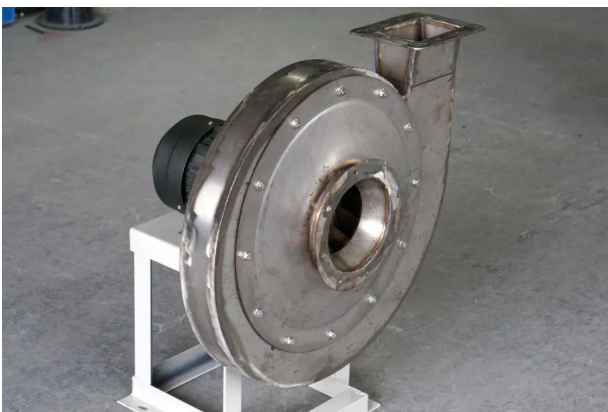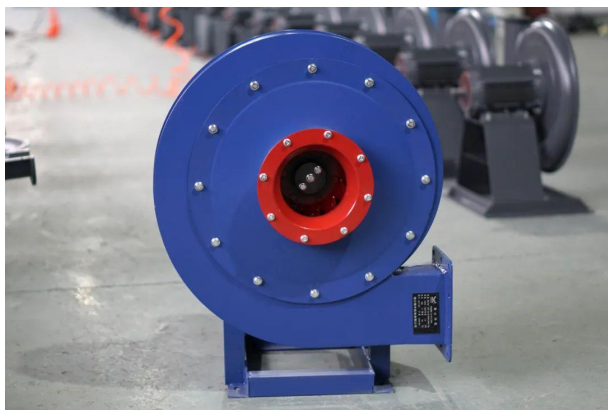

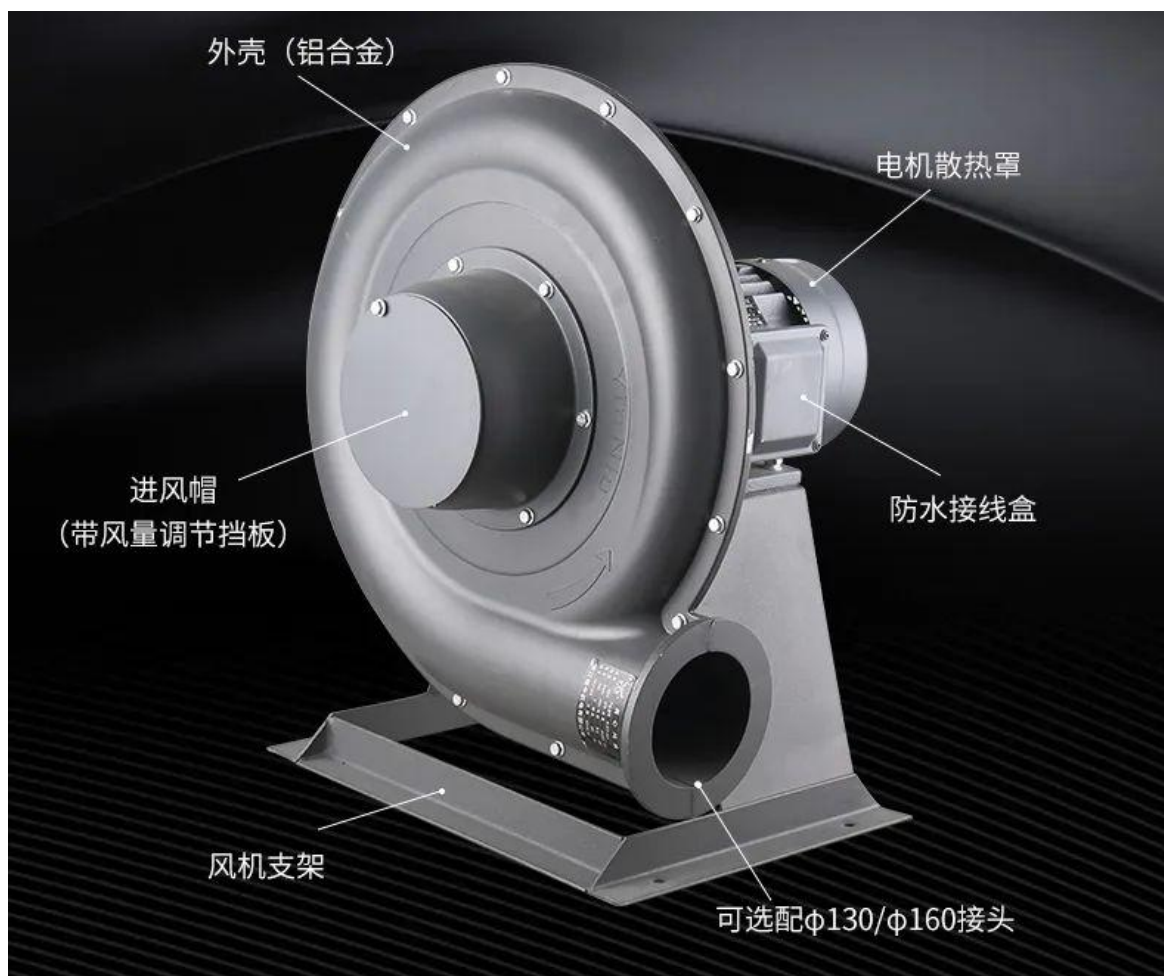


1

配用节能高效电机

高效、节能环保、使用寿命长
电机采用优良材质，运行平稳



静音专用轴承
稳定运行，耐磨损



全部铜线
寿命高达5年以上




优良外壳
坚固、不生锈、耐高温

2 铝合金压铸外壳

风壳采用铝合金压铸外壳，美观大方，防腐蚀，防生锈。
配备防爆电机，可做防爆风机使用



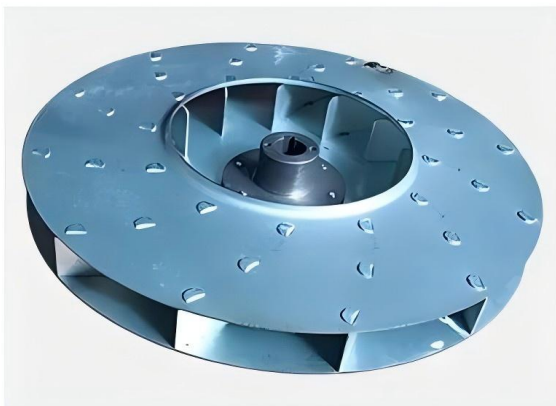

3 高效叶轮

国内首创，镀锌加厚叶轮，独特结构。

高强度、防腐蚀、不易粘油。

动平衡校正，运行平稳可靠。

风量大、噪音低、节能高效。

4 进风帽（调节阀）

风帽结构设计，有效降低噪音。标配风量调节挡板，满足各种风量需求。

高效进风，减少间隙，降低风量损失。



5 用户接口（选配）

多种对接方式，满足不同客户需求。

法兰对接：标配（用户自行钻孔）。

直口对接：可选配 $\phi 130$ 、 $\phi 160$ 的接头。

6 产品包装

采用蛇皮袋包装(后罩泡沫防护)，防止运输损坏。





5-34/27/32

离心式通风机 (铝风机)

Centrifugal fan (aluminium fan)

产品简介 Product Brief

- 塑机专用风机。广泛应用于塑料机械、印刷机械、吹膜机械、干燥机械等行业。
- 风量大、压力高、效率高、振动小、噪音低。
- 风机外壳为铝铸件，款式新颖，造型美观。配用防爆电机可作为防爆风机使用。
- 电机采用YE系列高效节能电机，高效率、低能耗、质量好、寿命长。




- Special fan for plastic plastics. It is widely used in plastic machinery, printing machinery, film blowing machinery, drying machinery and other industries.
- Large air volume, high pressure, high efficiency, low vibration and noise.
- The casing of the fan is made of aluminium casting, with novel style and beautiful appearance. The explosion-proof motor can be used as an explosion-proof fan.
- YE series of high-efficiency and energy-saving motors are used in the motor, with high efficiency, low energy consumption, good quality and long service life.

主要参数 Main parameter




型号 Model	功率 Power kw	电压 Voltage V	频率 Frequency Hz	转速 Speed r/min	流量 Flow m³/h	全压 Total Head Pa	噪音 Noise dB(A)	出厂角度 Factory angle
5-34-3A	0.75KW	380	50	2830	650	1420	70	90度，朝上
5-27-3.4A	1.1KW	380	50	2830	850	1550	74	90度，朝上
5-27-3.8A	1.5KW	380	50	2840	1050	1860	76	90度，朝上
5-27-4A	2.2KW	380	50	2840	1200	2250	76	90度，朝上
5-32-4.1A	3KW	380	50	2870	1670	2850	78	0度，水平
5-32-4.4A	4KW	380	50	2890	1850	2980	80	0度，水平
5-32-4.8A	5.5KW	380	50	2900	2250	3400	80	0度，水平
5-32-4.8A	7.5KW	380	50	2900	2700	3900	85	0度，水平
5-32-5A	7.5KW	380	50	2900	3670	5300	88	0度，水平
5-32-5A	11KW	380	50	2900	3340	4610	90	0度，水平
5-32-5A	15KW	380	50	2900	3360	4110	92	0度，水平


安装尺寸 Installation dimension

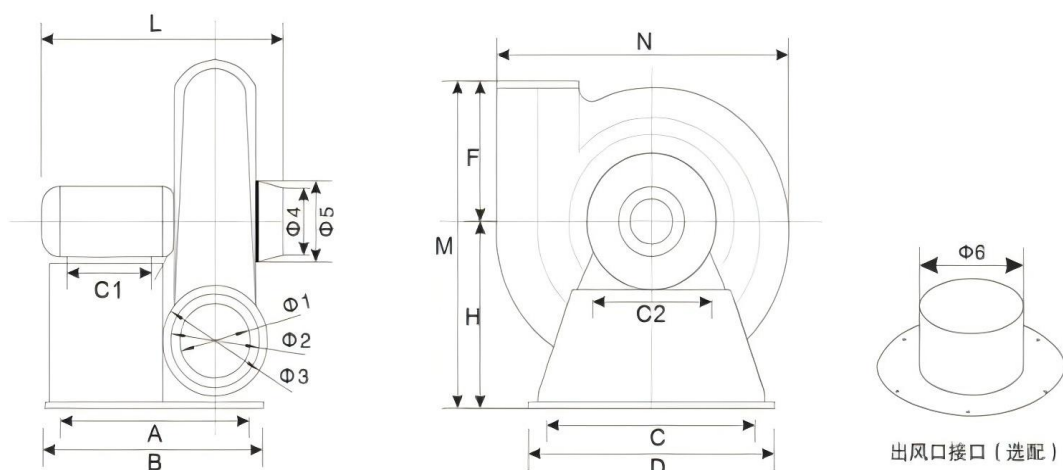

型号 Model	功率 Power	出风口法兰尺寸 Outlet flange size			进风口尺寸 Inlet flange dimensions		出风接口(选配) I/O (optional)
		$\Phi 1$	$\Phi 2(\Phi \times n)$	$\Phi 3$	$\Phi 4$ (内径)	$\Phi 5(\Phi \times n)$	
5-34-3A	0.75KW	100	133 (M8*6)	156	132	209 (M6*6)	100
5-27-3.4A	1.1KW	100	133 (M8*6)	156	132	209 (M6*6)	100
5-27-3.8A	1.5KW	122	160 (M8*6)	185	160	234 (M6*6)	125
5-27-4A	2.2KW	122	160 (M8*6)	185	160	234 (M6*6)	125
5-32-4.1A	3KW	150	190 (M8*4)	215	188	270 (M6*8)	130/160
5-32-4.4A	4KW	150	190 (M8*4)	215	188	270 (M6*8)	130/160
5-32-4.8A	5.5KW	150	190 (M8*4)	215	188	270 (M6*8)	130/160
	7.5KW	150	190 (M8*4)	215	188	270 (M6*8)	130/160
5-32-5A	7.5KW	175	210 (M8*6)	238	218	302 (M6*8)	180
	11KW	175	210 (M8*6)	238	218	302 (M6*8)	180
	15KW	175	210 (M8*6)	238	218	302 (M6*8)	180

型号 Model	功率 Power	外型尺寸 Outline size										
		A	B	C	D	L	M	N	F	H	C1	C2
5-34-3A	0.75KW	148	250	325	380	450	530	505	205	325	100	125
5-27-3.4A	1.1KW	148	250	325	380	450	530	505	205	325	100	125
5-27-3.8A	1.5KW	230	350	390	430	510	600	580	240	360	100	140
5-27-4A	2.2KW	230	350	390	430	510	600	580	240	360	125	160
5-32-4.1A	3KW	330	450	500	550	580	730	665	315	415	140	155
5-32-4.4A	4KW	330	450	500	550	635	730	665	325	425	140	190
5-32-4.8A	5.5KW	335	450	510	550	675	785	710	340	445	140	216
	7.5KW	335	450	525	550	675	785	710	340	445	140	216
5-32-5A	7.5KW	380	500	400	450	815	900	740	405	495	140	216
	11KW	380	500	400	450	850	900	740	405	495	210	254
	15KW	380	500	400	450	860	900	740	405	495	210	254

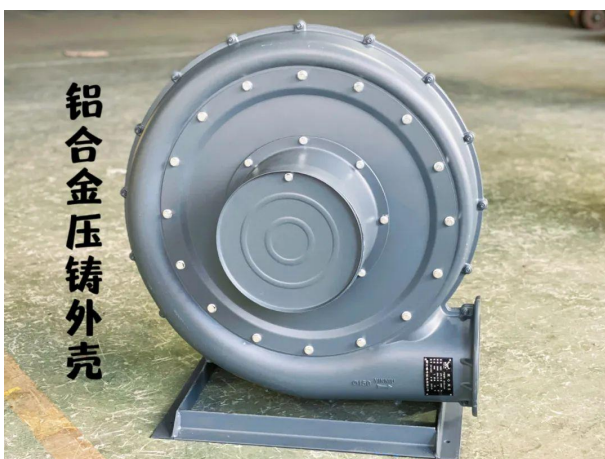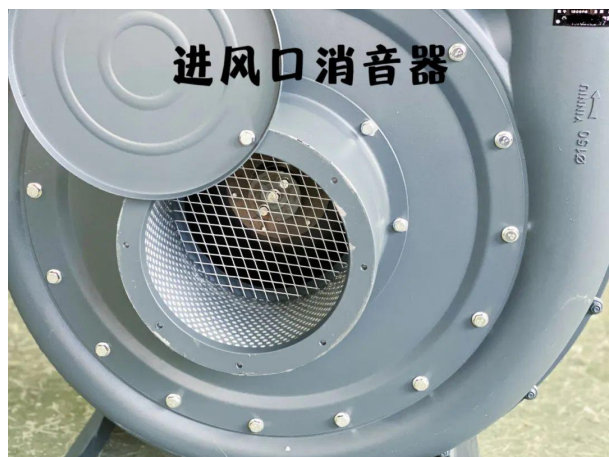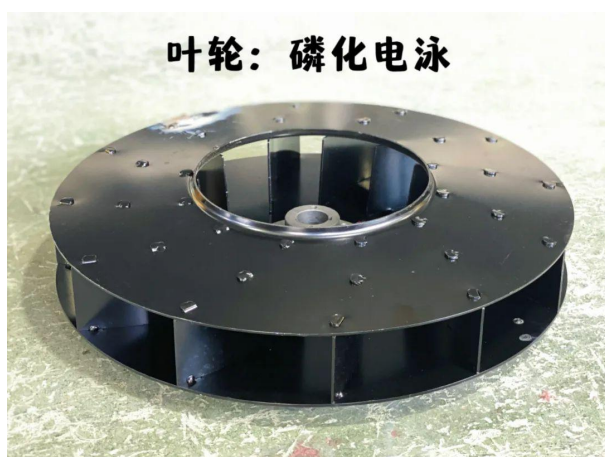

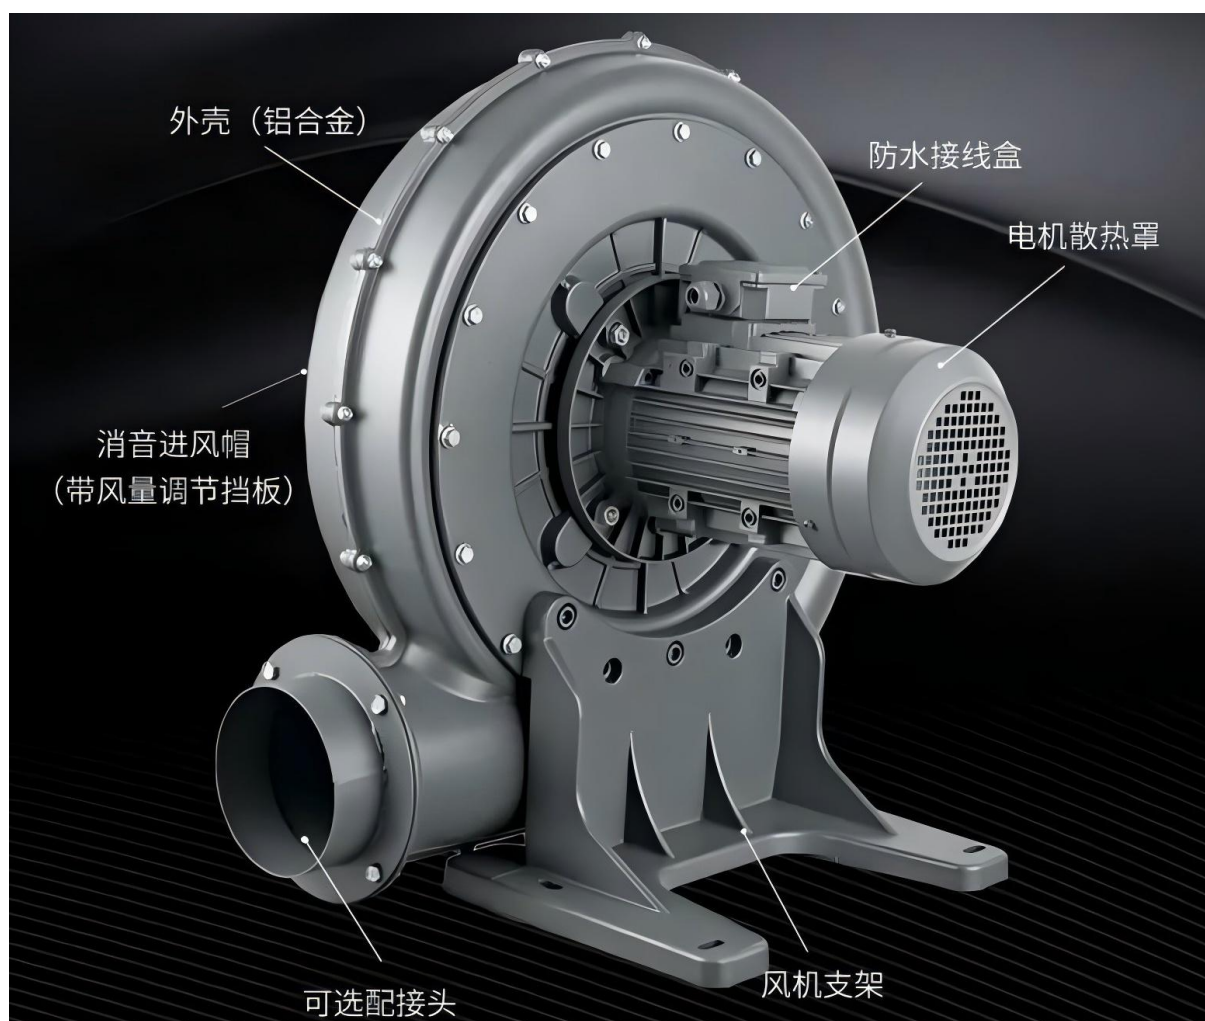




1

配用节能高效电机

高效、节能环保、使用寿命长
电机采用优良材质，运行平稳



静音专用轴承
稳定运行，耐磨损




全部铜线
寿命高达5年以上



优良外壳
坚固、不生锈、耐高温

2 铝合金压铸外壳

风壳采用铝合金压铸外壳，
观大方，防腐蚀，防生锈。
配备防爆电机，可做防爆
风机使用

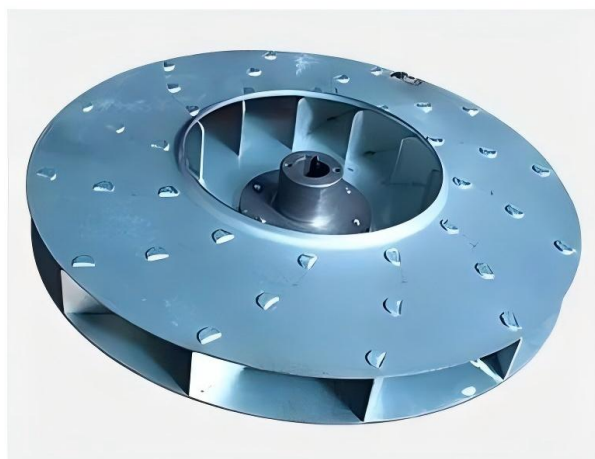

3 高效叶轮

国内首创，镀锌加厚叶轮，独特
结构。

高强度、防腐蚀、不易粘油。
动平衡校正，运行平稳可靠。
风量大、噪音低、节能高效。

4 进风帽（消音）

消音风帽结构设计，有效降低噪音。标配风量调节挡板，满足各种风量需求。高效进风，减少间隙，降低风量损失。




5 用户接口（选配）

多种对接方式，满足不同客户需求。
法兰对接：标配（用户自行钻孔）。
直口对接：可选配 $\phi 130$ 、 $\phi 160$ 的接头。

6 产品包装

采用蛇皮袋包装(后罩泡沫防护)，防止运输损坏。

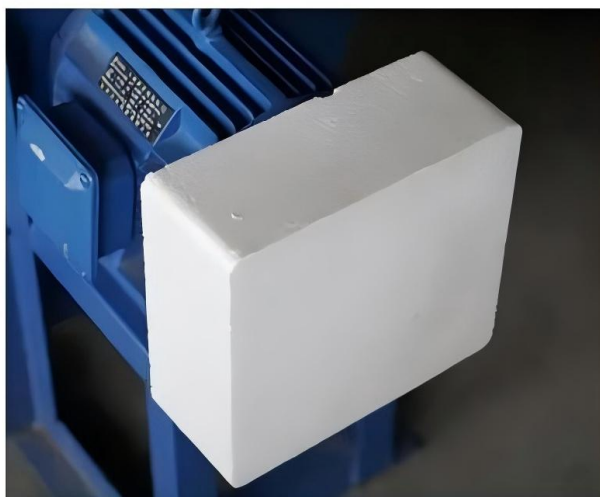

YN-TB

透浦式风机

Centrifugal fan (aluminium fan)



产品简介 Product Brief


- 铝合金压铸风壳，风壳支架一体压铸，轻量化、造型美观、安装方便。
- 高效离心式叶轮设计，风量大、压力高、振动小、噪音低。
- 广泛应用在印刷设备，清洗设备，灌装，饮料设备，橡塑设备，木工机械，造纸机械，包装机械，食品机械，燃烧炉，集尘机，焚化炉，机械冷却一般送风等各种行业。

- Aluminum alloy die cast wind casing, integrated with wind casing support, lightweight, aesthetically pleasing, and easy to install.
- Efficient centrifugal impeller design, with high air volume, high pressure, low vibration, and low noise.
- Widely used in various industries such as printing equipment, cleaning equipment, filling, beverage equipment, rubber and plastic equipment, woodworking machinery, papermaking machinery, packaging machinery, food machinery, combustion furnaces, dust collectors, incinerators, mechanical cooling and general air supply.

主要参数 Main parameter




型号 Model	功率 Power kw	电压 Voltage V	频率 Frequency Hz	转速 Speed r/min	流量 Flow m³/h	全压 Total Head Pa	噪音 Noise dB(A)
YN-TB-100	0.75KW	380	50	2830	650	1420	70
YN-TB-100	1.1KW	380	50	2830	850	1550	74
YN-TB-125	1.5KW	380	50	2840	1050	1860	76
YN-TB-125	2.2KW	380	50	2840	1200	2250	76
YN-TB-150	3KW	380	50	2870	1670	2850	78
YN-TB-150	4KW	380	50	2890	1850	2980	80
YN-TB-150	5.5KW	380	50	2900	2250	3400	80
YN-TB-150	7.5KW	380	50	2900	2700	3900	85
YN-TB-180	7.5KW	380	50	2900	3670	5300	88
YN-TB-180	11KW	380	50	2900	3340	4610	90
YN-TB-180	15KW	380	50	2900	3360	4110	92

| 安装尺寸 Installation dimension

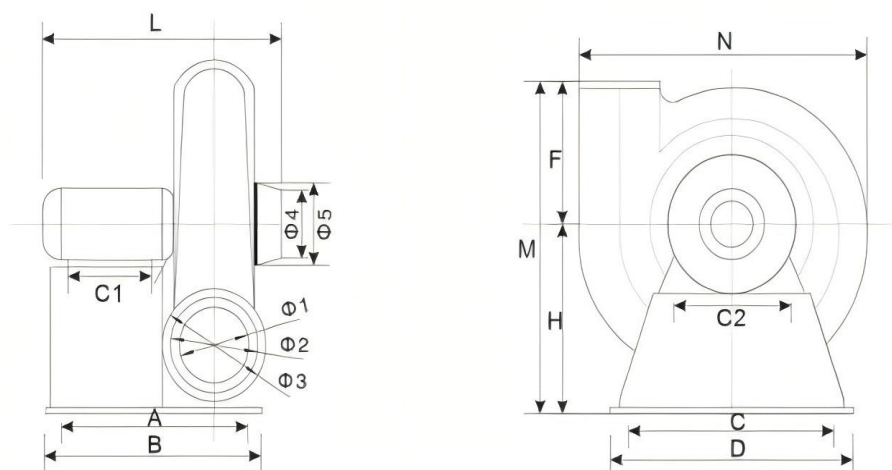

型号 Model	功率 Power	出风口法兰尺寸 Outlet flange size			进风口尺寸 Inlet flange dimensions	
		$\Phi 1$	$\Phi 2(\Phi \cdot n)$	$\Phi 3$	$\Phi 4$ (内径)	$\Phi 5(\Phi \cdot n)$
YN-TB-100	0.75KW	100	133 (M8*6)	156	132	209 (M6*6)
YN-TB-100	1.1KW	100	133 (M8*6)	156	132	209 (M6*6)
YN-TB-125	1.5KW	122	160 (M8*6)	185	160	234 (M6*6)
YN-TB-125	2.2KW	122	160 (M8*6)	185	160	234 (M6*6)
YN-TB-150	3KW	150	190 (M8*4)	215	188	270 (M6*8)
YN-TB-150	4KW	150	190 (M8*4)	215	188	270 (M6*8)
YN-TB-150	5.5KW	150	190 (M8*4)	215	188	270 (M6*8)
	7.5KW	150	190 (M8*4)	215	188	270 (M6*8)
YN-TB-180	7.5KW	175	210 (M8*6)	238	218	302 (M6*8)
	11KW	175	210 (M8*6)	238	218	302 (M6*8)
	15KW	175	210 (M8*6)	238	218	302 (M6*8)

型号 Model	功率 Power	外型尺寸 Outline size										
		A	B	C	D	L	M	N	F	H	C1	C2
YN-TB-100	0.75KW	148	250	325	380	450	530	505	205	325	100	125
YN-TB-100	1.1KW	148	250	325	380	450	530	505	205	325	100	125
YN-TB-125	1.5KW	230	350	390	430	510	600	580	240	360	100	140
YN-TB-125	2.2KW	230	350	390	430	510	600	580	240	360	125	160
YN-TB-150	3KW	330	450	500	550	580	730	665	315	415	140	155
YN-TB-150	4KW	330	450	500	550	635	730	665	325	425	140	190
YN-TB-150	5.5KW	335	450	510	550	675	785	710	340	445	140	216
	7.5KW	335	450	525	550	675	785	710	340	445	140	216
YN-TB-180	7.5KW	380	500	400	450	815	900	740	405	495	140	216
	11KW	380	500	400	450	850	900	740	405	495	210	254
	15KW	380	500	400	450	860	900	740	405	495	210	254

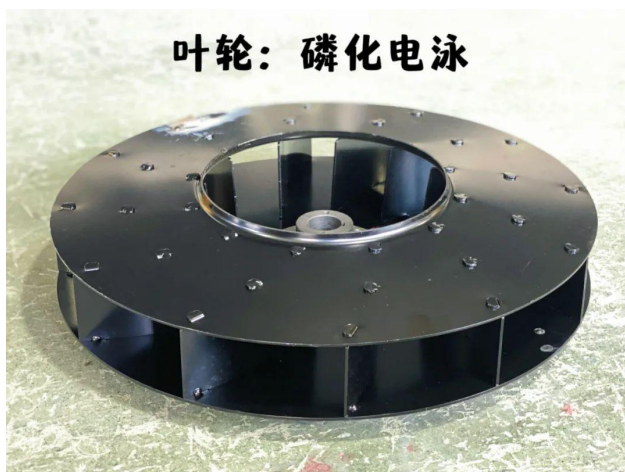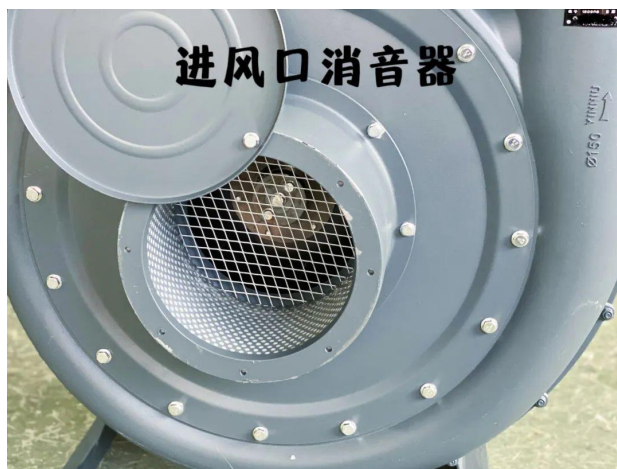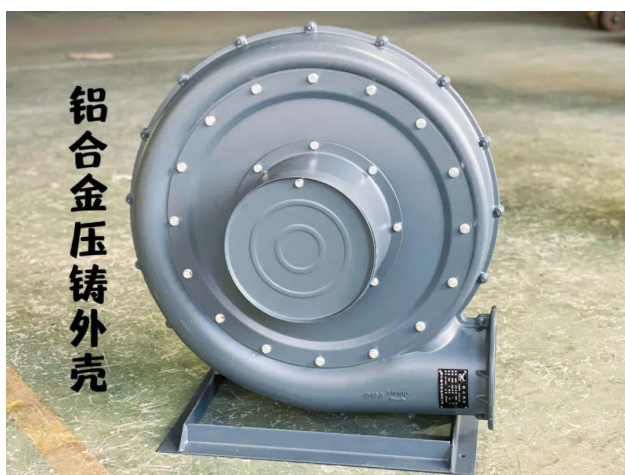

低噪声中压鼓风机

用于激光切割、雕刻机、打标机、木工集尘等




噪声低
LOW NOISE

风量大
WIND BIG

风压高
WIND HEIGHT

体积小
SMALL VOLUME

重量轻
LIGHT WEIGHT

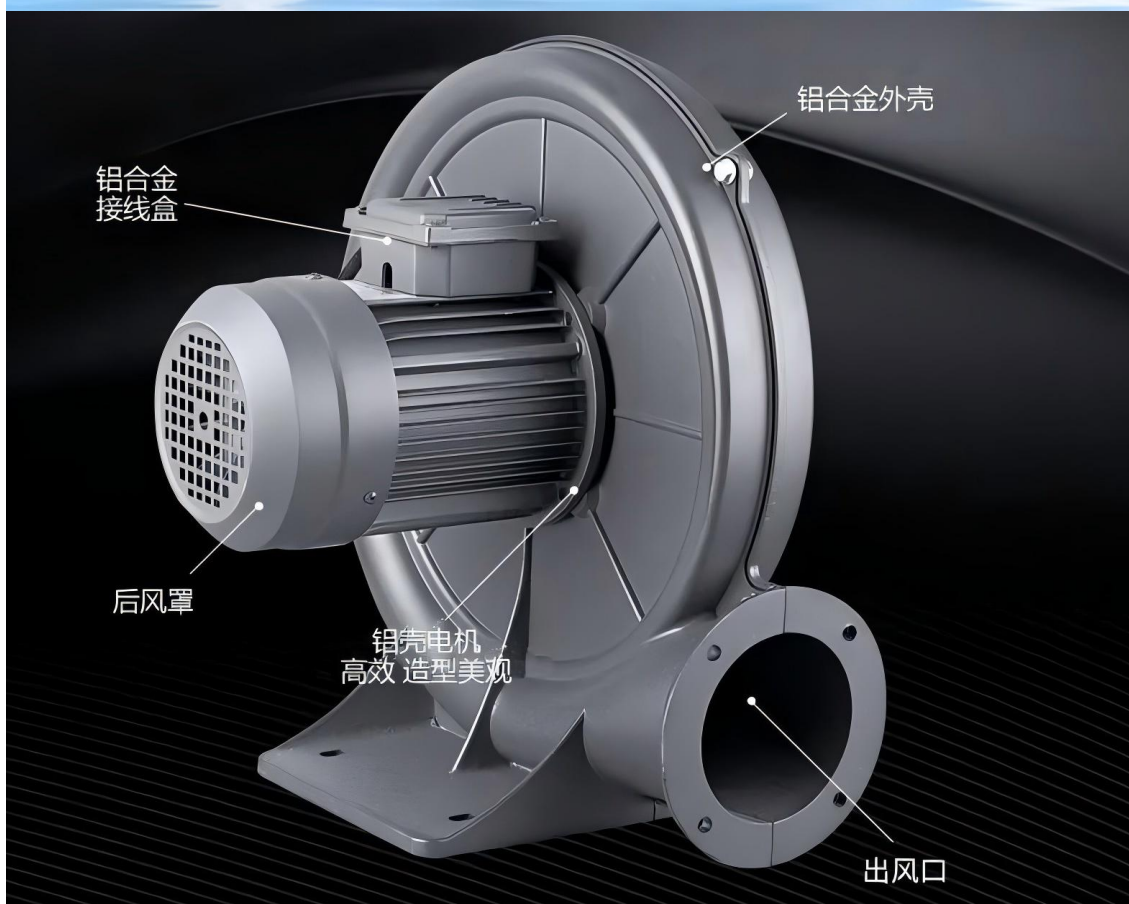



标准款
(无口带底脚)



出风口配法兰



不锈钢风壳

YNFL


风淋室风机、净化风机

Air shower room fan and purifying fan

产品简介 Product Brief

- 根据风淋行业使用要求，专业设计研发的风淋室专用风机。
- 噪音低、风量大、振动小、风压高，造型美观，安装容易。
- 选配不同风淋嘴，达到最佳使用效果。
- According to the requirements of the air shower industry, specially designed and developed special fan for the air shower room.
- Low noise, large air volume, small vibration, high wind pressure, beautiful appearance, easy installation.
- Select different air shower nozzles to achieve the best effect.

安装尺寸 Installation dimension

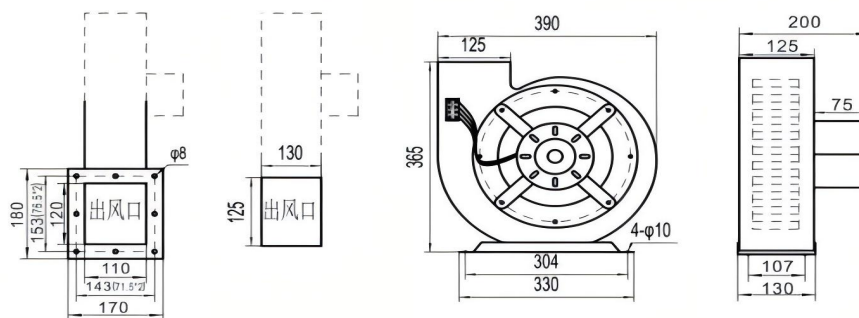

主要参数 Main parameter

型号 Model	功率 Power kw	转速 Speed r/min	电压 Voltage V	流量 Flow m³/h	全压 Total Head Pa	选配风淋嘴 Selection of air shower nozzle
YNFL-2.5	750W-2	2800	380	2600	1260	
YNFL-2.5-II	750W-2	2800	380	2400	1200	10-12
YNFL-2.3-II	650W-2	2800	380	2000	1120	8-10

产品型号：YNFL风淋室风机

电机转速：2800转/分钟


产品电压：380V

风机压力：中压风机

规格：标准款、配底脚
型号：YNFL-750W



安装尺寸 Installation dimension

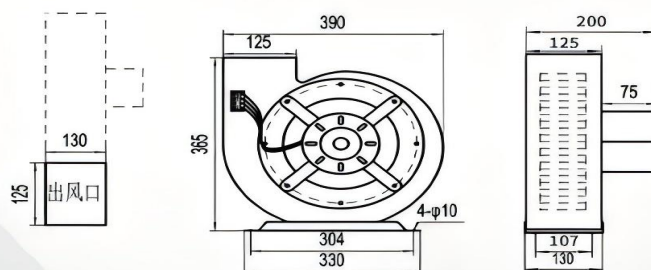


功率	转速 (r/min)	电压 (V)	流量 (m ³ /h)	全压 (Pa)	选配风淋嘴
750W	2800	380	2600	1260	10—12





规格：吹干机、配法兰
型号：YNFL-750W



安装尺寸 Installation dimension

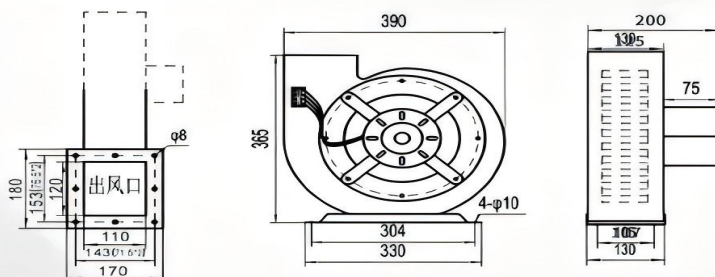

功率	转速 (r/min)	电压 (V)	流量 (m ³ /h)	全压 (Pa)	选配风淋嘴
750W	2800	380	2400	1200	

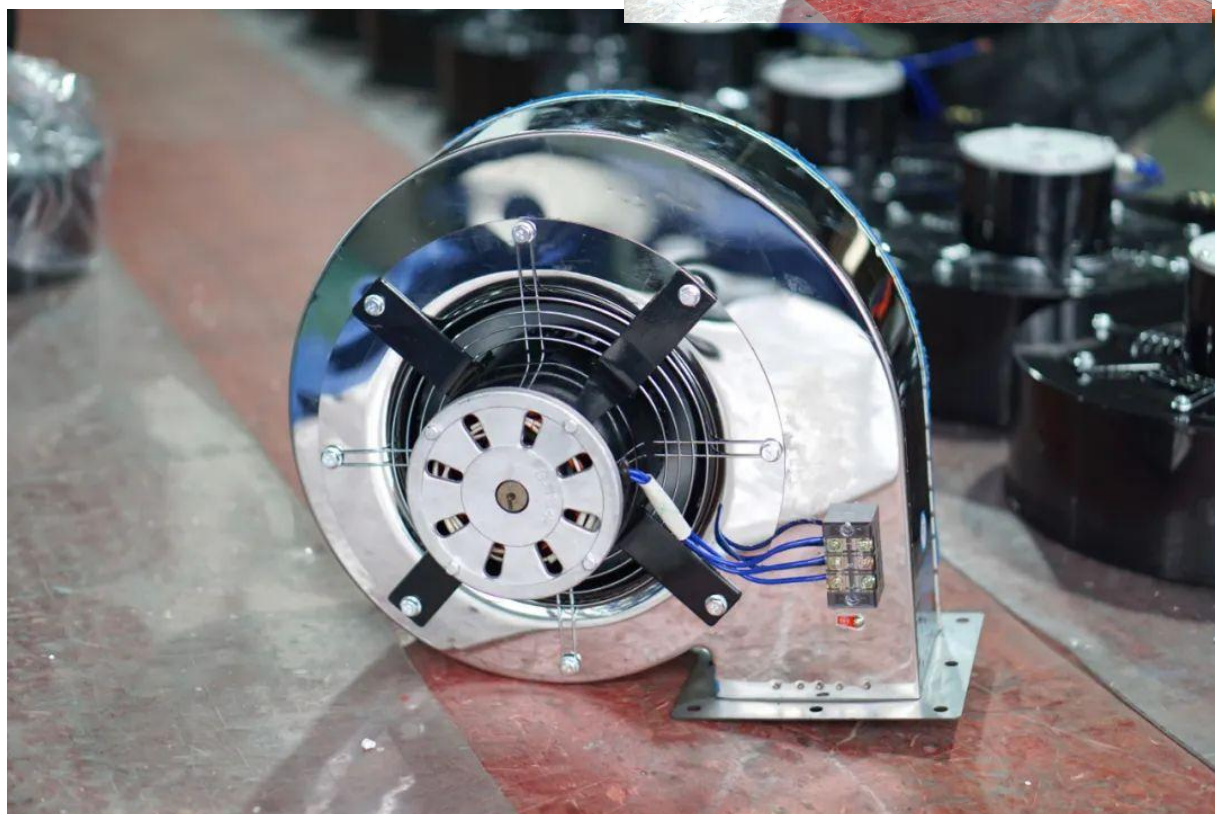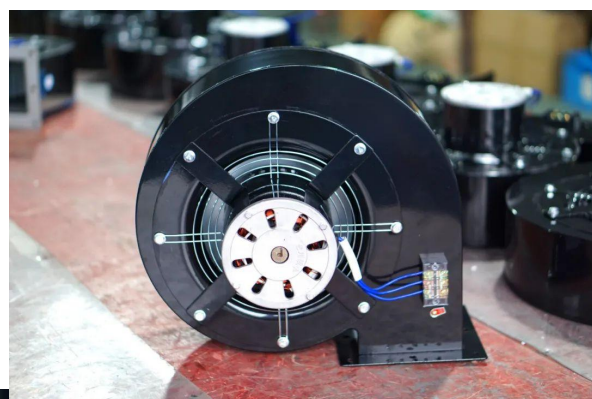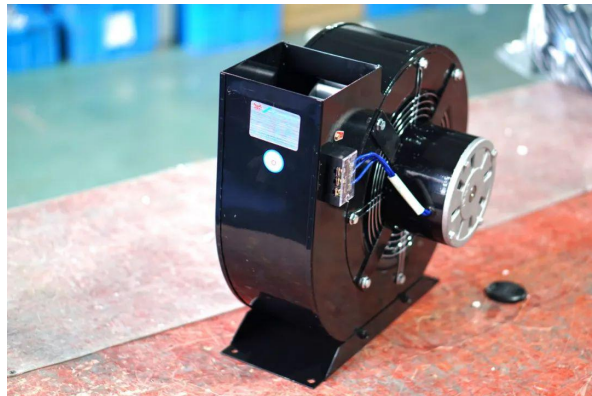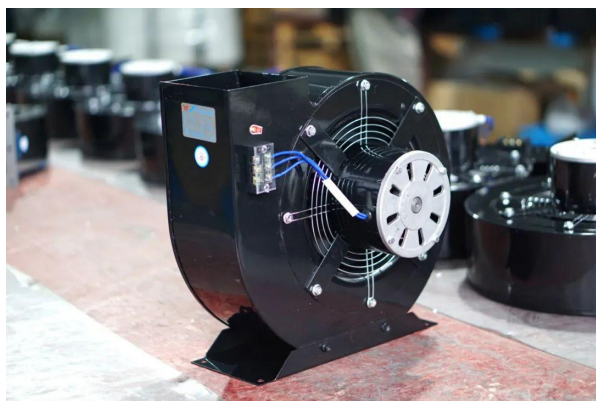



YNHY

焊烟除尘专用风机



Special fan for welding fume dedusting

产品简介 Product Brief

- 低噪音、大风量。银牛自主研发设计，为国内首创。
- 新款标配拉铆螺母（内嵌），方便用户对接，减少法兰成本。
- 在老款的基础上，采用新款增大风压和风量的叶轮设计。
- 并在风机进风侧采用一体成型，优化进风导流，增加强度。
- Low noise, high wind volume. Silver bull independent research and development design, for the first time in China.
- New standard rivet nuts (embedded) to facilitate user docking and reduce flange costs.
- On the basis of the old model, a new impeller design is adopted to increase the wind pressure and volume.
- And in the fan intake side of the integrated molding, optimize the intake diversion, increase strength.

主要参数 Main parameter

型号 Model	功率 Power kw	电压 Voltage V	频率 Frequency Hz	转速 Speed r/min	流量 Flow m³/h	全压 Total Head Pa	噪音 Noise dB(A)	安装孔距 Hole spacing (mm)
YNHY-2-Ⅲ	1.1KW	220/380	50	2800	1900-2400	1350-1240	82	205
YNHY-2.5-Ⅰ	1.5KW	220/380	50	2840	2500-3100	1510-1390	83	205
YNHY-2.5-Ⅱ	2.2KW	220/380	50	2840	3400-4100	1720-1580	84	205
YNHY-2.5-Ⅲ	3KW	220/380	50	2870	3800-4600	1900-1740	85	268
YNHY-2.8A	4KW	380	50	2890	4500-5400	2120-1830	90	315
YNHY-2.8A	5.5KW	380	50	2900	5000-6000	2360-2010	95	315



安装尺寸 Installation dimension

型号机号 Model	电机功率 Power	出风口尺寸 Outlet size		进风口尺寸 Inlet size			外形尺寸 Outline size						
		A1	B1	φ1	φ2	φa*n	C1	C2	M	N	L	C	
YNHY-2-Ⅲ	1.1KW	130	155	165	205	M8*6	100	125	387	335	245三 /245单	395三 /395单	
YNHY-2.5-Ⅰ	1.5KW	130	171	165	205	M8*6	125	140	435	385	270三 /270单	385三 /385单	
YNHY-2.5-Ⅱ	2.2KW	130	171	165	205	M8*6	125	140	435	385	296三 /298单	430三 /432单	
YNHY-2.5-Ⅲ	3KW	174	206	195	268	M8*6	140	160	445	400	330三 /340单	470三 /515单	
YNHY2.8A	4KW	155	250	260	315	M8*8	140	190	550	485	381	540	
YNHY2.8A	5.5KW	175	250	260	315	M8*8	140	216	550	485	441	618	

注：φ2为进风口的安装孔距（4KW、5.5KW无内嵌拉铆螺母）。

Note: φ2 is the installation hole distance of air intake (4KW, 5.5KW no embedded rivet nut is available).

产品名称：YNHY焊烟吸尘专用风机



产品电压：220V/380V

风机压力：中压风机

名称：焊烟除尘风机

型号：YNHY-2-III

安装尺寸 Installation dimension

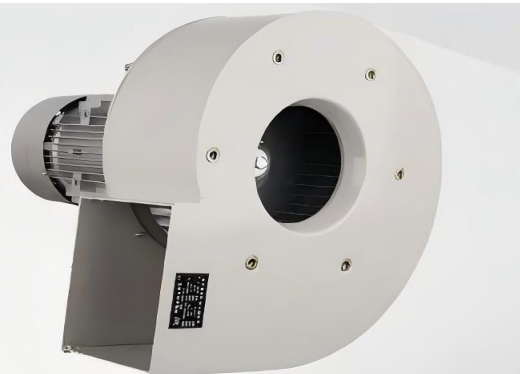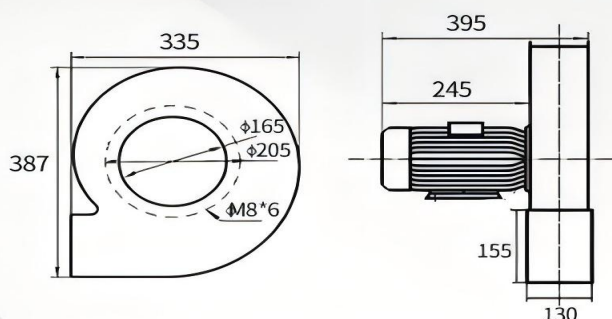


功率	电压 (V)	频率 (Hz)	转速 (r/min)	流量 (m³/h)	全压 (Pa)	噪音 (A)	孔距 (mm)
1.1KW	220/380	50	2800	1900-2400	1350-1240	82	205

名称：焊烟除尘风机

型号：YNHY-2.5- I

安装尺寸 Installation dimension


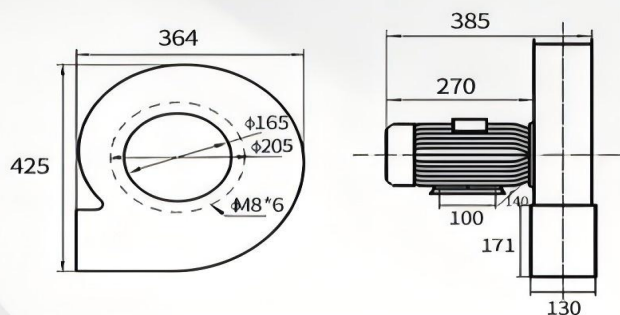


功率	电压 (V)	频率 (Hz)	转速 (r/min)	流量 (m³/h)	全压 (Pa)	噪音 (A)	孔距 (mm)
1.5KW	220/380	50	2840	2500-3100	1510-1390	83	205

名称：焊烟除尘风机

型号：YNHY-2.5- II

安装尺寸 Installation dimension

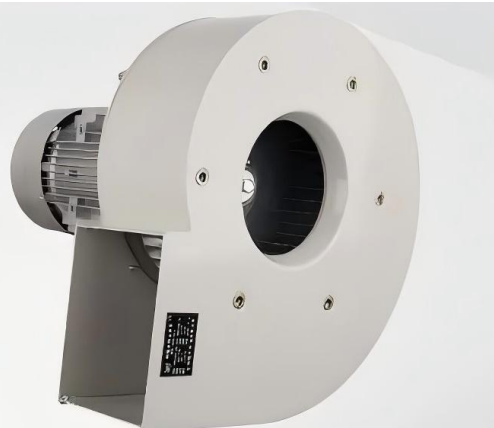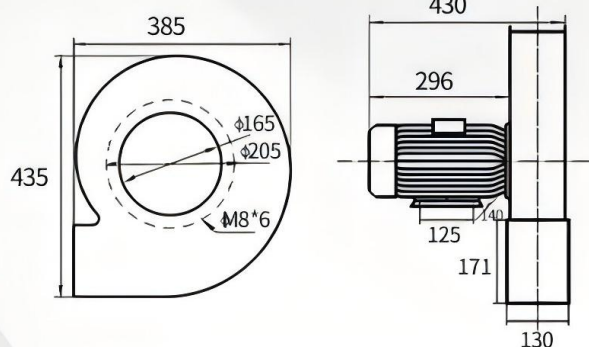


功率	电压 (V)	频率 (Hz)	转速 (r/min)	流量 (m ³ /h)	全压 (Pa)	噪音 (A)	孔距 (mm)
2.2KW	220/380	50	2840	3400-4100	1720-1580	84	205

名称：焊烟除尘风机

型号：YNHY-2.5- III

安装尺寸 Installation dimension


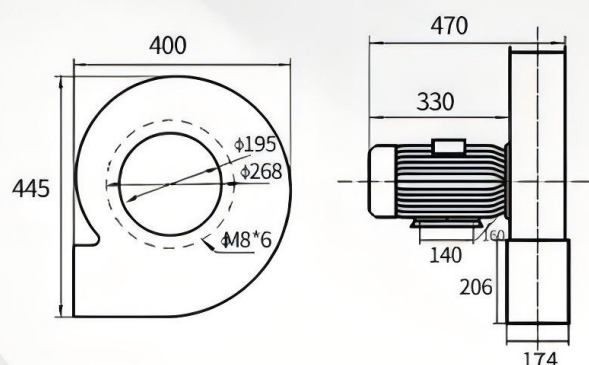


功率	电压 (V)	频率 (Hz)	转速 (r/min)	流量 (m ³ /h)	全压 (Pa)	噪音 (A)	孔距 (mm)
3KW	220/380	50	2870	3800-4600	1900-1740	85	268

名称：焊烟除尘风机

型号：YNHY-2.8A

安装尺寸 Installation dimension

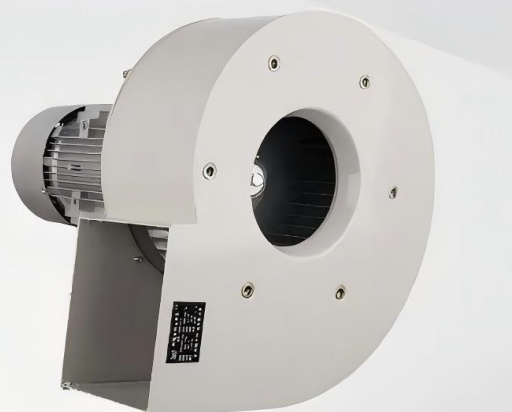
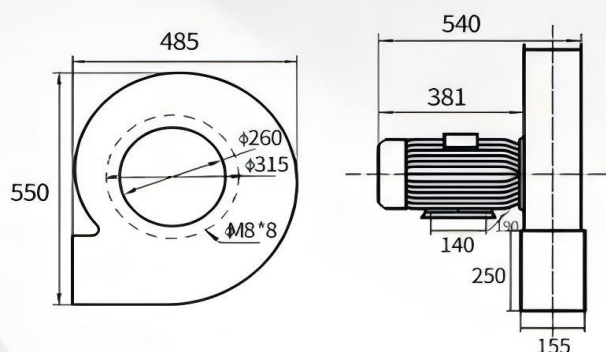


功率	电压 (V)	频率 (Hz)	转速 (r/min)	流量 (m³/h)	全压 (Pa)	噪音 (A)	孔距 (mm)
4KW	380	50	2890	4500-5400	2120-1830	90	315

名称：焊烟除尘风机

型号：YNHY-2.8A

安装尺寸 Installation dimension

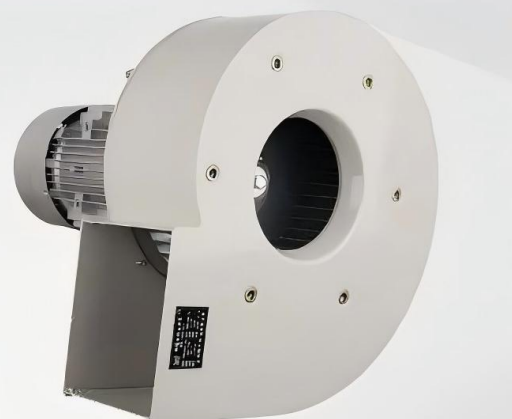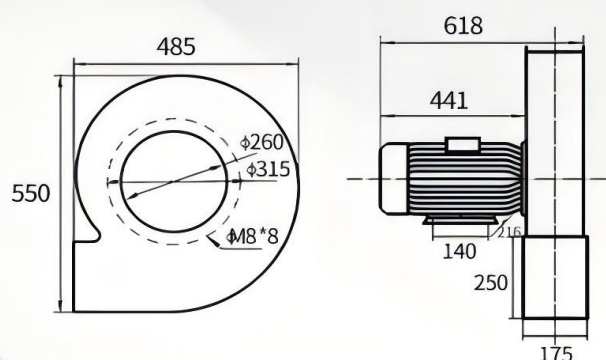

功率	电压 (V)	频率 (Hz)	转速 (r/min)	流量 (m³/h)	全压 (Pa)	噪音 (A)	孔距 (mm)
5.5KW	380	50	2900	5000-6000	2360-2010	95	315



出厂形式：左旋0度(如图)

TZY

中压风机 (铁壳)


Medium Pressure Fan (Iron shell)

产品简介 Product Brief

- 中压风机采用冲压和铝合金压铸外壳和风叶，轻量化、款式新颖、造型美观、安装容易。
- 特殊叶片设计，风量大、压力高、振动小、噪音低。
- 广泛应用于工厂冶炼、柴油燃烧机、柴油汽化炉、配套厨房设备、充气加压设施。
- 特别适用于锅炉设备、塑料、化工、干燥、吹膜、印刷、纺织机械等行业的鼓风输送。
- Medium pressure fan adopts stamping and aluminium alloy die casting shell and blade, which is lightweight, novel in style, beautiful in appearance and easy to install.
- Special blade design, large air volume, high pressure, low vibration, low noise.
- Widely used in factory smelting, diesel burner, diesel vaporization furnace, kitchen equipment, inflatable pressure facilities.
- It is especially suitable for blast conveying in boiler equipment, plastics, chemical industry, drying, film blowing, printing, textile machinery and other industries.

主要参数及尺寸图 Main parameters and dimensions

型号 Model	功率 Power kw	电压 Voltage V	频率 Frequency Hz	流量 Flow m³/h	全压 Total Head Pa	转速 Speed r/min	口径 Caliber mm
TZY-6367	250W	220	50	720	1300	2800	63
TZY-6368	370W	220	50	780	1400	2800	63
TZY-7666	550W	220/380	50	900	1700	2800	76
TZY-7667	750W	220/380	50	1020	1900	2800	76
TZY-9666	1100W	220/380	50	1260	2300	2800	96

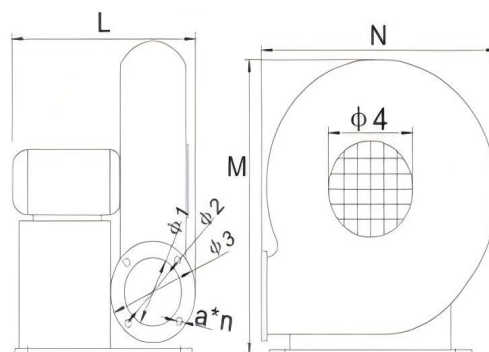

安装尺寸 Installation dimension

型号 Model	功率 Power	外形尺寸 Outline size							
		M	N	L	φ1	φ2	φ3	φ4	a*η
TZY-6367	250W	380	350	210	65	95	115	110	4*10
TZY-6368	370W	380	350	360	65	95	115	110	4*10
TZY-7666	550W	440	420	230	70	100	125	120	4*10
TZY-7667	750W	450	410	320	70	100	125	120	4*10
TZY-9666	1100W	490	440	340	85	130	150	175	4*10

注：如需更大功率，请选择5-27/5-32系列中高压铝风机。

Note: For more power, please select 5-27/5-32 series medium and high pressure aluminium blower.




产品名称：中压风机（铁壳）

产品电压：220V/380V

风机压力：中压风机

名称：中压风机
型号：ZYFJ-250W




安装尺寸 Installation dimension

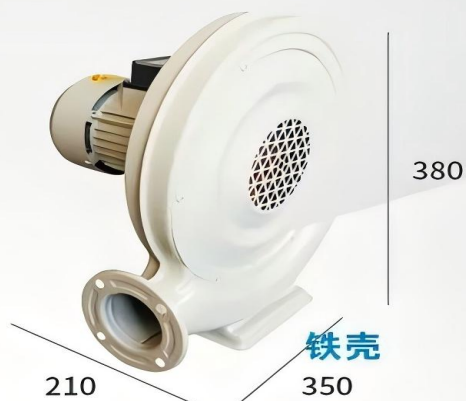

功率	电压 (V)	频率 (Hz)	流量 (m ³ /h)	全压 (Pa)	转速 (r/min)	口径 (mm)
250W	220/380	50	720	1300	2800	63

名称：中压风机
型号：ZYFJ-370W

安装尺寸 Installation dimension

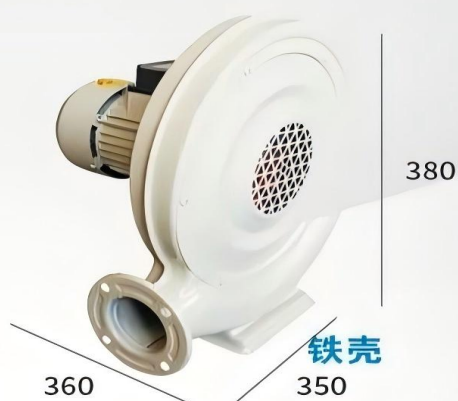



功率	电压 (V)	频率 (Hz)	流量 (m ³ /h)	全压 (Pa)	转速 (r/min)	口径 (mm)
370W	220/380	50	780	1400	2800	63

名称：中压风机

型号：ZYFJ-550W

安装尺寸 Installation dimension





功率	电压 (V)	频率 (Hz)	流量 (m ³ /h)	全压 (Pa)	转速 (r/min)	口径 (mm)
550W	220/380	50	900	1700	2800	76

名称：中压风机

型号：ZYFJ-750W

安装尺寸 Installation dimension





功率	电压 (V)	频率 (Hz)	流量 (m ³ /h)	全压 (Pa)	转速 (r/min)	口径 (mm)
750W	220/380	50	1020	1900	2800	76

名称：中压风机

型号：ZYFJ-1100W

安装尺寸 Installation dimension



功率	电压 (V)	频率 (Hz)	流量 (m³/h)	全压 (Pa)	转速 (r/min)	口径 (mm)
1100W	220/380	50	1260	2300	2800	96




产品名称：中压风机（铝壳）

产品电压：220V/380V


风机压力：中压风机

名称：中压风机
型号：ZYFJ-250W


安装尺寸 Installation dimension



出风口




进风口

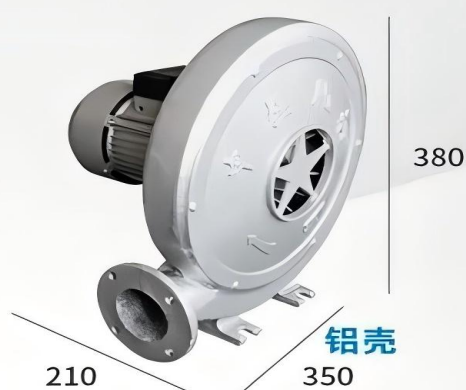


功率	电压 (V)	频率 (Hz)	流量 (m³/h)	全压 (Pa)	转速 (r/min)
250W	220/380	50	720	1300	2800

名称：中压风机
型号：ZYFJ-370W


安装尺寸 Installation dimension



出风口




进风口

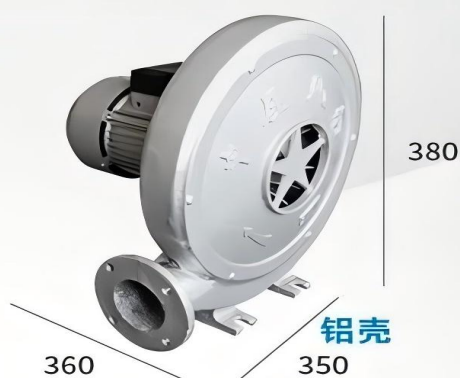


功率	电压 (V)	频率 (Hz)	流量 (m³/h)	全压 (Pa)	转速 (r/min)
370W	220/380	50	780	1400	2800

名称：中压风机
型号：ZYFJ-550W


安装尺寸 Installation dimension



出风口




进风口

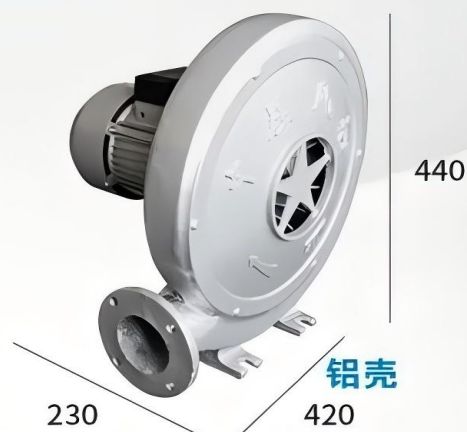


功率	电压 (V)	频率 (Hz)	流量 (m³/h)	全压 (Pa)	转速 (r/min)
550W	220/380	50	900	1700	2800

名称：中压风机
型号：ZYFJ-750W

安装尺寸 Installation dimension



出风口



进风口




功率	电压 (V)	频率 (Hz)	流量 (m³/h)	全压 (Pa)	转速 (r/min)
750W	220/380	50	1020	1900	2800


名称：中压风机

型号：ZYFJ-1100W


安装尺寸 Installation dimension



出风口




进风口

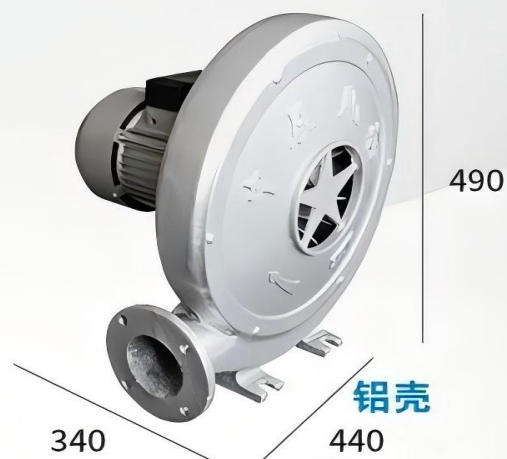


功率	电压 (V)	频率 (Hz)	流量 (m³/h)	全压 (Pa)	转速 (r/min)
1100W	220/380	50	1260	2300	2800

名称：中压风机


型号：ZYFJ-1500W



出风口




进风口

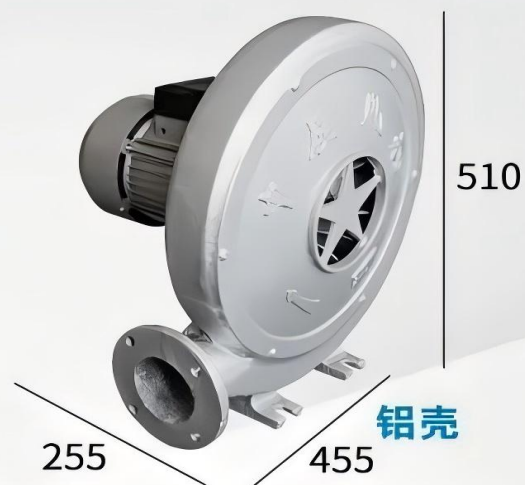


功率	电压 (V)	频率 (Hz)	流量 (m³/h)	全压 (Pa)	转速 (r/min)
1500W	220/380	50	2300	2400	2800

名称：中压风机


型号：ZYFJ-2200W



出风口



进风口

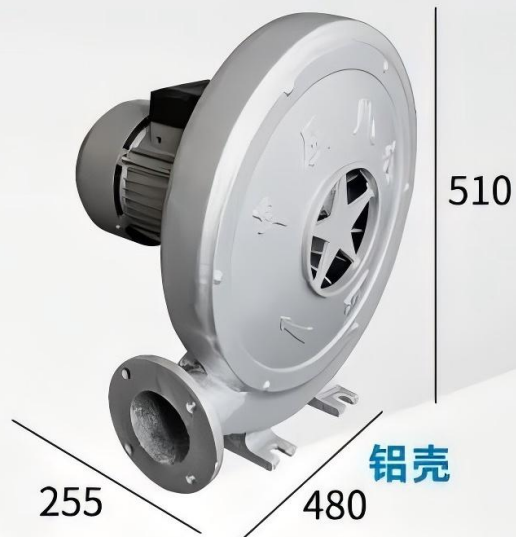

功率	电压 (V)	频率 (Hz)	流量 (m ³ /h)	全压 (Pa)	转速 (r/min)
2200W	220/380	50	2400	2500	2800



Hangzhou GT Rail Traffic Equipment Co., Ltd

Address: No.21 Jinfeng 3rd Road, Yipeng Street, Qiantang District, Hangzhou City, Zhejiang Province, China.

Web: www.ivhdrive.com <http://ivhdrive.en.alibaba.com>

Email: info@ivhdrive.com william@ivhdrive.com

Mob: +86 187 5820 4915

Professional Industry-Trade Integration.

Equipment And Integrated Solution Provider.

Integrity, Focus, Innovation.

