


# Hangzhou GT Rail Traffic Equipment Co., Ltd

**IVH Drive: Global Power Transmission Solutions**

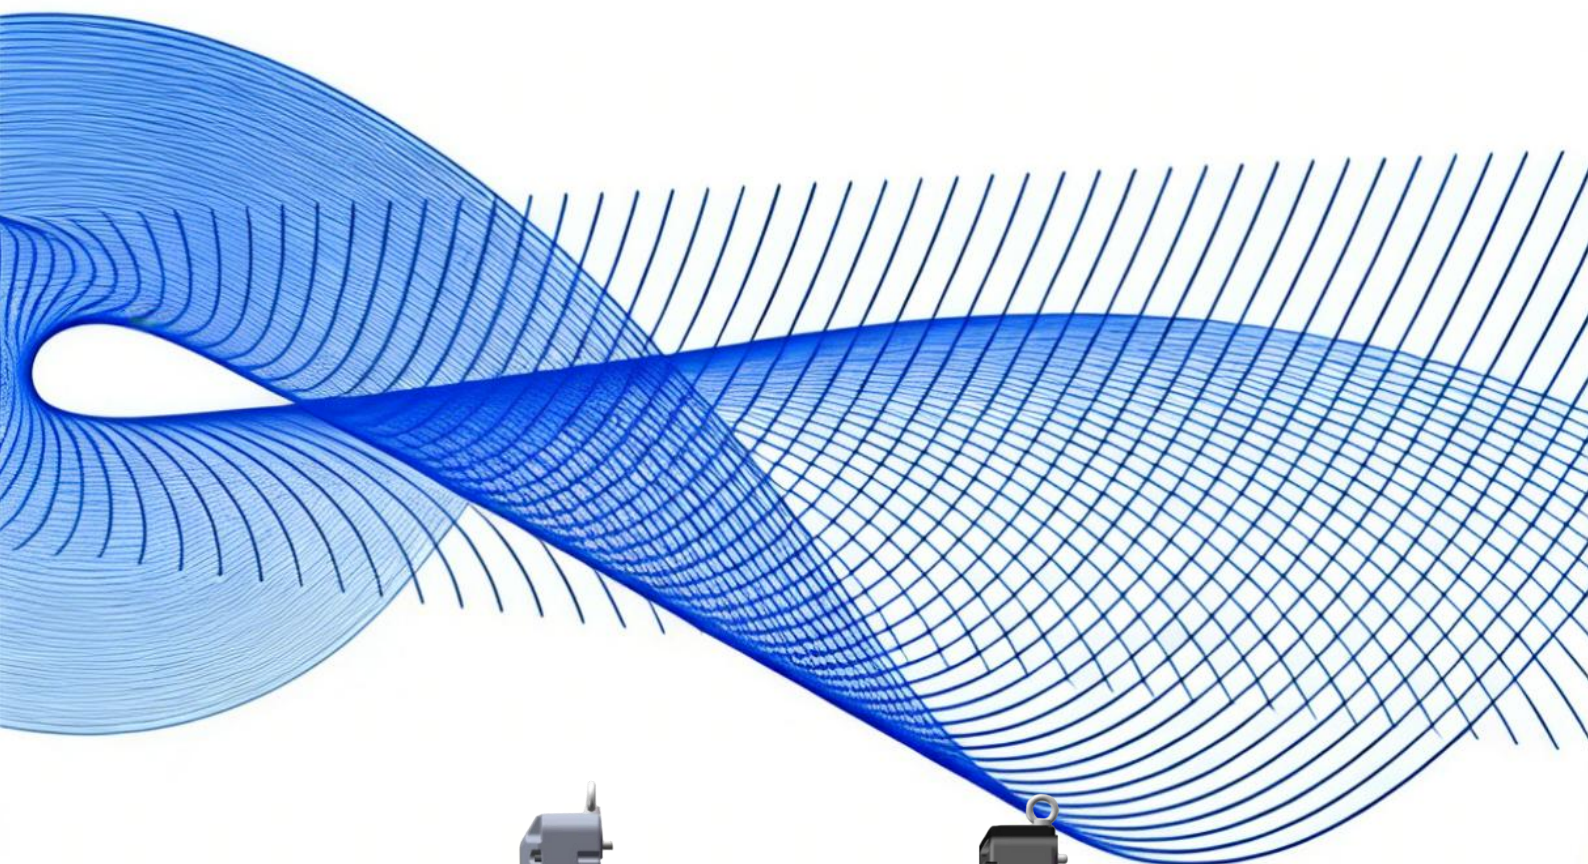

**Crane Reducer Catalogue**

## About Us

IVH DRIVE was founded in 2011 and headquartered in Hangzhou, is a National High-Tech Enterprise integrating R&D, manufacturing, and sales. With over 150 employees (15% in R&D) and a 32,000 m<sup>2</sup> smart production base, the company achieves an annual turnover of 150 million RMB (with 30% from exports), maintaining steady growth. Holding prestigious international certifications such as CE, UL, and CSA, IVH DRIVE is committed to providing domestic alternatives for high-end transmission equipment, delivering high-efficiency and high-stability power solutions for the global rail traffic and industrial sectors. Our products are widely utilized in diverse industries, including smart logistics, food packaging, energy & mining, and construction machinery. To date, we have exported to 25 countries, with a business footprint spanning Europe, North America, Southeast Asia, and the Middle East, making us your trusted partner for industrial power.

**2011**

SINCE

**25+**

EXPORT COUNTRIES

**40+**

PRODUCT COVERAGE

**8**

FACTORIES DISTRIBUTION






## Product Content

|                    |    |
|--------------------|----|
| 1.DTQ(S)3200.....  | 1  |
| 2.DTQ(S)5000.....  | 4  |
| 3.DTQ(S)10000..... | 7  |
| 4.DTQ(S)20000..... | 13 |
| 5.DTQ(S)25000..... | 16 |
| 6.DTQ(S)40000..... | 22 |

## DTQ(S) 3200 Electric Hoist (Dual Brake) Two-Speed Lifting Reducer

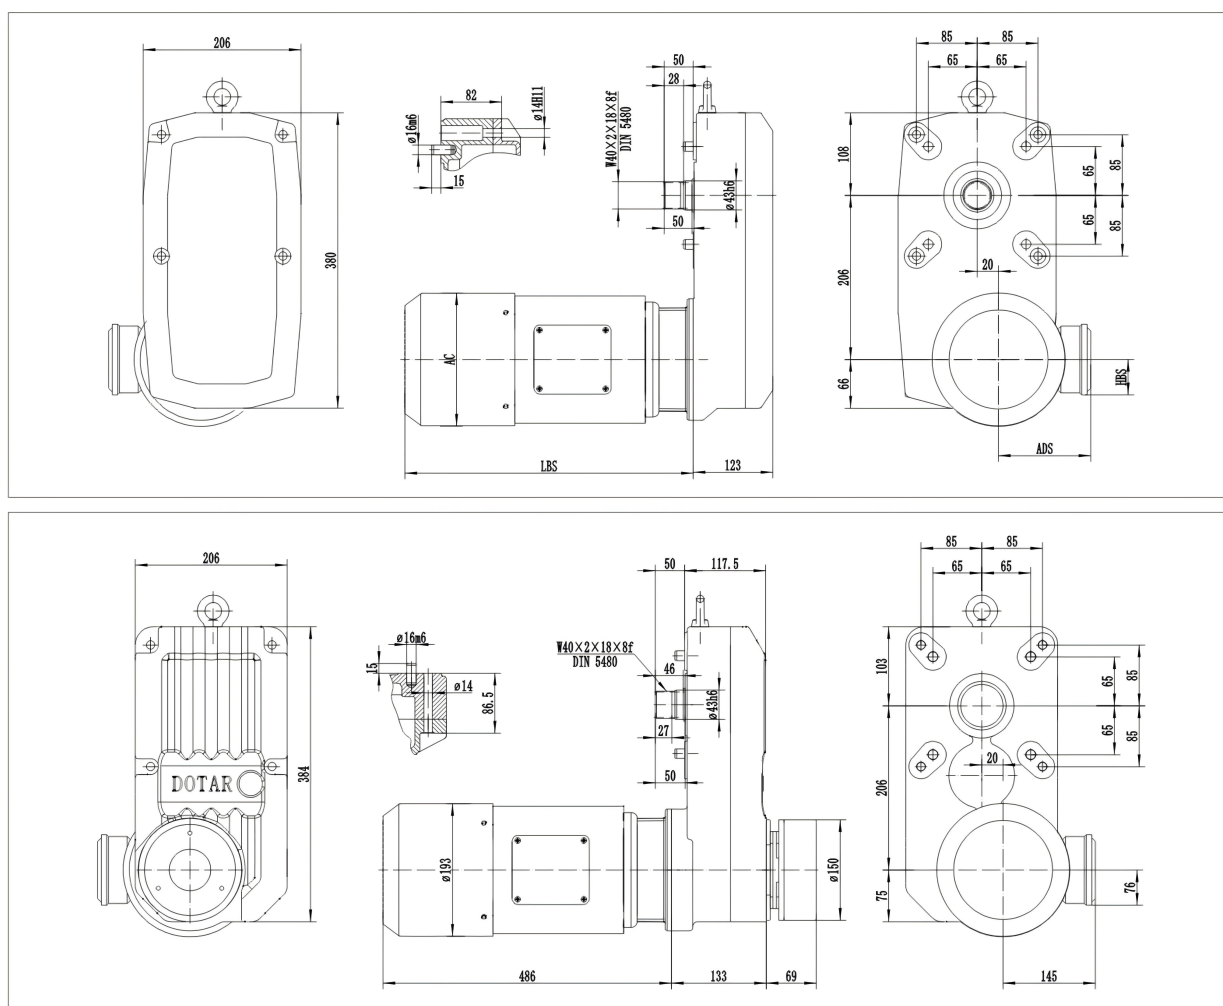


卷筒直径140mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW             | 频率Hz       | 减速比   | 扭矩<br>N.m | 型号                         | 电机<br>相关尺寸 |
|----|------|-----------------|-----------------------|------------------------|------------|-------|-----------|----------------------------|------------|
| 1  | 3.2  | M5/2m           | 0.66/4.0<br>(0.8/4.8) | 0.37/2.5<br>(0.44/3.0) | 50<br>(60) | 78.63 | 28        | DTQ(S)3200-78.63-YEJ100L   | AC: 195    |
|    | 2.5  | M6/3m           |                       |                        |            |       |           | -12/2-0.37/2.5kW-380V/50Hz | LBS: 372   |
|    | 2    | M7/4m           |                       |                        |            |       |           | DTQ(S)3200-78.63-YEJ100L   | ADS: 141   |
| 2  | 3.2  | M5/2m           | 0.8/5.0<br>(1.0/6.0)  | 0.45/3.2<br>(0.54/3.8) | 50<br>(60) | 62.59 | 28        | -12/2-0.44/3.0kW-380V/60Hz | HBS: 61.5  |
|    | 2.5  | M6/3m           |                       |                        |            |       |           | DTQ(S)3200-62.59-YEJ100L   | AC: 195    |
|    | 2    | M7/4m           |                       |                        |            |       |           | -12/2-0.45/3.2kW-380V/50Hz | LBS: 372   |
| 3  | 3.2  | M5/2m           | 1.0/6.3<br>(1.2/7.6)  | 0.6/4.0<br>(0.72/4.8)  | 50<br>(60) | 49.46 | 40        | DTQ(S)3200-62.59-YEJ100L   | ADS: 141   |
|    | 2.5  | M6/3m           |                       |                        |            |       |           | -12/2-0.54/3.8kW-380V/60Hz | HBS: 61.5  |
|    | 2    | M7/4m           |                       |                        |            |       |           | DTQ(S)3200-49.46-YEJ100L   | AC: 195    |
| 4  | 2.5  | M5/2m           | 1.3/8.0<br>(1.6/9.6)  | 0.6/4.0<br>(0.72/4.8)  | 50<br>(60) | 39.43 | 40        | -12/2-0.6/4.0kW-380V/50Hz  | LBS: 372   |
|    | 2    | M6/3m           |                       |                        |            |       |           | DTQ(S)3200-49.46-YEJ100L   | ADS: 141   |
|    | 1.6  | M7/4m           |                       |                        |            |       |           | -12/2-0.72/4.8kW-380V/60Hz | HBS: 61.5  |



## DTQ(S)3200 Electric Hoist (Dual Brake) Variable Frequency Lifting Reducer

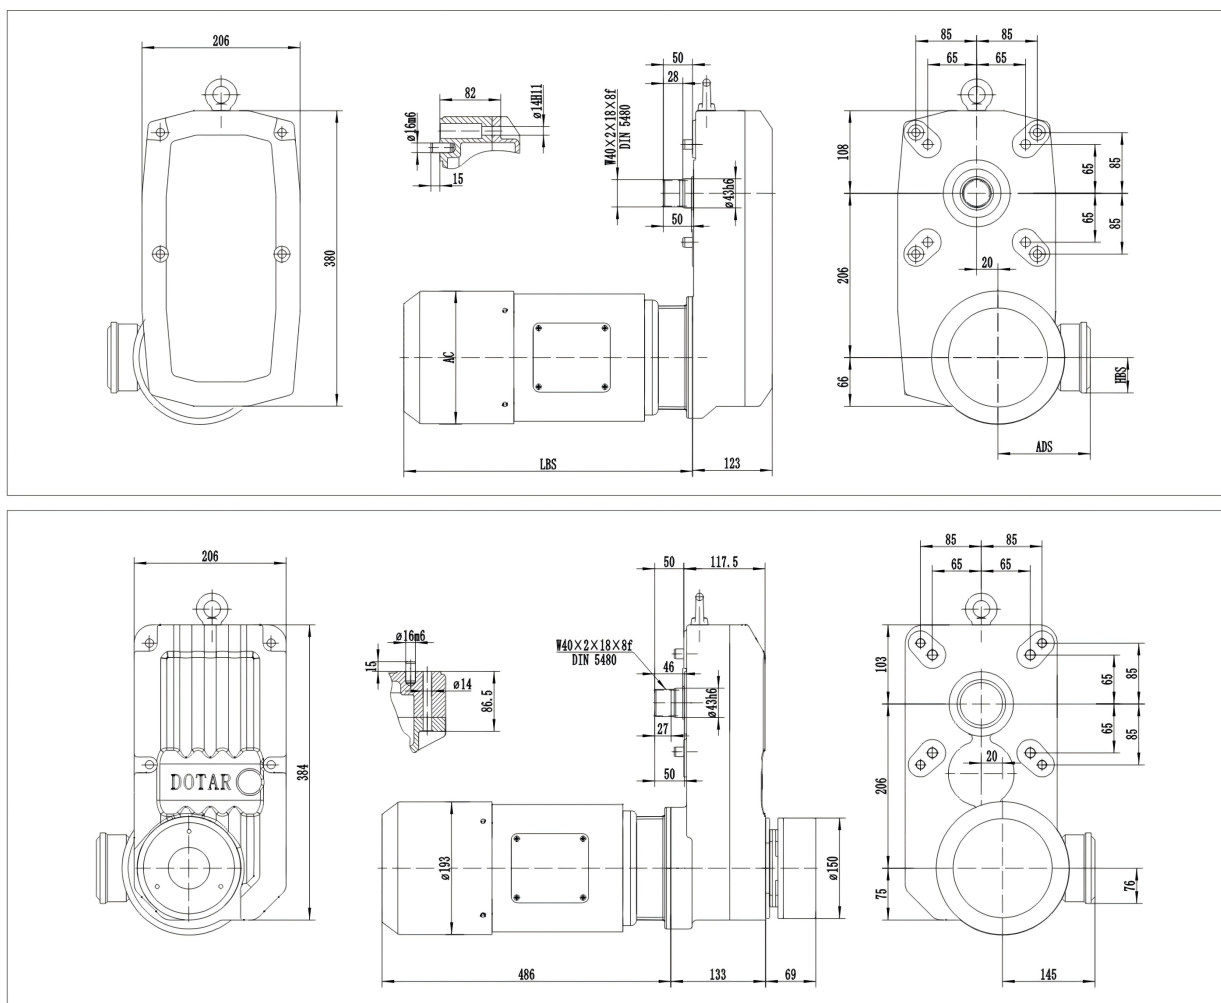


卷筒直径140mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW   | 频率Hz         | 减速比   | 扭矩<br>N.m | 型号                                                 | 电机<br>相关尺寸 |
|----|------|-----------------|-----------------------|--------------|--------------|-------|-----------|----------------------------------------------------|------------|
| 1  | 3.2  | M5/2m           | 0.66-4.0<br>(0.8-4.8) | 2.5<br>(3.0) | 100<br>(120) | 78.63 | 28        | DTQ(S)3200-78.63-YPEJ100L<br>-4-2.5kW-380V/100Hz   | AC: 195    |
|    | 2.5  | M6/3m           |                       |              |              |       |           | DTQ(S)3200-78.63-YPEJ100L<br>-4-3.0kW-380V/120Hz   | LBS: 372   |
|    | 2    | M7/4m           |                       |              |              |       |           |                                                    | ADS: 141   |
| 2  | 3.2  | M5/2m           | 0.8-5.0<br>(1.0-6.0)  | 3.2<br>(3.8) | 100<br>(120) | 62.59 | 28        | DTQ(S)3200-62.59-YPEJ100L<br>-4-3.2kW-380V/100Hz   | HBS: 61.5  |
|    | 2.5  | M6/3m           |                       |              |              |       |           | DTQ(S)3200-62.59-YPEJ100L<br>-4-3.8kW-380V/120Hz   | AC: 195    |
|    | 2    | M7/4m           |                       |              |              |       |           |                                                    | LBS: 372   |
| 3  | 3.2  | M5/2m           | 1.0-6.3<br>(1.2-7.6)  | 4.0<br>(4.8) | 100<br>(120) | 49.46 | 40        | DTQ(S)3200-49.46-YPEJ100L<br>-4-4.0kW-380V/100Hz   | ADS: 141   |
|    | 2.5  | M6/3m           |                       |              |              |       |           | DTQ(S)3200-49.46-YPEJ100L<br>-4-4.8kW-380V/120Hz   | HBS: 61.5  |
|    | 2    | M7/4m           |                       |              |              |       |           |                                                    | AC: 195    |
| 4  | 2.5  | M5/2m           | 1.3-8.0<br>(1.6-9.6)  | 4.0<br>(4.8) | 100<br>(120) | 39.43 | 40        | DTQ (S) 3200-39.43-YPEJ100L<br>-4-4.0kW-380V/100Hz | LBS: 372   |
|    | 2    | M6/3m           |                       |              |              |       |           | DTQ (S) 3200-39.43-YPEJ100L<br>-4-4.8kW-380V/120Hz | ADS: 141   |
|    | 1.6  | M7/4m           |                       |              |              |       |           |                                                    | HBS: 61.5  |

## DTQB(S)3200 Explosion-Proof Electric Hoist (Dual Brake) Variable Frequency Lifting Reducer

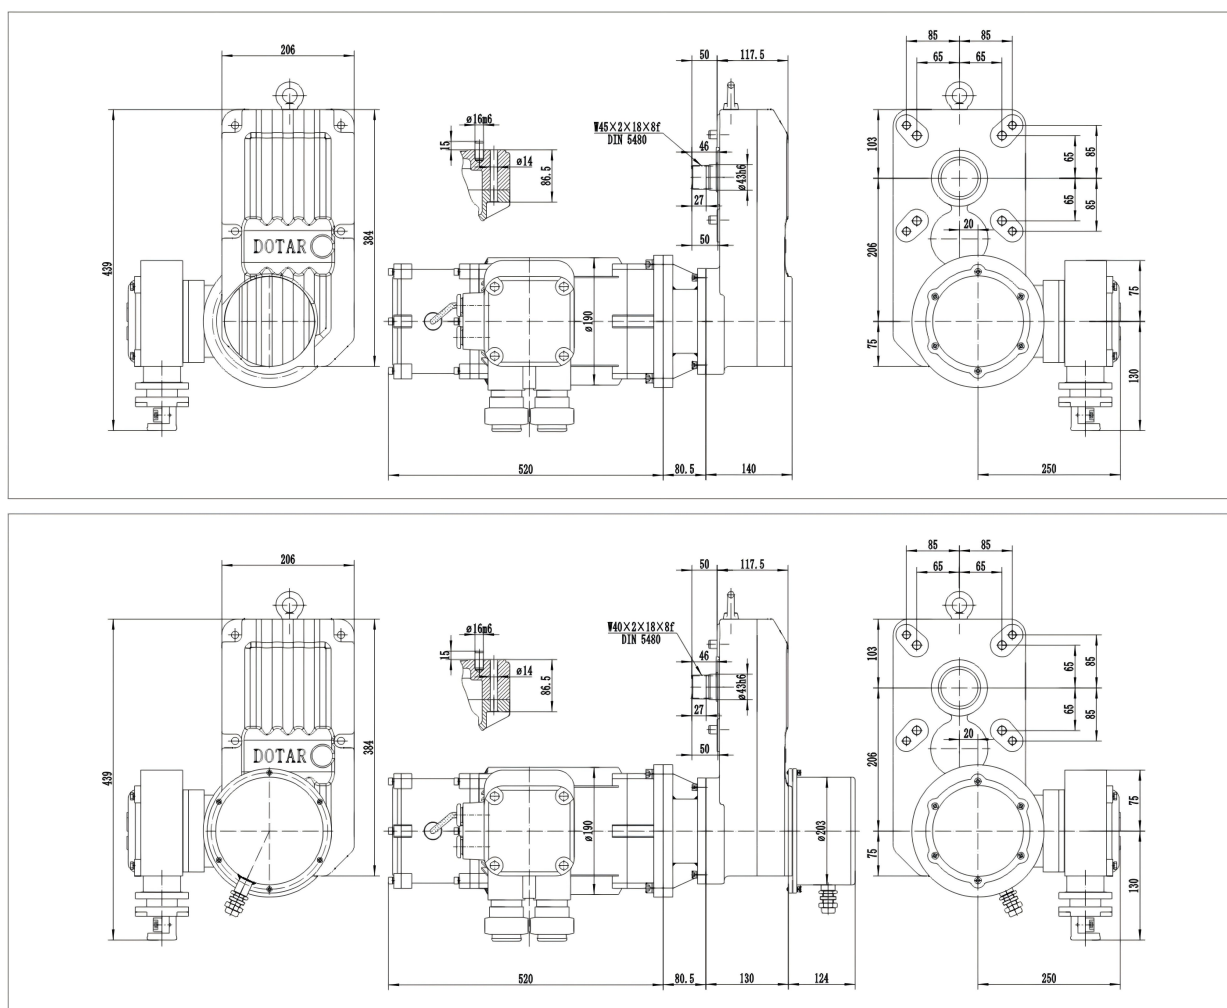


卷筒直径140mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW   | 频率Hz         | 减速比   | 扭矩<br>N.m | 型号                          |
|----|------|-----------------|-----------------------|--------------|--------------|-------|-----------|-----------------------------|
| 1  | 3.2  | M5/2m           | 0.66-4.0<br>(0.8-4.8) | 2.5<br>(3.0) | 100<br>(120) | 78.63 | 28        | DTQB(S)3200-78.63-YBZPE100L |
|    | 2.5  | M6/3m           |                       |              |              |       |           | -4-2.5kW-380V/100Hz         |
|    | 2    | M7/4m           |                       |              |              |       |           | DTQB(S)3200-78.63-YBZPE100L |
| 2  | 3.2  | M5/2m           | 0.8-5.0<br>(1.0-6.0)  | 3.2<br>(3.8) | 100<br>(120) | 62.59 | 28        | -4-3.0kW-380V/120Hz         |
|    | 2.5  | M6/3m           |                       |              |              |       |           | DTQB(S)3200-62.59-YBZPE100L |
|    | 2    | M7/4m           |                       |              |              |       |           | -4-3.2kW-380V/100Hz         |
| 3  | 3.2  | M5/2m           | 1.0-6.3<br>(1.2-7.6)  | 4.0<br>(4.8) | 100<br>(120) | 49.46 | 40        | DTQB(S)3200-62.59-YBZPE100L |
|    | 2.5  | M6/3m           |                       |              |              |       |           | -4-3.8kW-380V/120Hz         |
|    | 2    | M7/4m           |                       |              |              |       |           | DTQB(S)3200-49.46-YBZPE100L |
| 4  | 2.5  | M5/2m           | 1.3-8.0<br>(1.6-9.6)  | 4.0<br>(4.8) | 100<br>(120) | 39.43 | 40        | -4-4.0kW-380V/100Hz         |
|    | 2    | M6/3m           |                       |              |              |       |           | DTQB(S)3200-49.46-YBZPE100L |
|    | 1.6  | M7/4m           |                       |              |              |       |           | -4-4.8kW-380V/120Hz         |

## DTQ(S)5000 Electric Hoist (Dual Brake) Two-Speed Lifting Reducer

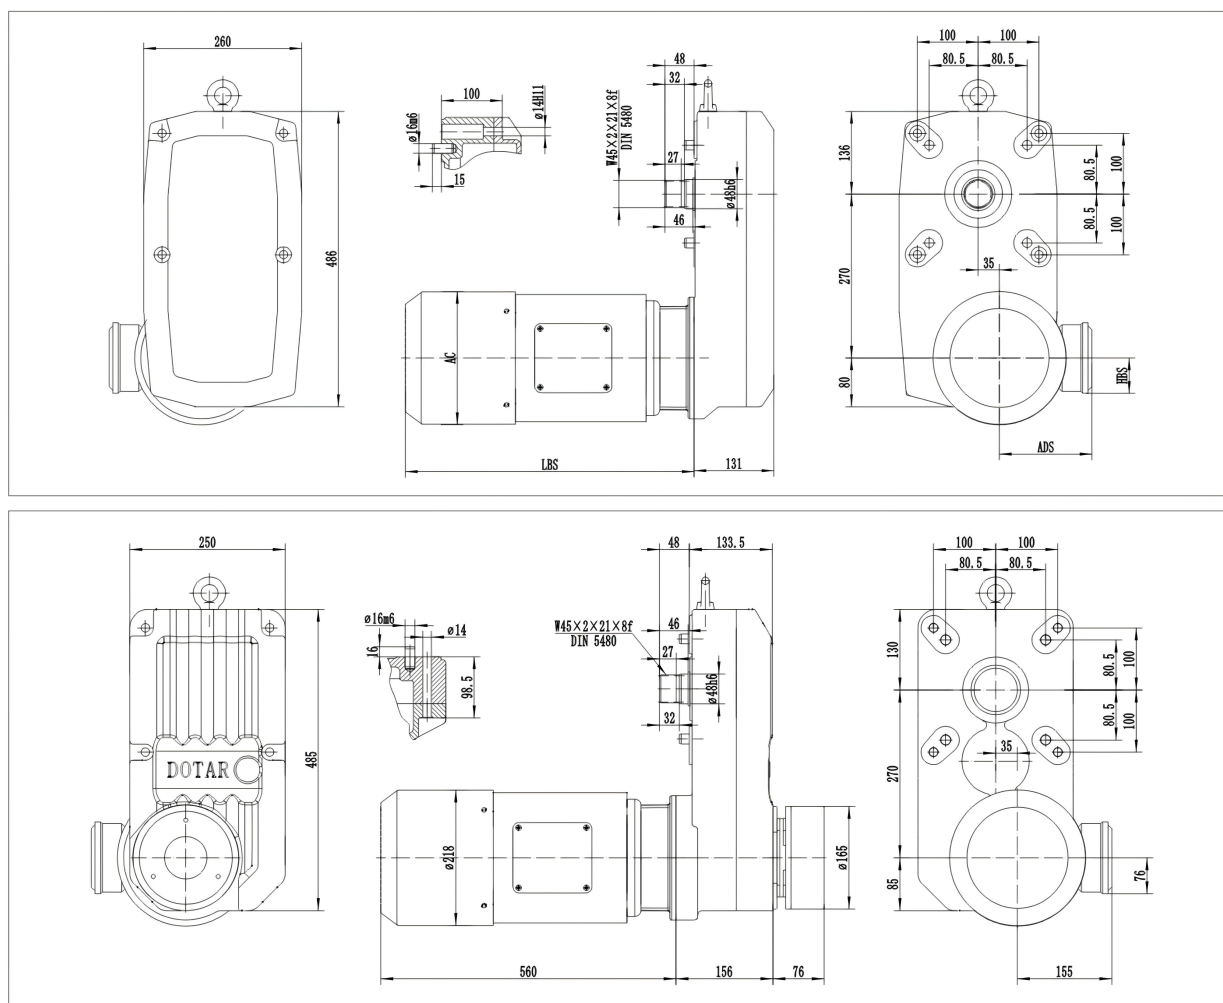


卷筒直径170mm 滑轮倍率4/1

帶“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW            | 频率Hz       | 减速比   | 扭矩<br>N.m | 型号                                                                                                              | 电机<br>相关尺寸                                 |
|----|------|-----------------|-----------------------|-----------------------|------------|-------|-----------|-----------------------------------------------------------------------------------------------------------------|--------------------------------------------|
| 1  | 6.8  | M5/2m           | 0.66/4.0<br>(0.8/4.8) | 0.8/4.9<br>(1.0/5.9)  | 50<br>(60) | 91.2  | 45        | DTQ(S)5000-91.2-YEJ112M<br>-12/2-0.8/4.9kW-380V/50Hz<br>DTQ(S)5000-91.2-YEJ112M<br>-12/2-1.0/5.9kW-380V/60Hz    | AC: 220<br>LBS: 438<br>ADS: 152<br>HBS: 58 |
| 2  | 6.8  | M5/2m           | 0.8/5.0<br>(1.0/6.0)  | 1.0/6.1<br>(1.2/7.3)  | 50<br>(60) | 74.8  | 60        | DTQ(S)5000-74.8-YEJ112M<br>-12/2-1.0/6.1kW-380V/50Hz<br>DTQ(S)5000-74.8-YEJ112M<br>-12/2-1.2/7.3kW-380V/60Hz    | AC: 220<br>LBS: 488<br>ADS: 152<br>HBS: 58 |
| 3  | 6.8  | M4/1Am          | 1.0/6.3<br>(1.2/7.6)  | 1.3/7.7<br>(1.6/9.2)  | 50<br>(60) | 59.96 | 70        | DTQ(S)5000-59.96-YEJ132M<br>-12/2-1.3/7.7kW-380V/50Hz<br>DTQ(S)5000-59.96-YEJ132M<br>-12/2-1.6/9.2kW-380V/60Hz  | AC: 270<br>LBS: 540<br>ADS: 190<br>HBS: 84 |
| 4  | 6.8  | M4/1Am          | 1.3/8.0<br>(1.6/9.6)  | 1.6/9.8<br>(1.9/11.8) | 50<br>(60) | 50.14 | 100       | DTQ(S)5000-50.14-YEJ132M<br>-12/2-1.6/9.8kW-380V/50Hz<br>DTQ(S)5000-50.14-YEJ132M<br>-12/2-1.9/11.8kW-380V/60Hz | AC: 270<br>LBS: 570<br>ADS: 190<br>HBS: 84 |



## DTQ(S)5000 Electric Hoist (Dual Brake) Variable Frequency Lifting Reducerr

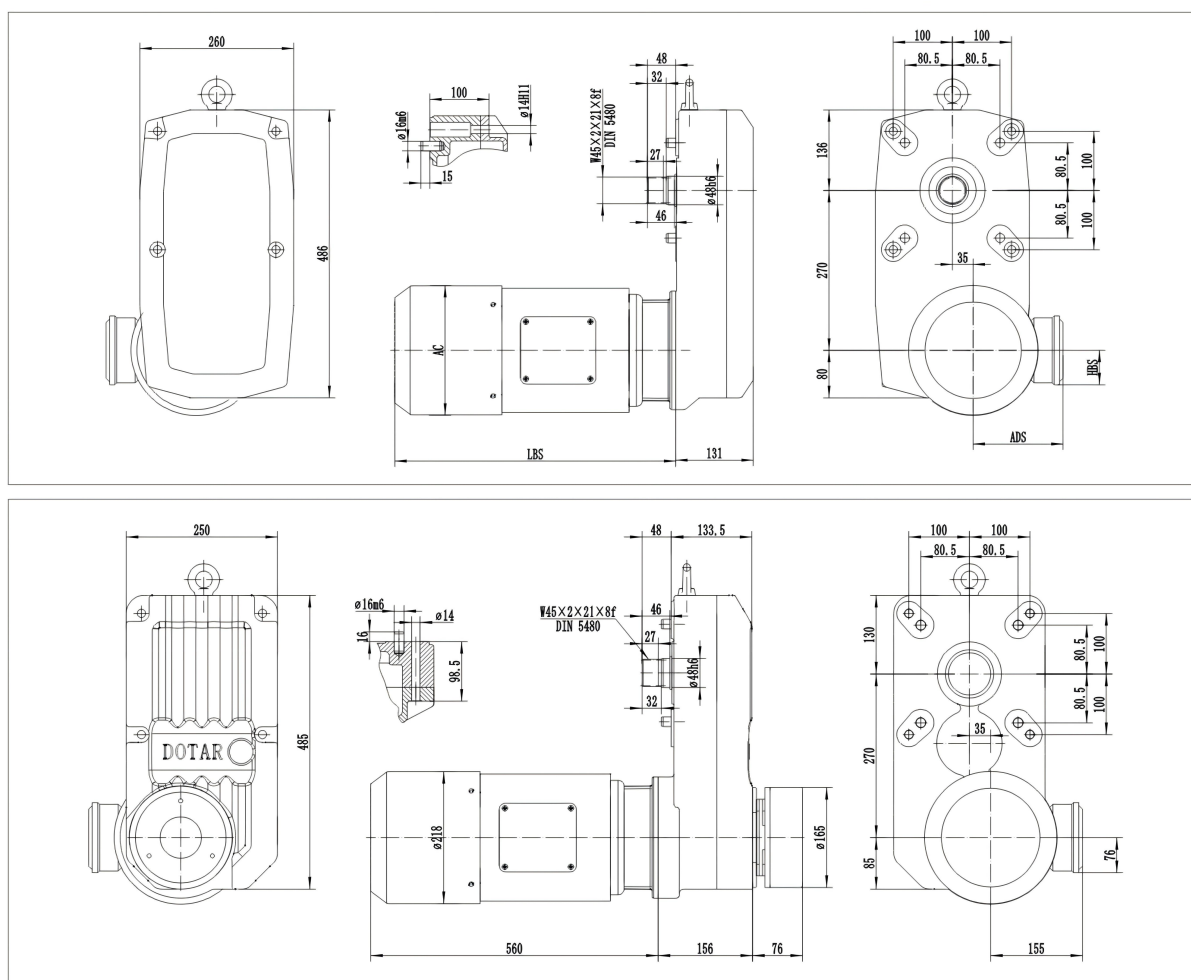


卷筒直径170mm 滑轮倍率4/1

帶“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW    | 频率Hz         | 减速比   | 扭矩<br>N.m | 型号                                                                                                    | 电机<br>相关尺寸                                 |
|----|------|-----------------|-----------------------|---------------|--------------|-------|-----------|-------------------------------------------------------------------------------------------------------|--------------------------------------------|
| 1  | 6.8  | M5/2m           | 0.66-4.0<br>(0.8-4.8) | 4.9<br>(5.9)  | 100<br>(120) | 91.2  | 45        | DTQ(S)5000-91.2-YPEJ112M<br>-4-4.9kW-380V/100Hz<br>DTQ(S)5000-91.2-YPEJ112M<br>-4-5.9kW-380V/120Hz    | AC: 220<br>LBS: 438<br>ADS: 152<br>HBS: 58 |
| 2  | 6.8  | M5/2m           | 0.8-5.0<br>(1.0-6.0)  | 6.1<br>(7.3)  | 100<br>(120) | 74.8  | 60        | DTQ(S)5000-74.8-YPEJ112M<br>-4-6.1kW-380V/100Hz<br>DTQ(S)5000-74.8-YPEJ112M<br>-4-7.3kW-380V/120Hz    | AC: 220<br>LBS: 488<br>ADS: 152<br>HBS: 58 |
| 3  | 6.8  | M4/1Am          | 1.0-6.3<br>(1.2-7.6)  | 7.6<br>(9.1)  | 100<br>(120) | 59.96 | 70        | DTQ(S)5000-59.96-YPEJ132M<br>-4-7.6kW-380V/100Hz<br>DTQ(S)5000-59.96-YPEJ132M<br>-4-9.1kW-380V/120Hz  | AC: 270<br>LBS: 540<br>ADS: 190<br>HBS: 84 |
| 4  | 6.8  | M4/1Am          | 1.3-8.0<br>(1.6-9.6)  | 9.5<br>(11.4) | 100<br>(120) | 50.14 | 100       | DTQ(S)5000-50.14-YPEJ132M<br>-4-9.5kW-380V/100Hz<br>DTQ(S)5000-50.14-YPEJ132M<br>-4-11.4kW-380V/120Hz | AC: 270<br>LBS: 570<br>ADS: 190<br>HBS: 84 |

## DTQB(S)5000 Explosion-Proof Electric Hoist (Dual Brake) Variable Frequency Lifting Reducerr


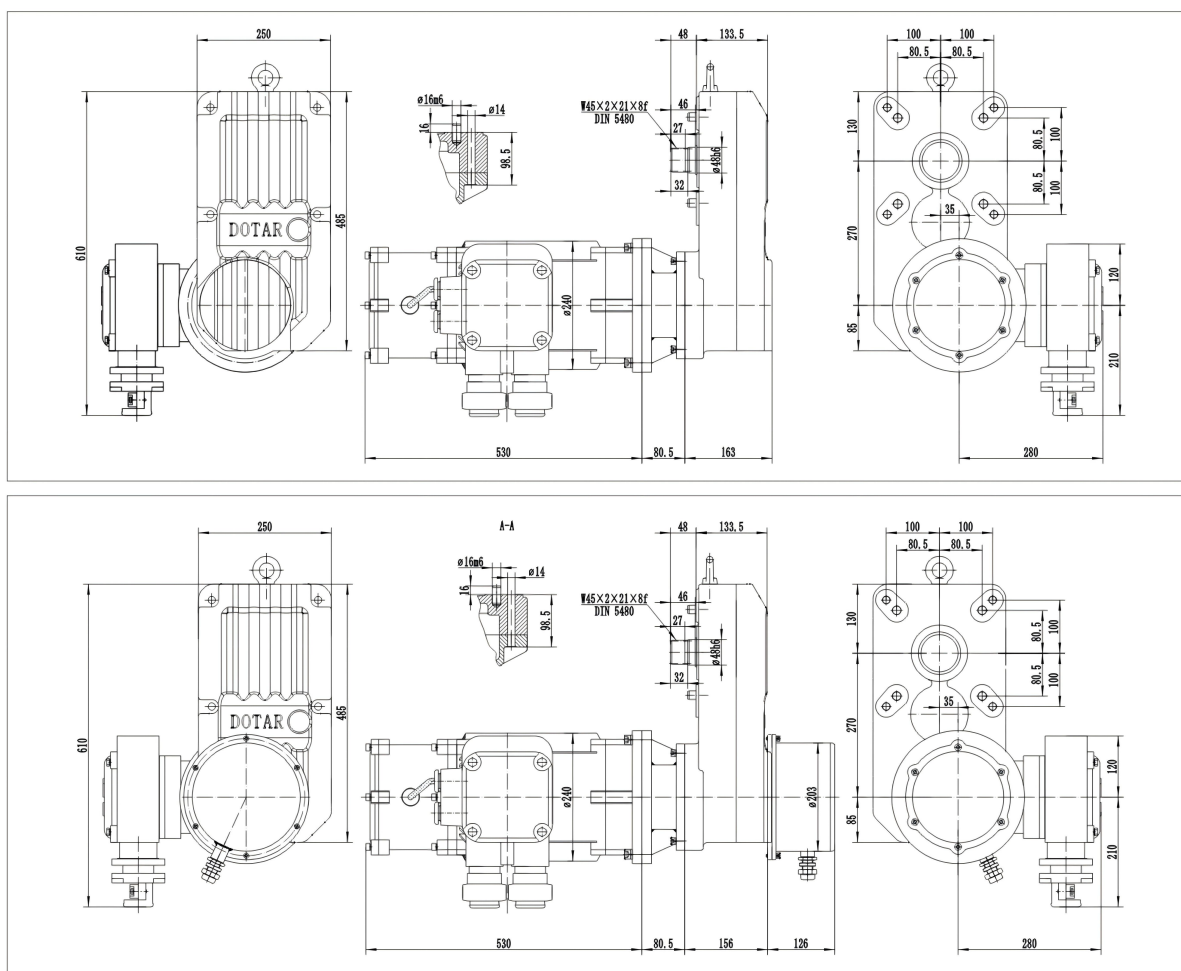


卷筒直径170mm 滑轮倍率4/1

帶“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW    | 频率Hz         | 减速比   | 扭矩<br>N.m | 型号                                                                                                        |
|----|------|-----------------|-----------------------|---------------|--------------|-------|-----------|-----------------------------------------------------------------------------------------------------------|
| 1  | 6.8  | M5/2m           | 0.66-4.0<br>(0.8-4.8) | 4.9<br>(5.9)  | 100<br>(120) | 91.2  | 45        | DTQB(S)5000-91.2-YBZPE112M<br>-4-4.9kW-380V/100Hz<br>DTQB(S)5000-91.2-YBZPE112M<br>-4-5.9kW-380V/120Hz    |
| 2  | 6.8  | M5/2m           | 0.8-5.0<br>(1.0-6.0)  | 6.1<br>(7.3)  | 100<br>(120) | 74.8  | 60        | DTQB(S)5000-74.8-YBZPE112M<br>-4-6.1kW-380V/100Hz<br>DTQB(S)5000-74.8-YBZPE112M<br>-4-7.3kW-380V/120Hz    |
| 3  | 6.8  | M4/1Am          | 1.0-6.3<br>(1.2-7.6)  | 7.6<br>(9.1)  | 100<br>(120) | 59.96 | 70        | DTQB(S)5000-59.96-YBZPE132M<br>-4-7.6kW-380V/100Hz<br>DTQB(S)5000-59.96-YBZPE132M<br>-4-9.1kW-380V/120Hz  |
| 4  | 6.8  | M4/1Am          | 1.3-8.0<br>(1.6-9.6)  | 9.5<br>(11.4) | 100<br>(120) | 50.14 | 100       | DTQB(S)5000-50.14-YBZPE132M<br>-4-9.5kW-380V/100Hz<br>DTQB(S)5000-50.14-YBZPE132M<br>-4-11.4kW-380V/120Hz |

# DTQ(S)10000 Electric Hoist (Dual Brake) Two-Speed Lifting Reducer

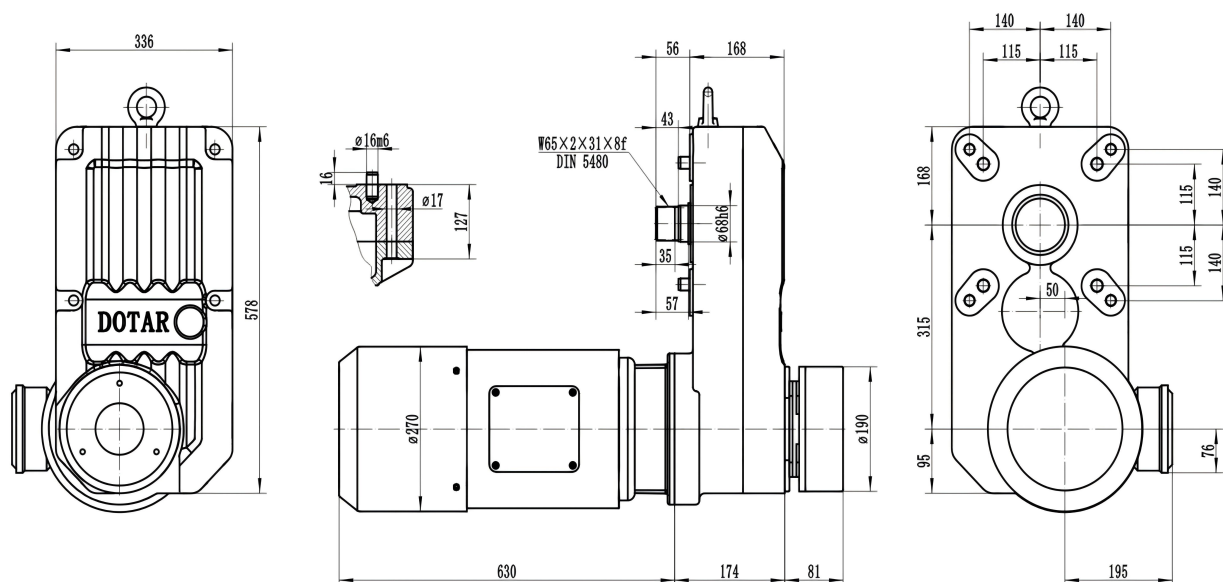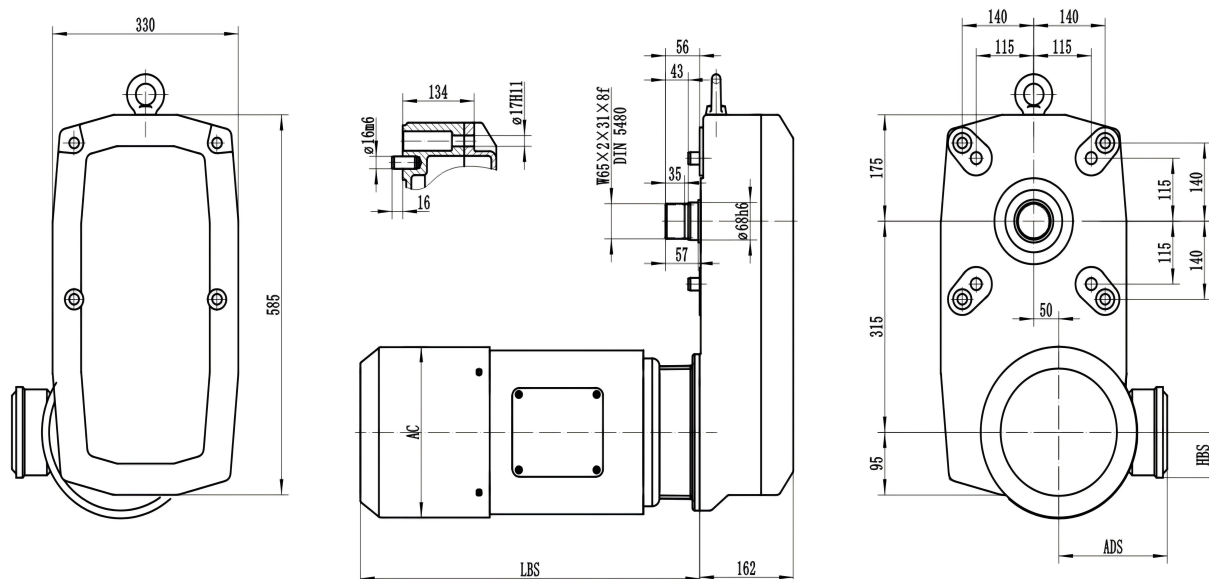





卷筒直径266mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW             | 频率Hz       | 减速比   | 扭矩<br>N.m | 型号                                                      | 电机<br>相关尺寸                                 |
|----|------|-----------------|-----------------------|------------------------|------------|-------|-----------|---------------------------------------------------------|--------------------------------------------|
| 1  | 10   | M5/2m           | 0.66/4.0<br>(0.8/4.8) | 1.2/7.6<br>(1.44/9.1)  | 50<br>(60) | 152.9 | 70        | DTQ(S)10000-152.9-YEJ132L<br>-12/2-1.2/7.6kW-380V/50Hz  | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 8    | M6/3m           |                       |                        |            |       |           |                                                         |                                            |
|    | 6.3  | M7/4m           |                       |                        |            |       |           | DTQ(S)10000-152.9-YEJ132L<br>-12/2-1.44/9.1kW-380V/60Hz |                                            |
|    | 5    | M7/4m           |                       |                        |            |       |           |                                                         |                                            |
| 2  | 10   | M5/2m           | 0.8/5.0<br>(1.0/6.0)  | 1.5/9.5<br>(1.8/11.4)  | 50<br>(60) | 118.5 | 100       | DTQ(S)10000-118.5-YEJ132L<br>-12/2-1.5/9.5kW-380V/50Hz  | AC: 270<br>LBS: 579<br>ADS: 190<br>HBS: 84 |
|    | 8    | M6/3m           |                       |                        |            |       |           |                                                         |                                            |
|    | 6.3  | M7/4m           |                       |                        |            |       |           | DTQ(S)10000-118.5-YEJ132L<br>-12/2-1.8/11.4kW-380V/60Hz |                                            |
|    | 5    | M7/4m           |                       |                        |            |       |           |                                                         |                                            |
| 3  | 8    | M5/2m           | 1.0/6.3<br>(1.2/7.6)  | 1.5/9.5<br>(1.8/11.4)  | 50<br>(60) | 93.9  | 100       | DTQ(S)10000-93.9-YEJ132L<br>-12/2-1.5/9.5kW-380V/50Hz   | AC: 270<br>LBS: 579<br>ADS: 190<br>HBS: 84 |
|    | 6.3  | M6/3m           |                       |                        |            |       |           |                                                         |                                            |
|    | 5    | M7/4m           |                       |                        |            |       |           | DTQ(S)10000-93.9-YEJ132L<br>-12/2-1.8/11.4kW-380V/60Hz  |                                            |
|    | 4    | M7/4m           |                       |                        |            |       |           |                                                         |                                            |
| 4  | 6.3  | M5/2m           | 1.3/8.0<br>(1.6/9.6)  | 1.5/9.5<br>(1.8/11.4)  | 50<br>(60) | 73.6  | 100       | DTQ(S)10000-73.6-YEJ132L<br>-12/2-1.5/9.5kW-380V/50Hz   | AC: 270<br>LBS: 579<br>ADS: 190<br>HBS: 84 |
|    | 5    | M6/3m           |                       |                        |            |       |           |                                                         |                                            |
|    | 4    | M7/4m           |                       |                        |            |       |           | DTQ(S)10000-73.6-YEJ132L<br>-12/2-1.8/11.4kW-380V/60Hz  |                                            |
|    | 3.2  | M7/4m           |                       |                        |            |       |           |                                                         |                                            |
| 5  | 12.5 | M5/2m           | 0.66/4.0<br>(0.8/4.8) | 1.5/9.5<br>(1.8/11.4)  | 50<br>(60) | 152.9 | 100       | DTQ(S)10000-152.9-YEJ132L<br>-12/2-1.5/9.5kW-380V/50Hz  | AC: 270<br>LBS: 579<br>ADS: 190<br>HBS: 84 |
|    | 10   | M6/3m           |                       |                        |            |       |           |                                                         |                                            |
|    | 8    | M7/4m           |                       |                        |            |       |           | DTQ(S)10000-152.9-YEJ132L<br>-12/2-1.8/11.4kW-380V/60Hz |                                            |
|    | 6.3  | M7/4m           |                       |                        |            |       |           |                                                         |                                            |
| 6  | 12.5 | M4/1Am          | 0.8/5.0<br>(1.0/6.0)  | 2.0/12.5<br>(2.4/15.0) | 50<br>(60) | 118.5 | 100       | DTQ(S)10000-118.5-YEJ132L<br>-12/2-2.0/12.5kW-380V/50Hz | AC: 270<br>LBS: 619<br>ADS: 190<br>HBS: 84 |
|    | 10   | M5/2m           |                       |                        |            |       |           |                                                         |                                            |
|    | 8    | M6/3m           |                       |                        |            |       |           | DTQ(S)10000-118.5-YEJ132L<br>-12/2-2.4/15.0kW-380V/60Hz |                                            |
|    | 6.3  | M7/4m           |                       |                        |            |       |           |                                                         |                                            |
| 7  | 10   | M4/1Am          | 1.0/6.3<br>(1.2/7.6)  | 2.0/12.5<br>(2.4/15.0) | 50<br>(60) | 93.9  | 100       | DTQ(S)10000-93.9-YEJ132L<br>-12/2-2.0/12.5kW-380V/50Hz  | AC: 270<br>LBS: 619<br>ADS: 190<br>HBS: 84 |
|    | 8    | M5/2m           |                       |                        |            |       |           |                                                         |                                            |
|    | 6.3  | M6/3m           |                       |                        |            |       |           | DTQ(S)10000-93.9-YEJ132L<br>-12/2-2.4/15.0kW-380V/60Hz  |                                            |
|    | 5    | M7/4m           |                       |                        |            |       |           |                                                         |                                            |
| 8  | 8    | M4/1Am          | 1.3/8.0<br>(1.6/9.6)  | 2.0/12.5<br>(2.4/15.0) | 50<br>(60) | 73.6  | 100       | DTQ(S)10000-73.6-YEJ132L<br>-12/2-2.0/12.5kW-380V/50Hz  | AC: 270<br>LBS: 619<br>ADS: 190<br>HBS: 84 |
|    | 6.3  | M5/2m           |                       |                        |            |       |           |                                                         |                                            |
|    | 5    | M6/3m           |                       |                        |            |       |           | DTQ(S)10000-73.6-YEJ132L<br>-12/2-2.4/15.0kW-380V/60Hz  |                                            |
|    | 4    | M7/4m           |                       |                        |            |       |           |                                                         |                                            |

# DTQ(S)10000 Electric Hoist (Dual Brake) Variable Frequency Lifting Reducer

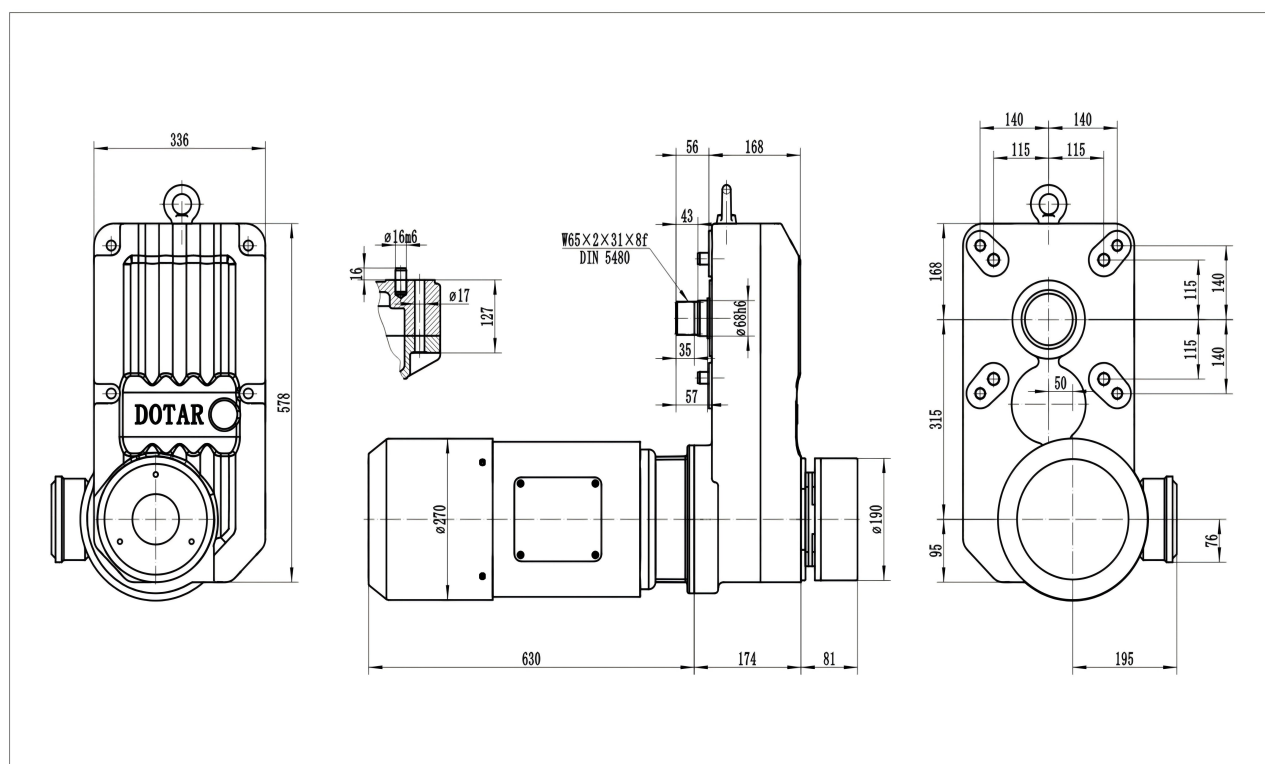
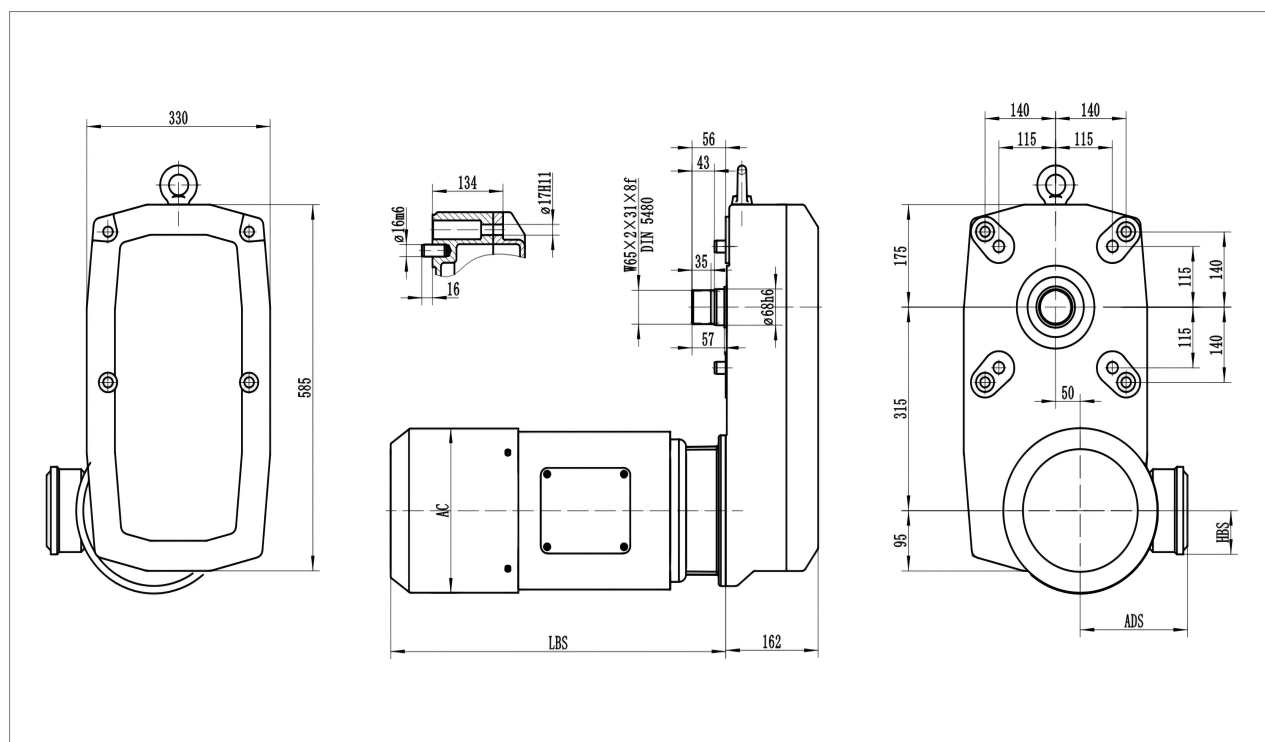


卷筒直径266mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW     | 频率Hz         | 减速比   | 扭矩<br>N.m | 型号                                                 | 电机<br>相关尺寸                                 |
|----|------|-----------------|-----------------------|----------------|--------------|-------|-----------|----------------------------------------------------|--------------------------------------------|
| 1  | 10   | M5/2m           | 0.66-4.0<br>(0.8-4.8) | 7.6<br>(9.1)   | 100<br>(120) | 152.9 | 70        | DTQ(S)10000-152.9-YPEJ132L<br>-4-7.6kW-380V/100Hz  | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 8    | M6/3m           |                       |                |              |       |           |                                                    |                                            |
|    | 6.3  | M7/4m           |                       |                |              |       |           | DTQ(S)10000-152.9-YPEJ132L<br>-4-9.1kW-380V/120Hz  |                                            |
|    | 5    | M7/4m           |                       |                |              |       |           |                                                    |                                            |
| 2  | 10   | M5/2m           | 0.8-5.0<br>(1.0-6.0)  | 9.5<br>(11.4)  | 100<br>(120) | 118.5 | 100       | DTQ(S)10000-118.5-YPEJ132L<br>-4-9.5kW-380V/100Hz  | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 8    | M6/3m           |                       |                |              |       |           |                                                    |                                            |
|    | 6.3  | M7/4m           |                       |                |              |       |           | DTQ(S)10000-118.5-YPEJ132L<br>-4-11.4kW-380V/120Hz |                                            |
|    | 5    | M7/4m           |                       |                |              |       |           |                                                    |                                            |
| 3  | 8    | M5/2m           | 1.0-6.3<br>(1.2-7.6)  | 9.5<br>(11.4)  | 100<br>(120) | 93.9  | 100       | DTQ(S)10000-93.9-YPEJ132L<br>-4-9.5kW-380V/100Hz   | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 6.3  | M6/3m           |                       |                |              |       |           |                                                    |                                            |
|    | 5    | M7/4m           |                       |                |              |       |           | DTQ(S)10000-93.9-YPEJ132L<br>-4-11.4kW-380V/120Hz  |                                            |
|    | 4    | M7/4m           |                       |                |              |       |           |                                                    |                                            |
| 4  | 6.3  | M5/2m           | 1.3-8.0<br>(1.6-9.6)  | 9.5<br>(11.4)  | 100<br>(120) | 73.6  | 100       | DTQ(S)10000-73.6-YPEJ132L<br>-4-9.5kW-380V/100Hz   | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 5    | M6/3m           |                       |                |              |       |           |                                                    |                                            |
|    | 4    | M7/4m           |                       |                |              |       |           | DTQ(S)10000-73.6-YPEJ132L<br>-4-11.4kW-380V/120Hz  |                                            |
|    | 3.2  | M7/4m           |                       |                |              |       |           |                                                    |                                            |
| 5  | 12.5 | M5/2m           | 0.66-4.0<br>(0.8-4.8) | 9.5<br>(11.4)  | 100<br>(120) | 152.9 | 100       | DTQ(S)10000-152.9-YPEJ132L<br>-4-9.5kW-380V/100Hz  | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 10   | M6/3m           |                       |                |              |       |           |                                                    |                                            |
|    | 8    | M7/4m           |                       |                |              |       |           | DTQ(S)10000-152.9-YPEJ132L<br>-4-11.4kW-380V/120Hz |                                            |
|    | 6.3  | M7/4m           |                       |                |              |       |           |                                                    |                                            |
| 6  | 12.5 | M4/1Am          | 0.8-5.0<br>(1.0-6.0)  | 12.5<br>(15.0) | 100<br>(120) | 118.5 | 100       | DTQ(S)10000-118.5-YPEJ132L<br>-4-12.5kW-380V/100Hz | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 10   | M5/2m           |                       |                |              |       |           |                                                    |                                            |
|    | 8    | M6/3m           |                       |                |              |       |           | DTQ(S)10000-118.5-YPEJ132L<br>-4-15.0kW-380V/120Hz |                                            |
|    | 6.3  | M7/4m           |                       |                |              |       |           |                                                    |                                            |
| 7  | 10   | M4/1Am          | 1.0-6.3<br>(1.2-7.6)  | 12.5<br>(15.0) | 100<br>(120) | 93.9  | 100       | DTQ(S)10000-93.9-YPEJ132L<br>-4-12.5kW-380V/100Hz  | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 8    | M5/2m           |                       |                |              |       |           |                                                    |                                            |
|    | 6.3  | M6/3m           |                       |                |              |       |           | DTQ(S)10000-93.9-YPEJ132L<br>-4-15.0kW-380V/120Hz  |                                            |
|    | 5    | M7/4m           |                       |                |              |       |           |                                                    |                                            |
| 8  | 8    | M4/1Am          | 1.3-8.0<br>(1.6-9.6)  | 12.5<br>(15.0) | 100<br>(120) | 73.6  | 100       | DTQ(S)10000-73.6-YPEJ132L<br>-4-12.5kW-380V/100Hz  | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 6.3  | M5/2m           |                       |                |              |       |           |                                                    |                                            |
|    | 5    | M6/3m           |                       |                |              |       |           | DTQ(S)10000-73.6-YPEJ132L<br>-4-15.0kW-380V/120Hz  |                                            |
|    | 4    | M7/4m           |                       |                |              |       |           |                                                    |                                            |

# DTQB(S)10000 Explosion-Proof Electric Hoist (Dual Brake) Variable Frequency Lifting Reducer

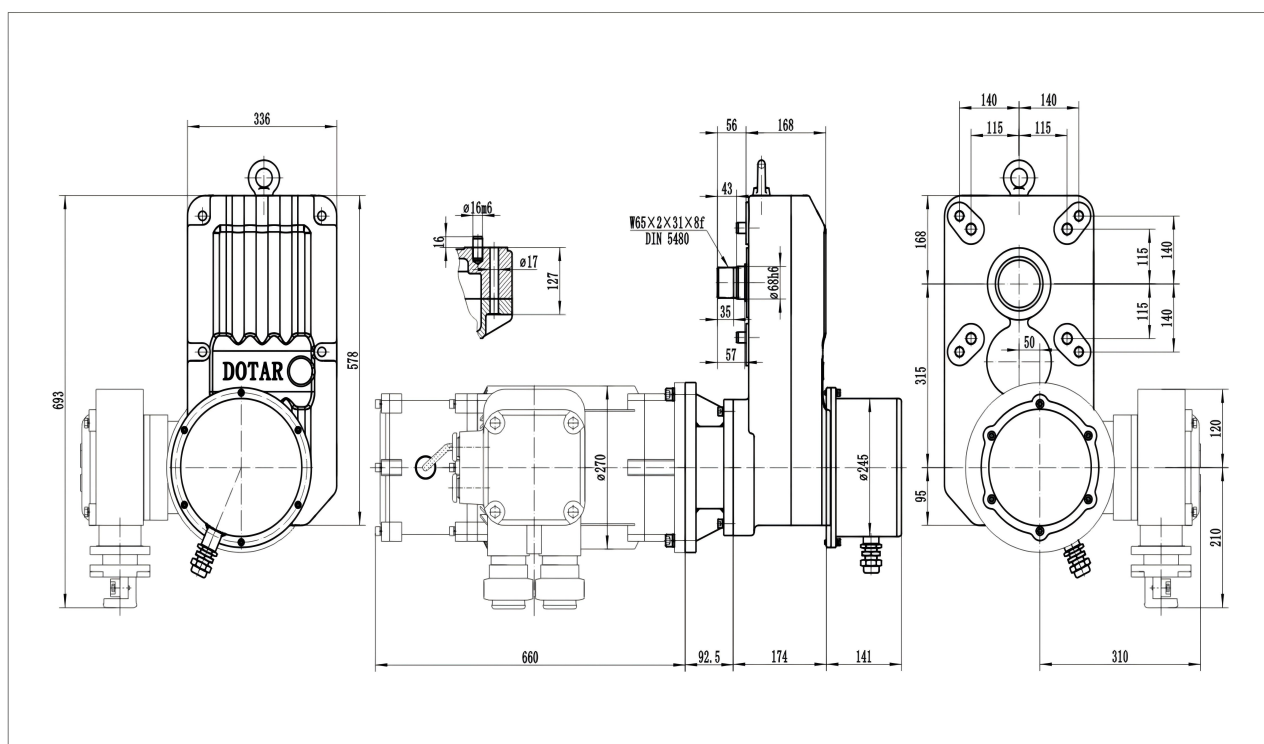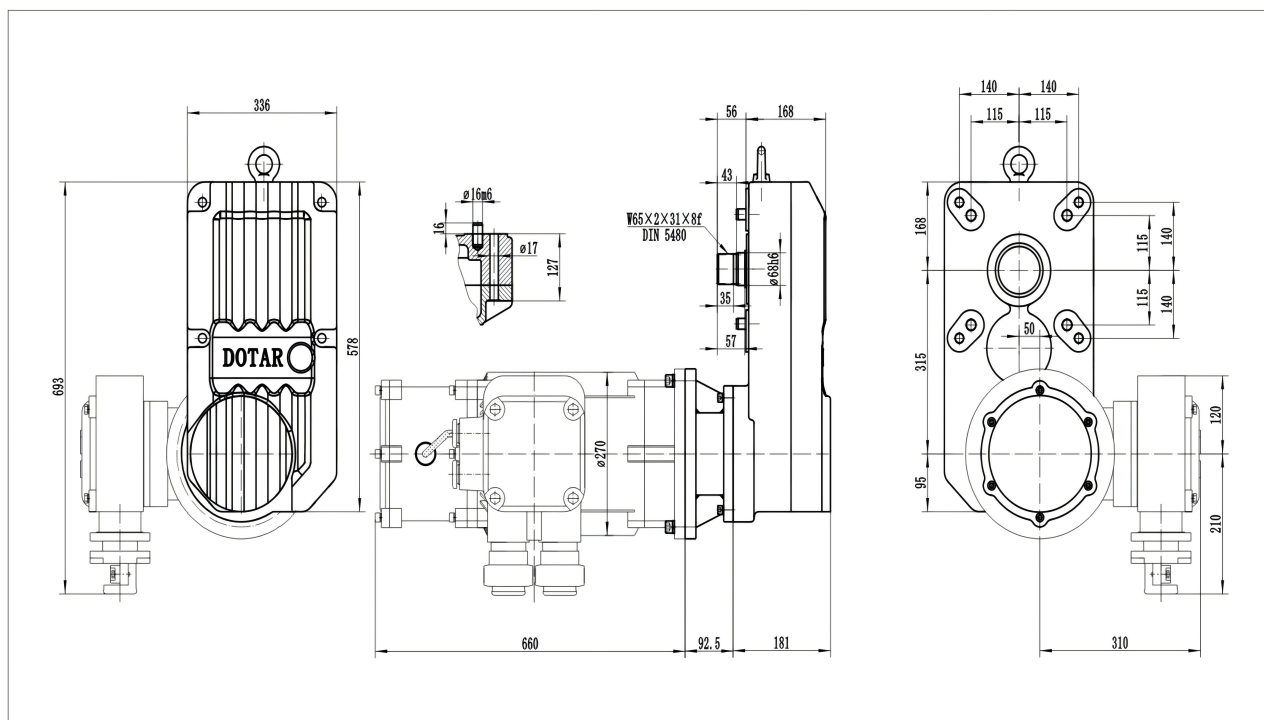




卷筒直径266mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW     | 频率Hz         | 减速比   | 扭矩<br>N.m | 型号                                                   |
|----|------|-----------------|-----------------------|----------------|--------------|-------|-----------|------------------------------------------------------|
| 1  | 10   | M5/2m           | 0.66-4.0<br>(0.8-4.8) | 7.6<br>(9.1)   | 100<br>(120) | 152.9 | 70        | DTQB(S)10000-152.9-YBZPE132L<br>-4-7.6kW-380V/100Hz  |
|    | 8    | M6/3m           |                       |                |              |       |           | DTQB(S)10000-152.9-YBZPE132L<br>-4-9.1kW-380V/120Hz  |
|    | 6.3  | M7/4m           |                       |                |              |       |           |                                                      |
|    | 5    | M7/4m           |                       |                |              |       |           |                                                      |
| 2  | 10   | M5/2m           | 0.8-5.0<br>(1.0-6.0)  | 9.5<br>(11.4)  | 100<br>(120) | 118.5 | 100       | DTQB(S)10000-118.5-YBZPE132L<br>-4-9.5kW-380V/100Hz  |
|    | 8    | M6/3m           |                       |                |              |       |           | DTQB(S)10000-118.5-YBZPE132L<br>-4-11.4kW-380V/120Hz |
|    | 6.3  | M7/4m           |                       |                |              |       |           |                                                      |
|    | 5    | M7/4m           |                       |                |              |       |           |                                                      |
| 3  | 8    | M5/2m           | 1.0-6.3<br>(1.2-7.6)  | 9.5<br>(11.4)  | 100<br>(120) | 93.9  | 100       | DTQB(S)10000-93.9-YBZPE132L<br>-4-9.5kW-380V/100Hz   |
|    | 6.3  | M6/3m           |                       |                |              |       |           | DTQB(S)10000-93.9-YBZPE132L<br>-4-11.4kW-380V/120Hz  |
|    | 5    | M7/4m           |                       |                |              |       |           |                                                      |
|    | 4    | M7/4m           |                       |                |              |       |           |                                                      |
| 4  | 6.3  | M5/2m           | 1.3-8.0<br>(1.6-9.6)  | 9.5<br>(11.4)  | 100<br>(120) | 73.6  | 100       | DTQB(S)10000-73.6-YBZPE132L<br>-4-9.5kW-380V/100Hz   |
|    | 5    | M6/3m           |                       |                |              |       |           | DTQB(S)10000-73.6-YBZPE132L<br>-4-11.4kW-380V/120Hz  |
|    | 4    | M7/4m           |                       |                |              |       |           |                                                      |
|    | 3.2  | M7/4m           |                       |                |              |       |           |                                                      |
| 5  | 12.5 | M5/2m           | 0.66-4.0<br>(0.8-4.8) | 9.5<br>(11.4)  | 100<br>(120) | 152.9 | 100       | DTQB(S)10000-152.9-YBZPE132L<br>-4-9.5kW-380V/100Hz  |
|    | 10   | M6/3m           |                       |                |              |       |           | DTQB(S)10000-152.9-YBZPE132L<br>-4-11.4kW-380V/120Hz |
|    | 8    | M7/4m           |                       |                |              |       |           |                                                      |
|    | 6.3  | M7/4m           |                       |                |              |       |           |                                                      |
| 6  | 12.5 | M4/1Am          | 0.8-5.0<br>(1.0-6.0)  | 12.5<br>(15.0) | 100<br>(120) | 118.5 | 100       | DTQB(S)10000-118.5-YBZPE132L<br>-4-12.5kW-380V/100Hz |
|    | 10   | M5/2m           |                       |                |              |       |           | DTQB(S)10000-118.5-YBZPE132L<br>-4-15.0kW-380V/120Hz |
|    | 8    | M6/3m           |                       |                |              |       |           |                                                      |
|    | 6.3  | M7/4m           |                       |                |              |       |           |                                                      |
| 7  | 10   | M4/1Am          | 1.0-6.3<br>(1.2-7.6)  | 12.5<br>(15.0) | 100<br>(120) | 93.9  | 100       | DTQB(S)10000-93.9-YBZPE132L<br>-4-12.5kW-380V/100Hz  |
|    | 8    | M5/2m           |                       |                |              |       |           | DTQB(S)10000-93.9-YBZPE132L<br>-4-15.0kW-380V/120Hz  |
|    | 6.3  | M6/3m           |                       |                |              |       |           |                                                      |
|    | 5    | M7/4m           |                       |                |              |       |           |                                                      |
| 8  | 8    | M4/1Am          | 1.3-8.0<br>(1.6-9.6)  | 12.5<br>(15.0) | 100<br>(120) | 73.6  | 100       | DTQB(S)10000-73.6-YBZPE132L<br>-4-12.5kW-380V/100Hz  |
|    | 6.3  | M5/2m           |                       |                |              |       |           | DTQB(S)10000-73.6-YBZPE132L<br>-4-15.0kW-380V/120Hz  |
|    | 5    | M6/3m           |                       |                |              |       |           |                                                      |
|    | 4    | M7/4m           |                       |                |              |       |           |                                                      |

## DTQ(S)20000 Electric Hoist (Dual Brake) Two-Speed Lifting Reducer

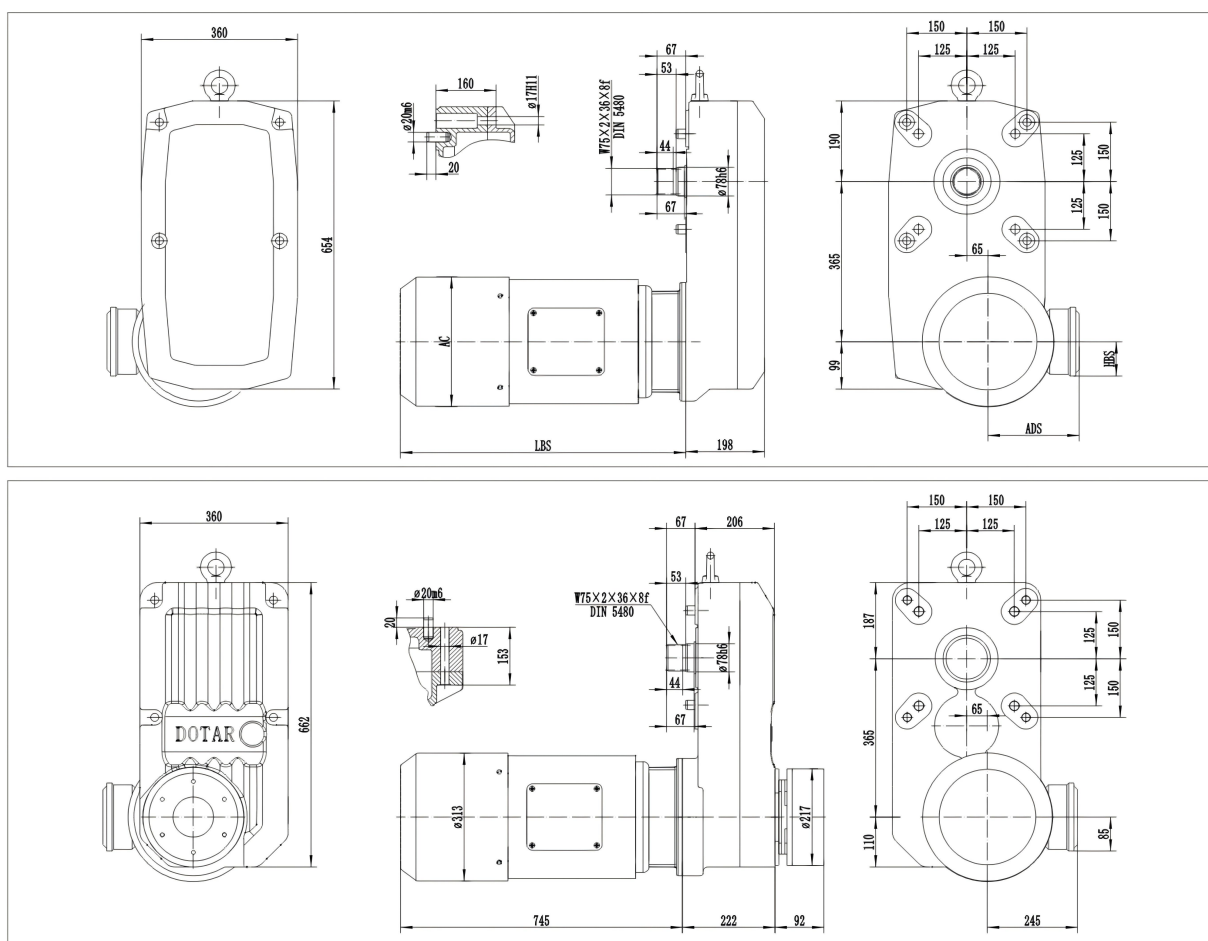


卷筒直径295mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW             | 频率Hz       | 减速比   | 扭矩<br>N.m | 型号                         | 电机<br>相关尺寸 |
|----|------|-----------------|-----------------------|------------------------|------------|-------|-----------|----------------------------|------------|
| 1  | 16   | M5/2m           | 0.66/4.0<br>(0.8/4.8) | 2.0/12.5<br>(2.4/15.0) | 50<br>(60) | 169   | 100       | DTQ(S)20000-169-YEJ132L    | AC: 270    |
|    | 12.5 | M6/3m           |                       |                        |            |       |           | -12/2-2.0/12.5kW-380V/50Hz | LBS: 619   |
|    | 10   | M7/4m           |                       |                        |            |       |           | DTQ(S)20000-169-YEJ132L    | ADS: 190   |
|    | 8    | M7/4m           |                       |                        |            |       |           | -12/2-2.4/15.0kW-380V/60Hz | HBS: 84    |
| 2  | 20   | M4/1Am          | 0.66/4.0<br>(0.8/4.8) | 2.6/16.0<br>(3.2/19.2) | 50<br>(60) | 169   | 150       | DTQ(S)20000-169-YEJ160L    | AC: 313    |
|    | 16   | M5/2m           |                       |                        |            |       |           | -12/2-2.6/16.0kW-380V/50Hz | LBS: 665   |
|    | 12.5 | M6/3m           |                       |                        |            |       |           | DTQ(S)20000-169-YEJ160L    | ADS: 234.5 |
|    | 10   | M7/4m           |                       |                        |            |       |           | -12/2-3.2/19.2kW-380V/60Hz | HBS: 84    |
| 3  | 16   | M4/1Am          | 0.8/5.0<br>(1.0/6.0)  | 2.6/16.0<br>(3.2/19.2) | 50<br>(60) | 132.9 | 150       | DTQ(S)20000-132.9-YEJ160L  | AC: 313    |
|    | 12.5 | M5/2m           |                       |                        |            |       |           | -12/2-2.6/16.0kW-380V/50Hz | LBS: 665   |
|    | 10   | M6/3m           |                       |                        |            |       |           | DTQ(S)20000-132.9-YEJ160L  | ADS: 234.5 |
|    | 8    | M7/4m           |                       |                        |            |       |           | -12/2-3.2/19.2kW-380V/60Hz | HBS: 84    |
| 4  | 12.5 | M4/1Am          | 1.0/6.3<br>(1.2/7.6)  | 2.6/16.0<br>(3.2/19.2) | 50<br>(60) | 109.3 | 150       | DTQ(S)20000-109.3-YEJ160L  | AC: 313    |
|    | 10   | M5/2m           |                       |                        |            |       |           | -12/2-2.6/16.0kW-380V/50Hz | LBS: 665   |
|    | 8    | M6/3m           |                       |                        |            |       |           | DTQ(S)20000-109.3-YEJ160L  | ADS: 234.5 |
|    | 6.3  | M7/4m           |                       |                        |            |       |           | -12/2-3.2/19.2kW-380V/60Hz | HBS: 84    |
| 5  | 10   | M4/1Am          | 1.3/8.0<br>(1.6/9.6)  | 2.6/16.0<br>(3.2/19.2) | 50<br>(60) | 85.1  | 150       | DTQ(S)20000-85.1-YEJ160L   | AC: 313    |
|    | 8    | M5/2m           |                       |                        |            |       |           | -12/2-2.6/16.0kW-380V/50Hz | LBS: 665   |
|    | 6.3  | M6/3m           |                       |                        |            |       |           | DTQ(S)20000-85.1-YEJ160L   | ADS: 234.5 |
|    | 5    | M7/4m           |                       |                        |            |       |           | -12/2-3.2/19.2kW-380V/60Hz | HBS: 84    |

## DTQ(S)20000 Electric Hoist (Dual Brake) Variable Frequency Lifting Reducerr

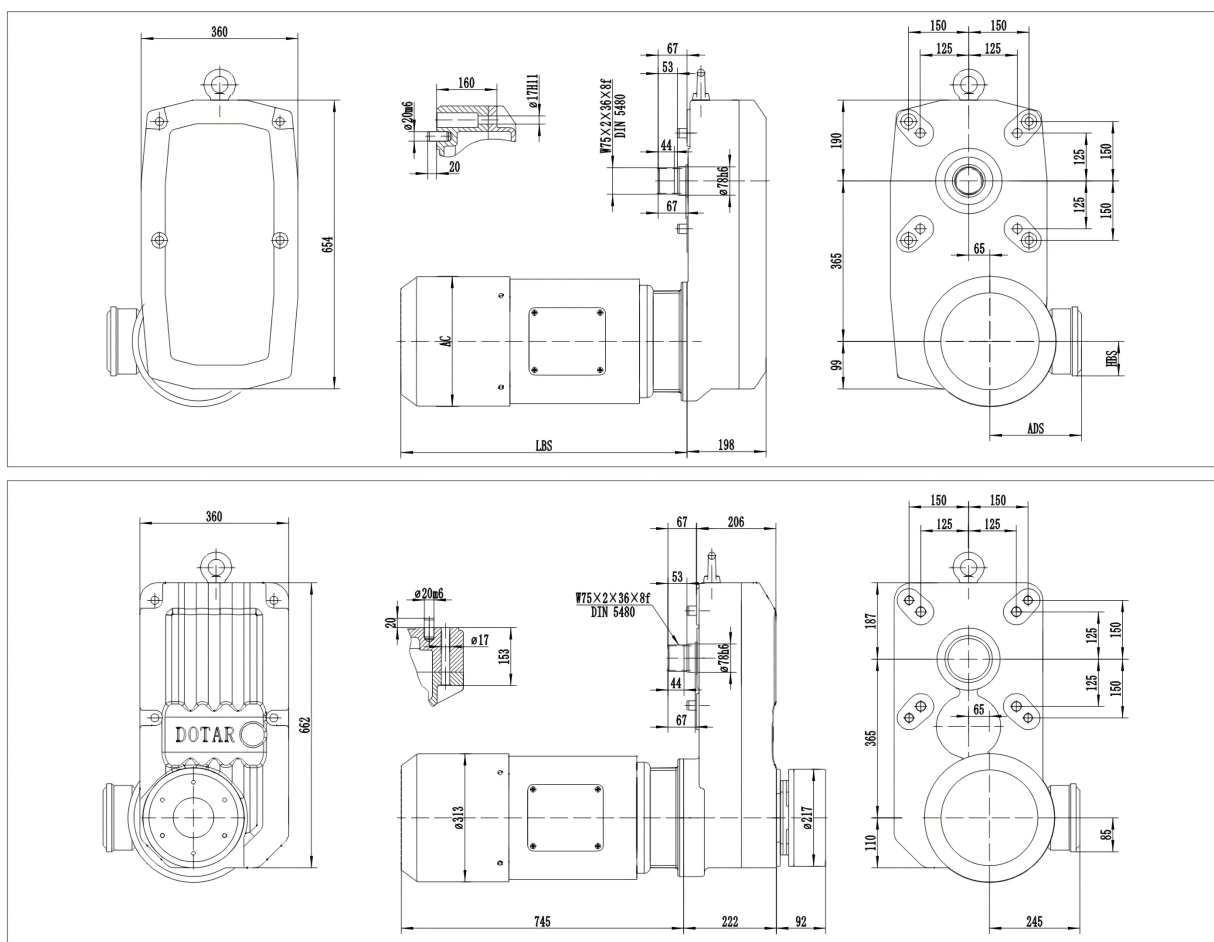


卷筒直径295mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW     | 频率Hz         | 减速比   | 扭矩<br>N.m | 型号                         | 电机<br>相关尺寸                                 |
|----|------|-----------------|-----------------------|----------------|--------------|-------|-----------|----------------------------|--------------------------------------------|
| 1  | 16   | M5/2m           | 0.66/4.0<br>(0.8/4.8) | 12.5<br>(15.0) | 100<br>(120) | 169   | 100       | DTQ(S)20000-169-YPEJ132L   | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 12.5 | M6/3m           |                       |                |              |       |           | -4-12.5kW-380V/100Hz       |                                            |
|    | 10   | M7/4m           |                       |                |              |       |           | DTQ(S)20000-169-YPEJ132L   |                                            |
|    | 8    | M7/4m           |                       |                |              |       |           | -4-15.0kW-380V/120Hz       |                                            |
| 2  | 20   | M4/1Am          | 0.66/4.0<br>(0.8/4.8) | 16.0<br>(19.2) | 100<br>(120) | 169   | 150       | DTQ(S)20000-169-YPEJ132L   | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 16   | M5/2m           |                       |                |              |       |           | -4-16.0kW-380V/100Hz       |                                            |
|    | 12.5 | M6/3m           |                       |                |              |       |           | DTQ(S)20000-169-YPEJ132L   |                                            |
|    | 10   | M7/4m           |                       |                |              |       |           | -4-19.2kW-380V/120Hz       |                                            |
| 3  | 16   | M4/1Am          | 0.8/5.0<br>(1.0/6.0)  | 16.0<br>(19.2) | 100<br>(120) | 132.9 | 150       | DTQ(S)20000-132.9-YPEJ132L | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 12.5 | M5/2m           |                       |                |              |       |           | -4-16.0kW-380V/100Hz       |                                            |
|    | 10   | M6/3m           |                       |                |              |       |           | DTQ(S)20000-132.9-YPEJ132L |                                            |
|    | 8    | M7/4m           |                       |                |              |       |           | -4-19.2kW-380V/120Hz       |                                            |
| 4  | 12.5 | M4/1Am          | 1.0/6.3<br>(1.2/7.6)  | 16.0<br>(19.2) | 100<br>(120) | 109.3 | 150       | DTQ(S)20000-109.3-YPEJ132L | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 10   | M5/2m           |                       |                |              |       |           | -4-16.0kW-380V/100Hz       |                                            |
|    | 8    | M6/3m           |                       |                |              |       |           | DTQ(S)20000-109.3-YPEJ132L |                                            |
|    | 6.3  | M7/4m           |                       |                |              |       |           | -4-19.2kW-380V/120Hz       |                                            |
| 5  | 10   | M4/1Am          | 1.3/8.0<br>(1.6/9.6)  | 16.0<br>(19.2) | 100<br>(120) | 85.1  | 150       | DTQ(S)20000-85.1-YPEJ132L  | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 8    | M5/2m           |                       |                |              |       |           | -4-16.0kW-380V/100Hz       |                                            |
|    | 6.3  | M6/3m           |                       |                |              |       |           | DTQ(S)20000-85.1-YPEJ132L  |                                            |
|    | 5    | M7/4m           |                       |                |              |       |           | -4-19.2kW-380V/120Hz       |                                            |

## DTQB(S)20000 Explosion-Proof Electric Hoist (Dual Brake) Variable Frequency Lifting Reducer

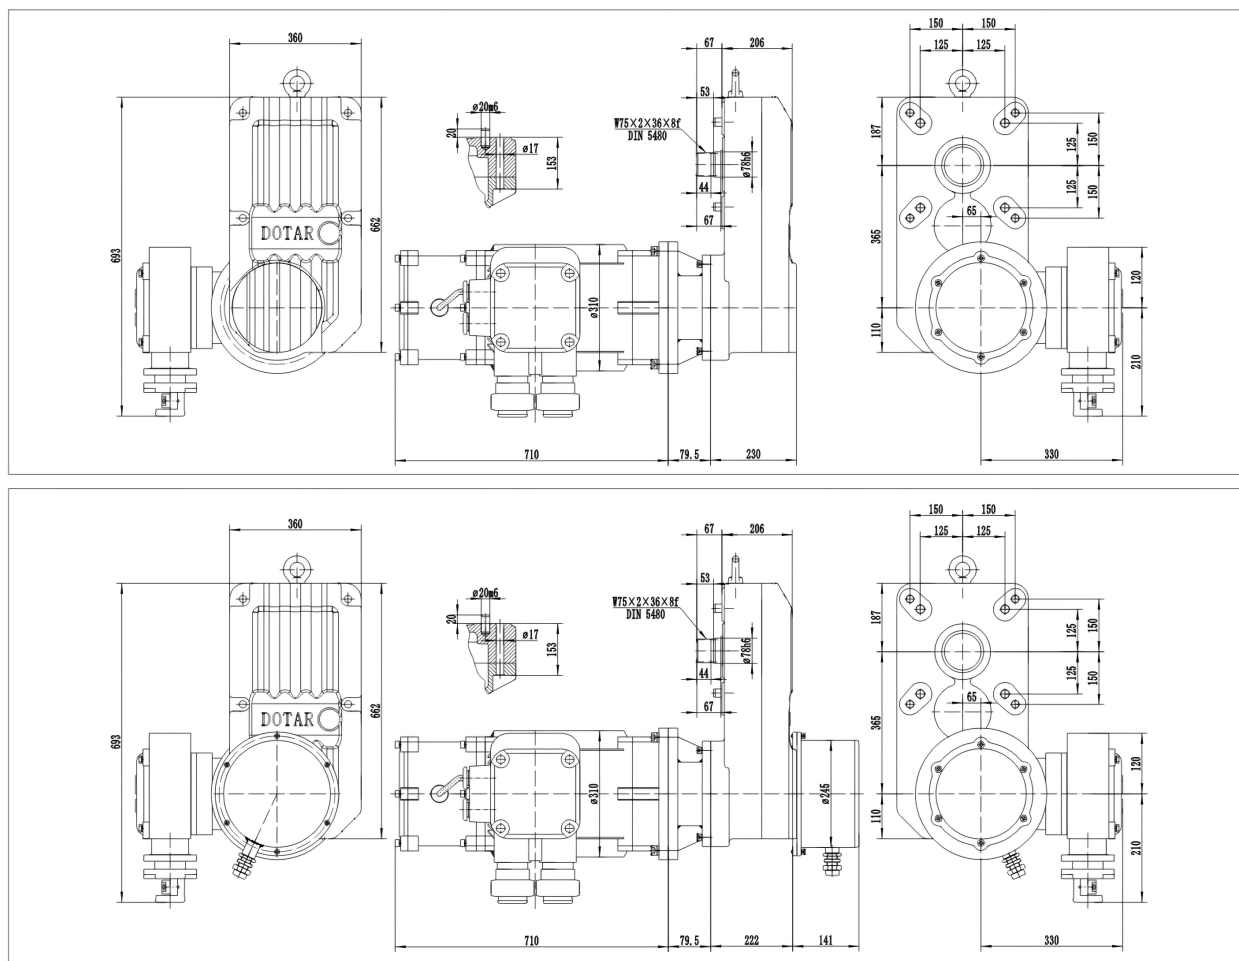



卷筒直径295mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min         | 电机功率<br>kW     | 频率Hz         | 减速比   | 扭矩<br>N.m | 型号                           |
|----|------|-----------------|-----------------------|----------------|--------------|-------|-----------|------------------------------|
| 1  | 16   | M5/2m           | 0.66/4.0<br>(0.8/4.8) | 12.5<br>(15.0) | 100<br>(120) | 169   | 100       | DTQB(S)20000-169-YBZPE132L   |
|    | 12.5 | M6/3m           |                       |                |              |       |           | -4-12.5kW-380V/100Hz         |
|    | 10   | M7/4m           |                       |                |              |       |           | DTQB(S)20000-169-YBZPE132L   |
|    | 8    | M7/4m           |                       |                |              |       |           | -4-15.0kW-380V/120Hz         |
| 2  | 20   | M4/1Am          | 0.66/4.0<br>(0.8/4.8) | 16.0<br>(19.2) | 100<br>(120) | 169   | 150       | DTQB(S)20000-169-YBZPE132L   |
|    | 16   | M5/2m           |                       |                |              |       |           | -4-16.0kW-380V/100Hz         |
|    | 12.5 | M6/3m           |                       |                |              |       |           | DTQB(S)20000-169-YBZPE132L   |
|    | 10   | M7/4m           |                       |                |              |       |           | -4-19.2kW-380V/120Hz         |
| 3  | 16   | M4/1Am          | 0.8/5.0<br>(1.0/6.0)  | 16.0<br>(19.2) | 100<br>(120) | 132.9 | 150       | DTQB(S)20000-132.9-YBZPE132L |
|    | 12.5 | M5/2m           |                       |                |              |       |           | -4-16.0kW-380V/100Hz         |
|    | 10   | M6/3m           |                       |                |              |       |           | DTQB(S)20000-132.9-YBZPE132L |
|    | 8    | M7/4m           |                       |                |              |       |           | -4-19.2kW-380V/120Hz         |
| 4  | 12.5 | M4/1Am          | 1.0/6.3<br>(1.2/7.6)  | 16.0<br>(19.2) | 100<br>(120) | 109.3 | 150       | DTQB(S)20000-109.3-YBZPE132L |
|    | 10   | M5/2m           |                       |                |              |       |           | -4-16.0kW-380V/100Hz         |
|    | 8    | M6/3m           |                       |                |              |       |           | DTQB(S)20000-109.3-YBZPE132L |
|    | 6.3  | M7/4m           |                       |                |              |       |           | -4-19.2kW-380V/120Hz         |
| 5  | 10   | M4/1Am          | 1.3/8.0<br>(1.6/9.6)  | 16.0<br>(19.2) | 100<br>(120) | 85.1  | 150       | DTQB(S)20000-85.1-YBZPE132L  |
|    | 8    | M5/2m           |                       |                |              |       |           | -4-16.0kW-380V/100Hz         |
|    | 6.3  | M6/3m           |                       |                |              |       |           | DTQB(S)20000-85.1-YBZPE132L  |
|    | 5    | M7/4m           |                       |                |              |       |           | -4-19.2kW-380V/120Hz         |



# DTQ(S)25000 Electric Hoist (Dual Brake) Two-Speed Lifting Reducer

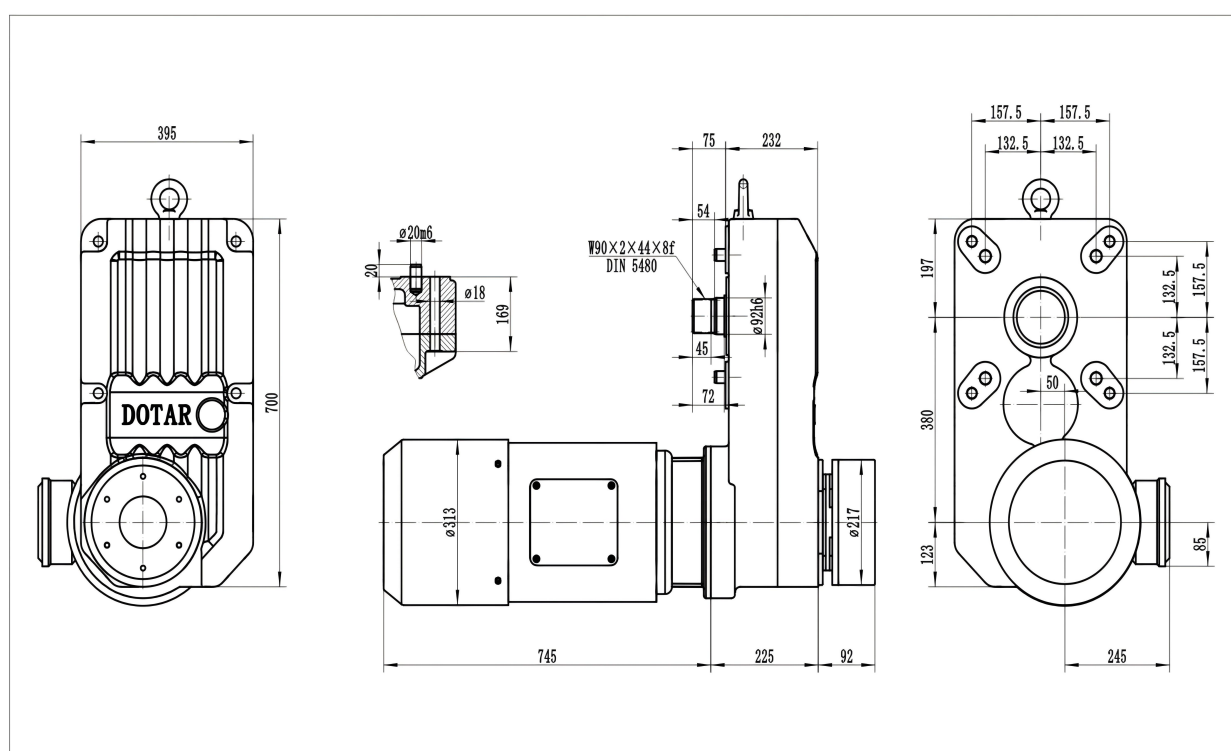
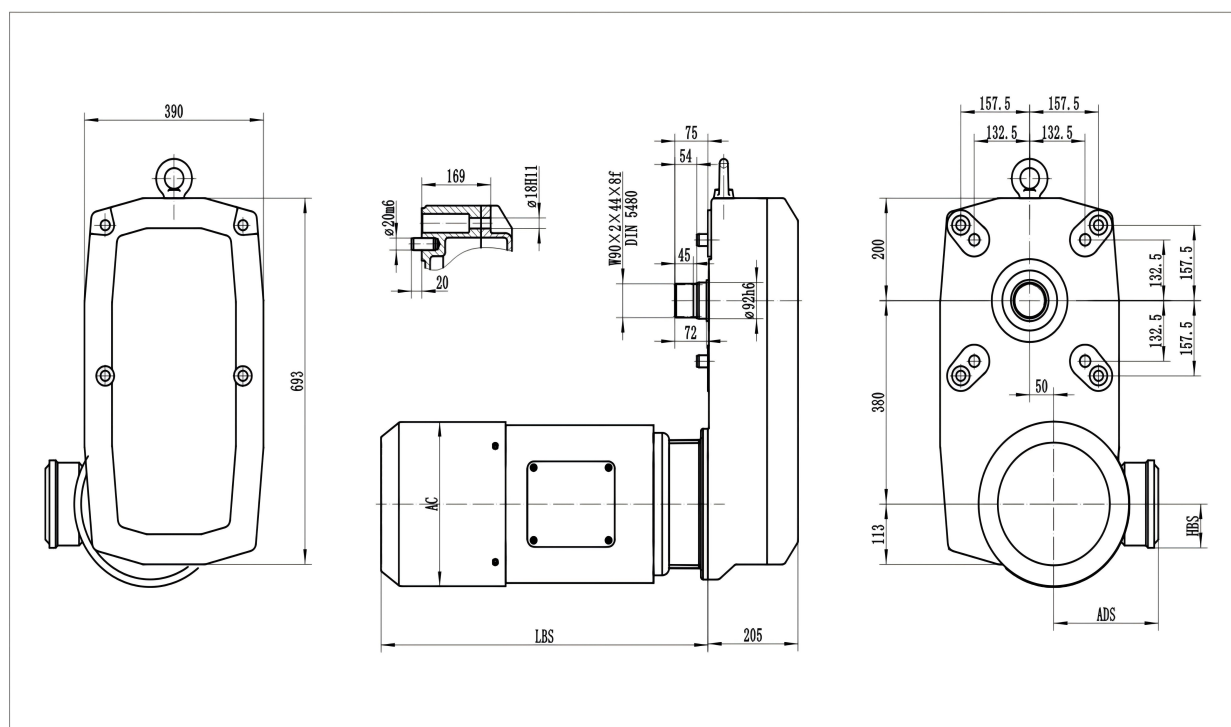


卷筒直径325mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min          | 电机功率<br>kW             | 频率Hz       | 减速比    | 扭矩<br>N.m | 型号                                                       | 电机<br>相关尺寸                                   |
|----|------|-----------------|------------------------|------------------------|------------|--------|-----------|----------------------------------------------------------|----------------------------------------------|
| 1  | 20   | M4/1Am          | 0.53/3.4<br>(0.63/4.1) | 2.0/12.5<br>(2.4/15.0) | 50<br>(60) | 217.6  | 100       | DTQ(S)25000-217.6-YEJ132L<br>-12/2-2.0/12.5kW-380V/50Hz  | AC: 270<br>LBS: 619<br>ADS: 190<br>HBS: 84   |
|    | 16   | M5/2m           |                        |                        |            |        |           |                                                          |                                              |
|    | 12.5 | M6/3m           |                        |                        |            |        |           |                                                          |                                              |
|    | 10   | M7/4m           |                        |                        |            |        |           |                                                          |                                              |
| 2  | 16   | M4/1Am          | 0.6/4.0<br>(0.8/4.8)   | 2.0/12.5<br>(2.4/15.0) | 50<br>(60) | 183    | 100       | DTQ(S)25000-183-YEJ132L<br>-12/2-2.0/12.5kW-380V/50Hz    | AC: 270<br>LBS: 619<br>ADS: 190<br>HBS: 84   |
|    | 12.5 | M5/2m           |                        |                        |            |        |           |                                                          |                                              |
|    | 10   | M6/3m           |                        |                        |            |        |           |                                                          |                                              |
|    | 8    | M7/4m           |                        |                        |            |        |           |                                                          |                                              |
| 3  | 12.5 | M4/1Am          | 0.8/5.0<br>(1.0/6.0)   | 2.0/12.5<br>(2.4/15.0) | 50<br>(60) | 149.61 | 100       | DTQ(S)25000-149.61-YEJ132L<br>-12/2-2.0/12.5kW-380V/50Hz | AC: 270<br>LBS: 619<br>ADS: 190<br>HBS: 84   |
|    | 10   | M5/2m           |                        |                        |            |        |           |                                                          |                                              |
|    | 8    | M6/3m           |                        |                        |            |        |           |                                                          |                                              |
|    | 6.3  | M7/4m           |                        |                        |            |        |           |                                                          |                                              |
| 4  | 10   | M4/1Am          | 1.03/6.7<br>(1.24/8.1) | 2.0/12.5<br>(2.4/15.0) | 50<br>(60) | 110.64 | 100       | DTQ(S)25000-110.64-YEJ132L<br>-12/2-2.0/12.5kW-380V/50Hz | AC: 270<br>LBS: 619<br>ADS: 190<br>HBS: 84   |
|    | 8    | M5/2m           |                        |                        |            |        |           |                                                          |                                              |
|    | 6.3  | M6/3m           |                        |                        |            |        |           |                                                          |                                              |
|    | 5    | M7/4m           |                        |                        |            |        |           |                                                          |                                              |
| 5  | 25   | M4/1Am          | 0.53/3.4<br>(0.63/4.1) | 2.6/16.0<br>(3.2/19.2) | 50<br>(60) | 217.6  | 150       | DTQ(S)25000-217.6-YEJ160L<br>-12/2-2.6/16.0kW-380V/50Hz  | AC: 313<br>LBS: 666<br>ADS: 234.5<br>HBS: 84 |
|    | 20   | M5/2m           |                        |                        |            |        |           |                                                          |                                              |
|    | 16   | M6/3m           |                        |                        |            |        |           |                                                          |                                              |
|    | 12.5 | M7/4m           |                        |                        |            |        |           |                                                          |                                              |
| 6  | 20   | M4/1Am          | 0.6/4.0<br>(0.8/4.8)   | 2.6/16.0<br>(3.2/19.2) | 50<br>(60) | 183    | 150       | DTQ(S)25000-183-YEJ160L<br>-12/2-2.6/16.0kW-380V/50Hz    | AC: 313<br>LBS: 666<br>ADS: 234.5<br>HBS: 84 |
|    | 16   | M5/2m           |                        |                        |            |        |           |                                                          |                                              |
|    | 12.5 | M6/3m           |                        |                        |            |        |           |                                                          |                                              |
|    | 10   | M7/4m           |                        |                        |            |        |           |                                                          |                                              |
| 7  | 16   | M4/1Am          | 0.8/5.0<br>(1.0/6.0)   | 2.6/16.0<br>(3.2/19.2) | 50<br>(60) | 149.61 | 150       | DTQ(S)25000-149.61-YEJ160L<br>-12/2-2.6/16.0kW-380V/50Hz | AC: 313<br>LBS: 666<br>ADS: 234.5<br>HBS: 84 |
|    | 12.5 | M5/2m           |                        |                        |            |        |           |                                                          |                                              |
|    | 10   | M6/3m           |                        |                        |            |        |           |                                                          |                                              |
|    | 8    | M7/4m           |                        |                        |            |        |           |                                                          |                                              |
| 8  | 12.5 | M4/1Am          | 1.03/6.7<br>(1.24/8.1) | 2.6/16.0<br>(3.2/19.2) | 50<br>(60) | 110.64 | 150       | DTQ(S)25000-110.64-YEJ160L<br>-12/2-2.6/16.0kW-380V/50Hz | AC: 313<br>LBS: 666<br>ADS: 234.5<br>HBS: 84 |
|    | 10   | M5/2m           |                        |                        |            |        |           |                                                          |                                              |
|    | 8    | M6/3m           |                        |                        |            |        |           |                                                          |                                              |
|    | 6.3  | M7/4m           |                        |                        |            |        |           |                                                          |                                              |

# DTQ(S)25000 Electric Hoist (Dual Brake) Variable Frequency Lifting Reducer

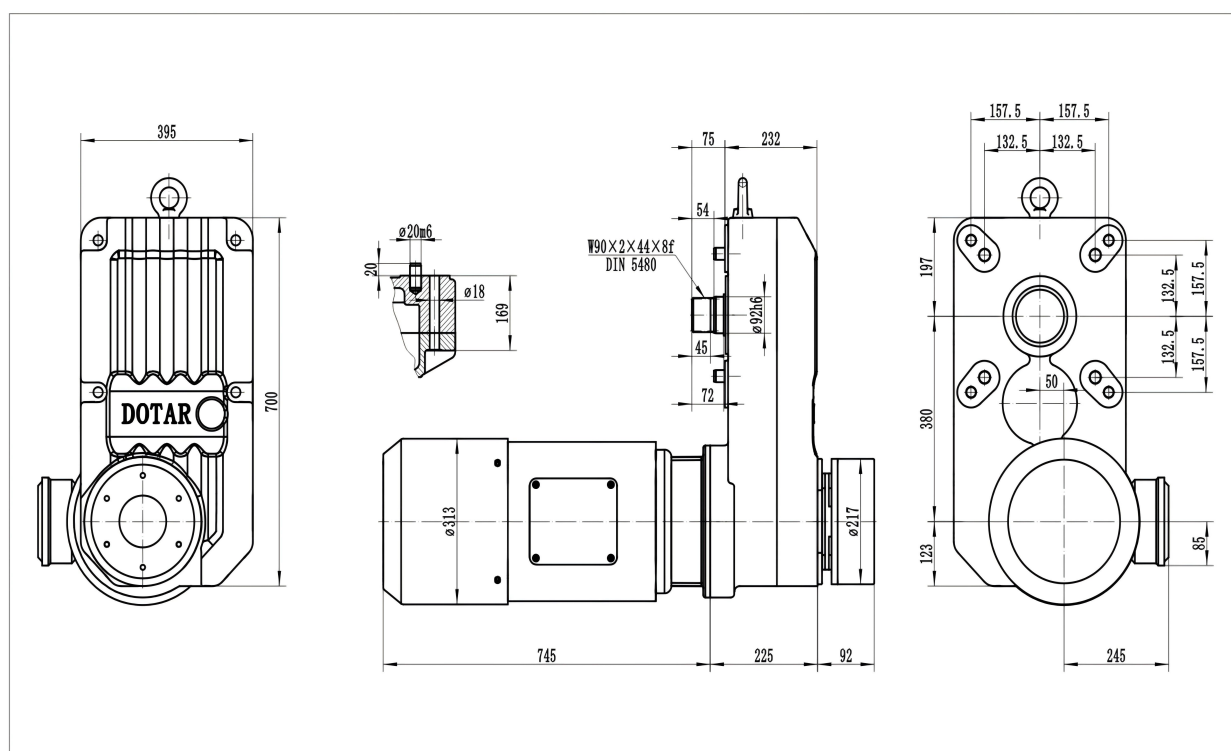
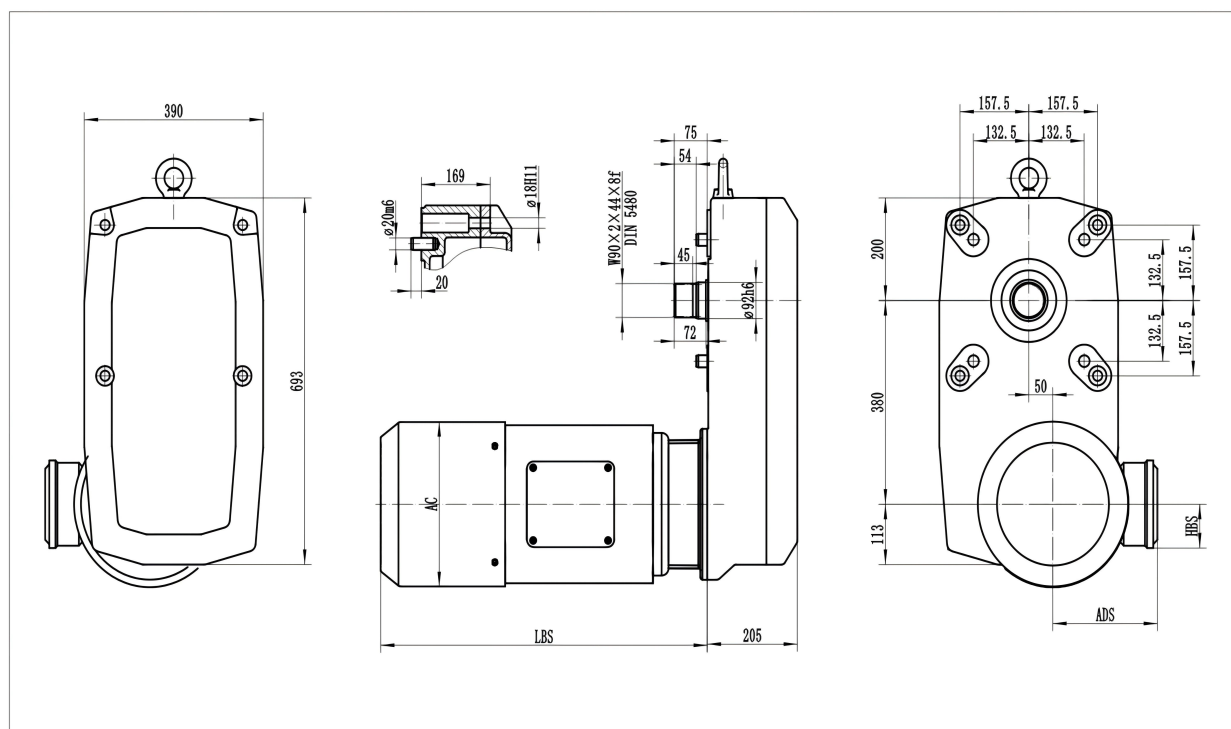


卷筒直径325mm 滑轮倍率4/1 带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min          | 电机功率<br>kW     | 频率Hz         | 减速比    | 扭矩<br>N.m | 型号                                                  | 电机<br>相关尺寸                                 |
|----|------|-----------------|------------------------|----------------|--------------|--------|-----------|-----------------------------------------------------|--------------------------------------------|
| 1  | 20   | M4/1Am          | 0.53-3.4<br>(0.63-4.1) | 12.5<br>(15.0) | 100<br>(120) | 217.6  | 100       | DTQ(S)25000-217.6-YPEJ132L<br>-4-12.5kW-380V/100Hz  | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 16   | M5/2m           |                        |                |              |        |           |                                                     |                                            |
|    | 12.5 | M6/3m           |                        |                |              |        |           | DTQ(S)25000-217.6-YPEJ132L<br>-4-15.0kW-380V/120Hz  |                                            |
|    | 10   | M7/4m           |                        |                |              |        |           |                                                     |                                            |
| 2  | 16   | M4/1Am          | 0.6-4.0<br>(0.8-4.8)   | 12.5<br>(15.0) | 100<br>(120) | 183    | 100       | DTQ(S)25000-183-YPEJ132L<br>-4-12.5kW-380V/100Hz    | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 12.5 | M5/2m           |                        |                |              |        |           |                                                     |                                            |
|    | 10   | M6/3m           |                        |                |              |        |           | DTQ(S)25000-183-YPEJ132L<br>-4-15.0kW-380V/120Hz    |                                            |
|    | 8    | M7/4m           |                        |                |              |        |           |                                                     |                                            |
| 3  | 12.5 | M4/1Am          | 0.8-5.0<br>(1.0-6.0)   | 12.5<br>(15.0) | 100<br>(120) | 149.61 | 100       | DTQ(S)25000-149.61-YPEJ132L<br>-4-12.5kW-380V/100Hz | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 10   | M5/2m           |                        |                |              |        |           |                                                     |                                            |
|    | 8    | M6/3m           |                        |                |              |        |           | DTQ(S)25000-149.61-YPEJ132L<br>-4-15.0kW-380V/120Hz |                                            |
|    | 6.3  | M7/4m           |                        |                |              |        |           |                                                     |                                            |
| 4  | 10   | M4/1Am          | 1.03-6.7<br>(1.24-8.1) | 12.5<br>(15.0) | 100<br>(120) | 110.64 | 100       | DTQ(S)25000-110.64-YPEJ132L<br>-4-12.5kW-380V/100Hz | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 8    | M5/2m           |                        |                |              |        |           |                                                     |                                            |
|    | 6.3  | M6/3m           |                        |                |              |        |           | DTQ(S)25000-110.64-YPEJ132L<br>-4-15.0kW-380V/120Hz |                                            |
|    | 5    | M7/4m           |                        |                |              |        |           |                                                     |                                            |
| 5  | 25   | M4/1Am          | 0.53-3.4<br>(0.63-4.1) | 16.0<br>(19.2) | 100<br>(120) | 217.6  | 150       | DTQ(S)25000-217.6-YPEJ132L<br>-4-16.0kW-380V/100Hz  | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 20   | M5/2m           |                        |                |              |        |           |                                                     |                                            |
|    | 16   | M6/3m           |                        |                |              |        |           | DTQ(S)25000-217.6-YPEJ132L<br>-4-19.2kW-380V/120Hz  |                                            |
|    | 12.5 | M7/4m           |                        |                |              |        |           |                                                     |                                            |
| 6  | 20   | M4/1Am          | 0.6-4.0<br>(0.8-4.8)   | 16.0<br>(19.2) | 100<br>(120) | 183    | 150       | DTQ(S)25000-183-YPEJ132L<br>-4-16.0kW-380V/100Hz    | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 16   | M5/2m           |                        |                |              |        |           |                                                     |                                            |
|    | 12.5 | M6/3m           |                        |                |              |        |           | DTQ(S)25000-183-YPEJ132L<br>-4-19.2kW-380V/120Hz    |                                            |
|    | 10   | M7/4m           |                        |                |              |        |           |                                                     |                                            |
| 7  | 16   | M4/1Am          | 0.8-5.0<br>(1.0-6.0)   | 16.0<br>(19.2) | 100<br>(120) | 149.61 | 150       | DTQ(S)25000-149.61-YPEJ132L<br>-4-16.0kW-380V/100Hz | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 12.5 | M5/2m           |                        |                |              |        |           |                                                     |                                            |
|    | 10   | M6/3m           |                        |                |              |        |           | DTQ(S)25000-149.61-YPEJ132L<br>-4-19.2kW-380V/120Hz |                                            |
|    | 8    | M7/4m           |                        |                |              |        |           |                                                     |                                            |
| 8  | 12.5 | M4/1Am          | 1.03-6.7<br>(1.24-8.1) | 16.0<br>(19.2) | 100<br>(120) | 110.64 | 150       | DTQ(S)25000-110.64-YPEJ132L<br>-4-16.0kW-380V/100Hz | AC: 270<br>LBS: 549<br>ADS: 190<br>HBS: 84 |
|    | 10   | M5/2m           |                        |                |              |        |           |                                                     |                                            |
|    | 8    | M6/3m           |                        |                |              |        |           | DTQ(S)25000-110.64-YPEJ132L<br>-4-19.2kW-380V/120Hz |                                            |
|    | 6.3  | M7/4m           |                        |                |              |        |           |                                                     |                                            |



# DTQB(S)25000 Explosion-Proof Electric Hoist (Dual Brake) Variable Frequency Lifting Reducer

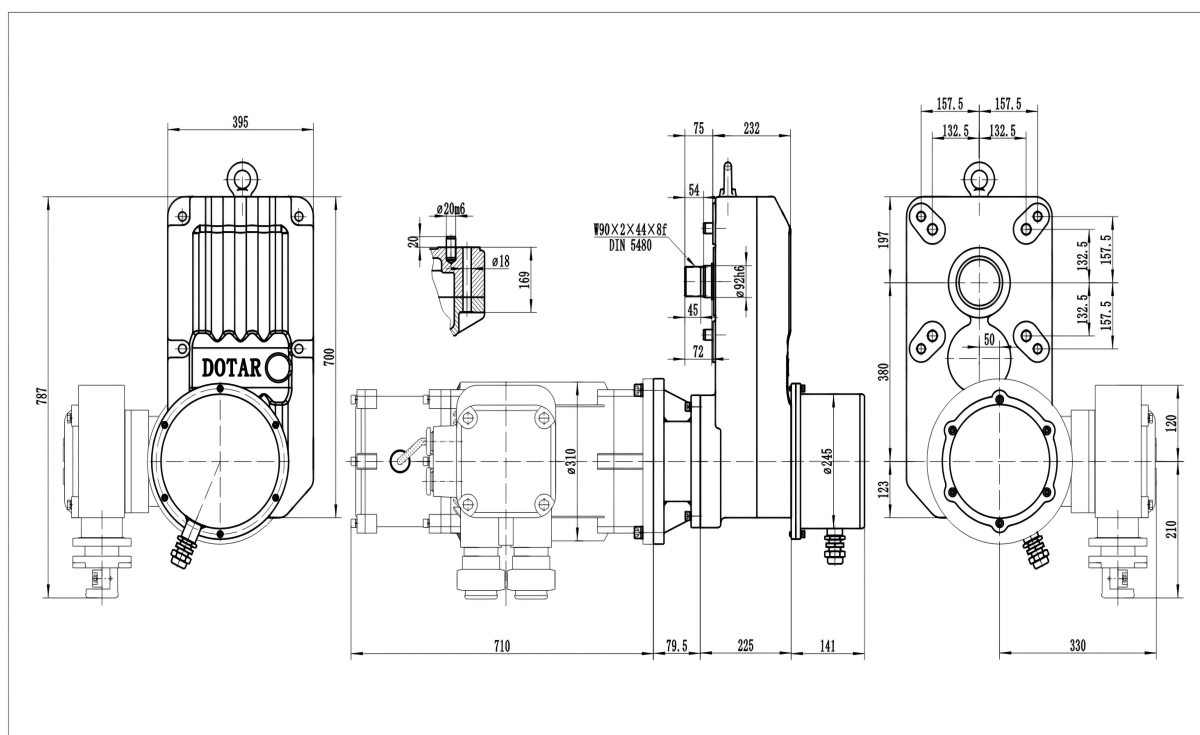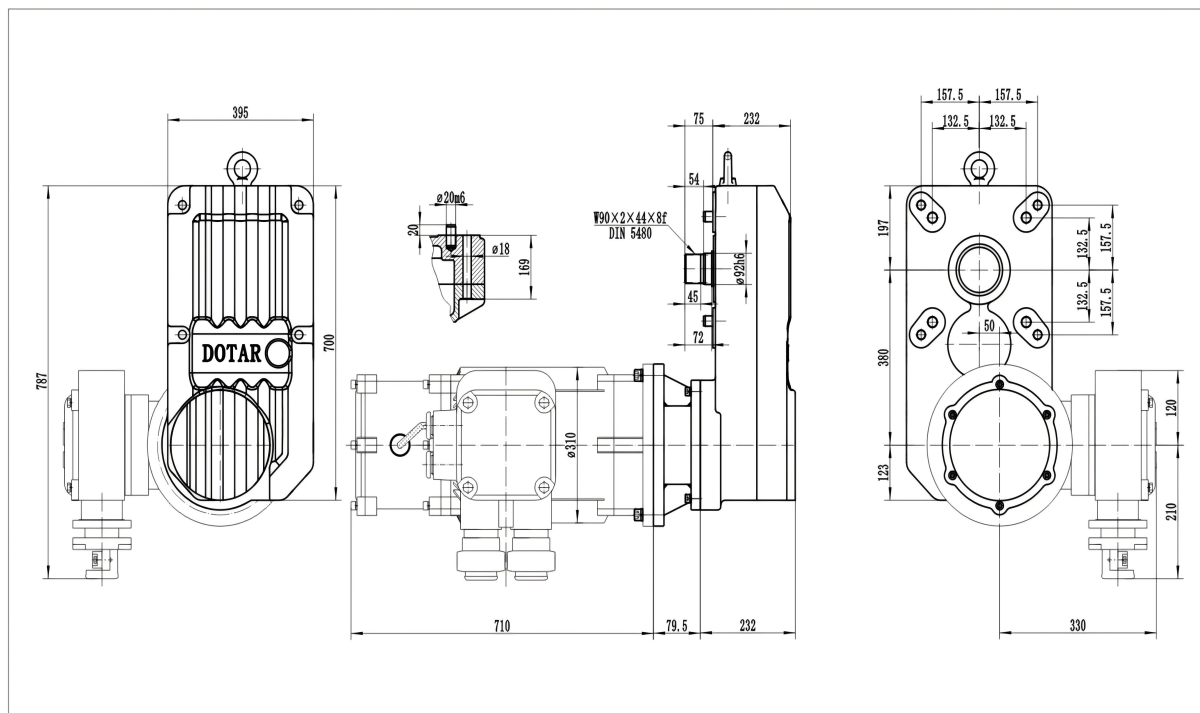


卷筒直径325mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min          | 电机功率<br>kW     | 频率Hz         | 减速比    | 扭矩<br>N.m | 型号                                                    |
|----|------|-----------------|------------------------|----------------|--------------|--------|-----------|-------------------------------------------------------|
| 1  | 20   | M4/1Am          | 0.53-3.4<br>(0.63-4.1) | 12.5<br>(15.0) | 100<br>(120) | 217.6  | 100       | DTQB(S)25000-217.6-YBZPE132L<br>-4-12.5kW-380V/100Hz  |
|    | 16   | M5/2m           |                        |                |              |        |           | DTQB(S)25000-217.6-YBZPE132L<br>-4-15.0kW-380V/120Hz  |
|    | 12.5 | M6/3m           |                        |                |              |        |           |                                                       |
|    | 10   | M7/4m           |                        |                |              |        |           |                                                       |
| 2  | 16   | M4/1Am          | 0.6-4.0<br>(0.8-4.8)   | 12.5<br>(15.0) | 100<br>(120) | 183    | 100       | DTQB(S)25000-183-YBZPE132L<br>-4-12.5kW-380V/100Hz    |
|    | 12.5 | M5/2m           |                        |                |              |        |           | DTQB(S)25000-183-YBZPE132L<br>-4-15.0kW-380V/120Hz    |
|    | 10   | M6/3m           |                        |                |              |        |           |                                                       |
|    | 8    | M7/4m           |                        |                |              |        |           |                                                       |
| 3  | 12.5 | M4/1Am          | 0.8-5.0<br>(1.0-6.0)   | 12.5<br>(15.0) | 100<br>(120) | 149.61 | 100       | DTQB(S)25000-149.61-YBZPE132L<br>-4-12.5kW-380V/100Hz |
|    | 10   | M5/2m           |                        |                |              |        |           | DTQB(S)25000-149.61-YBZPE132L<br>-4-15.0kW-380V/120Hz |
|    | 8    | M6/3m           |                        |                |              |        |           |                                                       |
|    | 6.3  | M7/4m           |                        |                |              |        |           |                                                       |
| 4  | 10   | M4/1Am          | 1.03-6.7<br>(1.24-8.1) | 12.5<br>(15.0) | 100<br>(120) | 110.64 | 100       | DTQB(S)25000-110.64-YBZPE132L<br>-4-12.5kW-380V/100Hz |
|    | 8    | M5/2m           |                        |                |              |        |           | DTQB(S)25000-110.64-YBZPE132L<br>-4-15.0kW-380V/120Hz |
|    | 6.3  | M6/3m           |                        |                |              |        |           |                                                       |
|    | 5    | M7/4m           |                        |                |              |        |           |                                                       |
| 5  | 25   | M4/1Am          | 0.53-3.4<br>(0.63-4.1) | 16.0<br>(19.2) | 100<br>(120) | 217.6  | 150       | DTQB(S)25000-217.6-YBZPE132L<br>-4-16.0kW-380V/100Hz  |
|    | 20   | M5/2m           |                        |                |              |        |           | DTQB(S)25000-217.6-YBZPE132L<br>-4-19.2kW-380V/120Hz  |
|    | 16   | M6/3m           |                        |                |              |        |           |                                                       |
|    | 12.5 | M7/4m           |                        |                |              |        |           |                                                       |
| 6  | 20   | M4/1Am          | 0.6-4.0<br>(0.8-4.8)   | 16.0<br>(19.2) | 100<br>(120) | 183    | 150       | DTQB(S)25000-183-YBZPE132L<br>-4-16.0kW-380V/100Hz    |
|    | 16   | M5/2m           |                        |                |              |        |           | DTQB(S)25000-183-YBZPE132L<br>-4-19.2kW-380V/120Hz    |
|    | 12.5 | M6/3m           |                        |                |              |        |           |                                                       |
|    | 10   | M7/4m           |                        |                |              |        |           |                                                       |
| 7  | 16   | M4/1Am          | 0.8-5.0<br>(1.0-6.0)   | 16.0<br>(19.2) | 100<br>(120) | 149.61 | 150       | DTQB(S)25000-149.61-YBZPE132L<br>-4-16.0kW-380V/100Hz |
|    | 12.5 | M5/2m           |                        |                |              |        |           | DTQB(S)25000-149.61-YBZPE132L<br>-4-19.2kW-380V/120Hz |
|    | 10   | M6/3m           |                        |                |              |        |           |                                                       |
|    | 8    | M7/4m           |                        |                |              |        |           |                                                       |
| 8  | 12.5 | M4/1Am          | 1.03-6.7<br>(1.24-8.1) | 16.0<br>(19.2) | 100<br>(120) | 110.64 | 150       | DTQB(S)25000-110.64-YBZPE132L<br>-4-16.0kW-380V/100Hz |
|    | 10   | M5/2m           |                        |                |              |        |           | DTQB(S)25000-110.64-YBZPE132L<br>-4-19.2kW-380V/120Hz |
|    | 8    | M6/3m           |                        |                |              |        |           |                                                       |
|    | 6.3  | M7/4m           |                        |                |              |        |           |                                                       |

## DTQ(S)40000 Electric Hoist (Dual Brake) Two-Speed Lifting Reducer

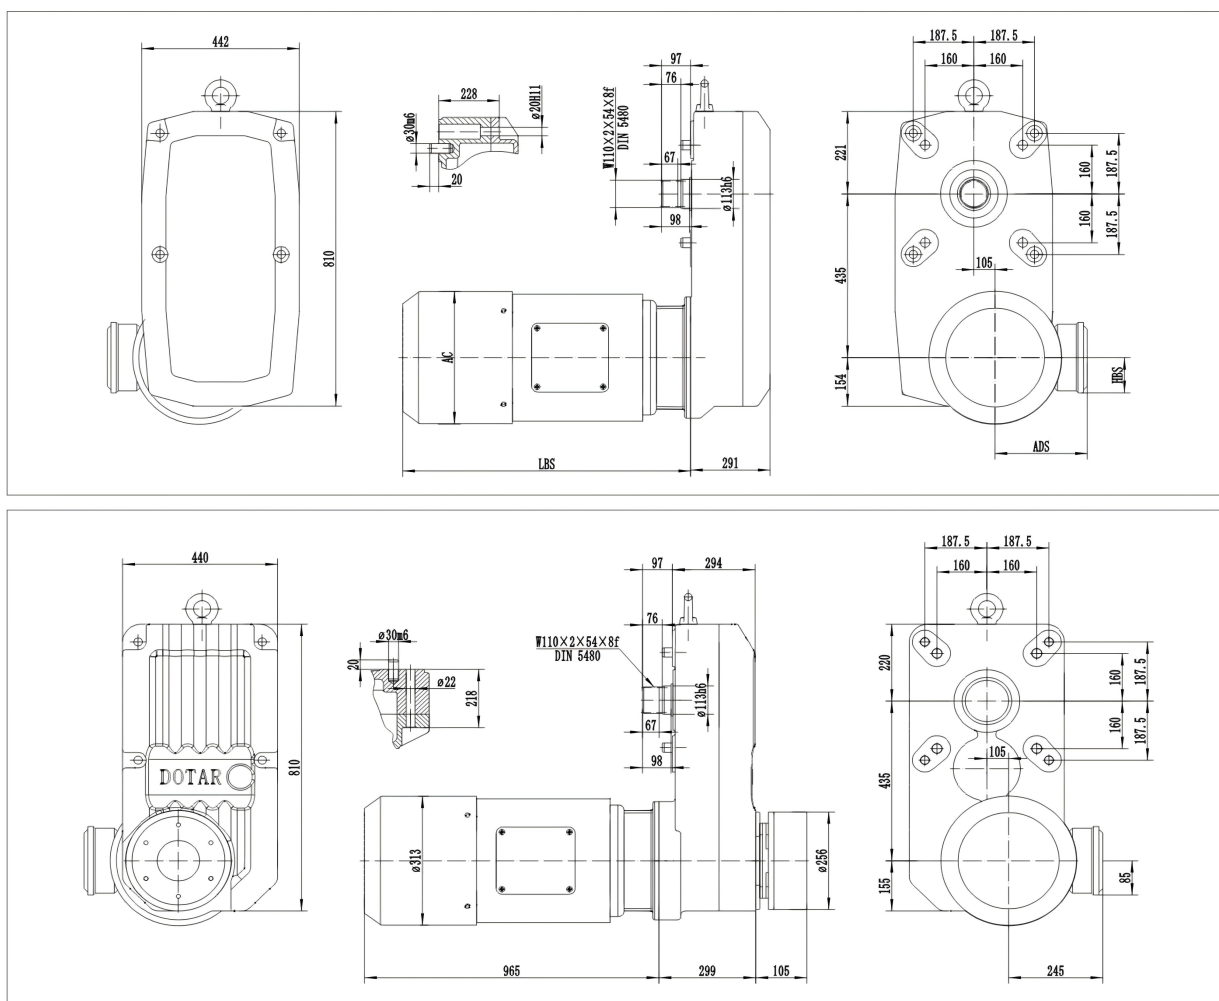


卷筒直径405mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min        | 电机功率<br>kW       | 频率Hz       | 减速比   | 扭矩<br>N.m | 型号                        | 电机<br>相关尺寸                                   |
|----|------|-----------------|----------------------|------------------|------------|-------|-----------|---------------------------|----------------------------------------------|
| 1  | 40   | M4/1Am          | 0.6/2.6<br>(0.8/3.2) | 5/20<br>(6/24.2) | 50<br>(60) | 232.3 | 150       | DTQ(S)40000-232.3-YEJ160L | AC: 313<br>LBS: 725<br>ADS: 234.5<br>HBS: 84 |
|    | 32   | M5/2m           |                      |                  |            |       |           | -8/2-5/20kW-380V/50Hz     |                                              |
|    | 25   | M6/3m           |                      |                  |            |       |           | DTQ(S)40000-232.3-YEJ160L |                                              |
|    | 20   | M7/4m           |                      |                  |            |       |           | -8/2-6/24.2kW-380V/60Hz   |                                              |
| 2  | 32   | M5/2m           | 0.8/3.3<br>(1.0/4.0) | 5/20<br>(6/24.2) | 50<br>(60) | 182.8 | 150       | DTQ(S)40000-182.8-YEJ160L | AC: 313<br>LBS: 725<br>ADS: 234.5<br>HBS: 84 |
|    | 25   | M6/3m           |                      |                  |            |       |           | -8/2-5/20kW-380V/50Hz     |                                              |
|    | 20   | M7/4m           |                      |                  |            |       |           | DTQ(S)40000-182.8-YEJ160L |                                              |
|    | 16   | M7/4m           |                      |                  |            |       |           | -8/2-6/24.2kW-380V/60Hz   |                                              |
| 3  | 25   | M5/2m           | 1.0/4.2<br>(1.3/5.1) | 5/20<br>(6/24.2) | 50<br>(60) | 144   | 150       | DTQ(S)40000-144-YEJ160L   | AC: 313<br>LBS: 725<br>ADS: 234.5<br>HBS: 84 |
|    | 20   | M6/3m           |                      |                  |            |       |           | -8/2-5/20kW-380V/50Hz     |                                              |
|    | 16   | M7/4m           |                      |                  |            |       |           | DTQ(S)40000-144-YEJ160L   |                                              |
|    | 12.5 | M7/4m           |                      |                  |            |       |           | -8/2-6/24.2kW-380V/60Hz   |                                              |

## DTQ(S)40000 Electric Hoist (Dual Brake) Variable Frequency Lifting Reducer

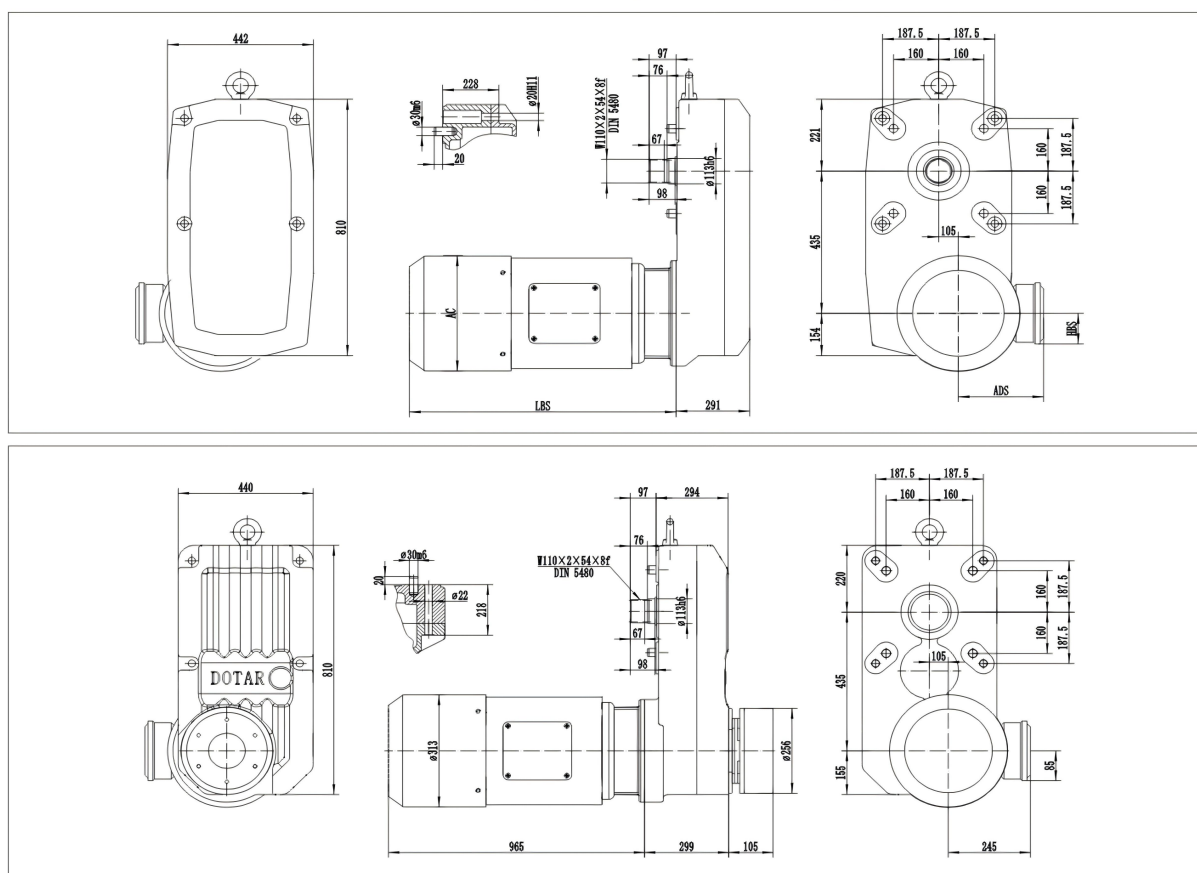

卷筒直径405mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min | 电机功率<br>kW | 频率Hz | 减速比   | 扭矩<br>N.m | 型号                                            | 电机<br>相关尺寸                                   |
|----|------|-----------------|---------------|------------|------|-------|-----------|-----------------------------------------------|----------------------------------------------|
| 1  | 40   | M4/1Am          | 0.82-4.9      | 38         | 75   | 144   | 350       | DTQ(S)40000-144-YPEJ160L<br>-4-38kW-380V/75Hz | AC: 313<br>LBS: 885<br>ADS: 234.5<br>HBS: 84 |
|    | 32   | M5/2m           |               |            |      |       |           |                                               |                                              |
|    | 25   | M6/3m           |               |            |      |       |           |                                               |                                              |
|    | 20   | M7/4m           |               |            |      |       |           |                                               |                                              |
| 2  | 32   | M5/2m           | 1.03-6.2      | 38         | 75   | 113.3 | 350       | DTQ(S)40000-144-YPEJ160L<br>-4-38kW-380V/75Hz | AC: 313<br>LBS: 885<br>ADS: 234.5<br>HBS: 84 |
|    | 25   | M6/3m           |               |            |      |       |           |                                               |                                              |
|    | 20   | M7/4m           |               |            |      |       |           |                                               |                                              |
|    | 16   | M7/4m           |               |            |      |       |           |                                               |                                              |
| 3  | 25   | M5/2m           | 1.26-7.6      | 38         | 75   | 92.2  | 350       | DTQ(S)40000-144-YPEJ160L<br>-4-38kW-380V/75Hz | AC: 313<br>LBS: 885<br>ADS: 234.5<br>HBS: 84 |
|    | 20   | M6/3m           |               |            |      |       |           |                                               |                                              |
|    | 16   | M7/4m           |               |            |      |       |           |                                               |                                              |
|    | 12.5 | M7/4m           |               |            |      |       |           |                                               |                                              |

卷筒直径405mm 滑轮倍率6/1


|   |    |        |          |    |    |       |     |                                                 |                                              |
|---|----|--------|----------|----|----|-------|-----|-------------------------------------------------|----------------------------------------------|
| 4 | 63 | M4/1Am | 0.53-3.2 | 38 | 75 | 144   | 350 | DTQ(S)40000-144-YPEJ160L<br>-4-38kW-380V/75Hz   | AC: 313<br>LBS: 885<br>ADS: 234.5<br>HBS: 84 |
|   | 50 | M5/2m  |          |    |    |       |     |                                                 |                                              |
|   | 40 | M6/3m  |          |    |    |       |     |                                                 |                                              |
|   | 32 | M7/4m  |          |    |    |       |     |                                                 |                                              |
| 5 | 50 | M4/1Am | 0.68-4.1 | 38 | 75 | 113.3 | 350 | DTQ(S)40000-113.3-YPEJ160L<br>-4-38kW-380V/75Hz | AC: 313<br>LBS: 885<br>ADS: 234.5<br>HBS: 84 |
|   | 40 | M5/2m  |          |    |    |       |     |                                                 |                                              |
|   | 32 | M6/3m  |          |    |    |       |     |                                                 |                                              |
|   | 25 | M7/4m  |          |    |    |       |     |                                                 |                                              |

卷筒直径405mm 滑轮倍率8/1

|   |    |        |         |    |    |     |     |                                               |                                              |
|---|----|--------|---------|----|----|-----|-----|-----------------------------------------------|----------------------------------------------|
| 6 | 80 | M4/1Am | 0.4-2.4 | 38 | 75 | 144 | 350 | DTQ(S)40000-144-YPEJ160L<br>-4-38kW-380V/75Hz | AC: 313<br>LBS: 885<br>ADS: 234.5<br>HBS: 84 |
|   | 63 | M5/2m  |         |    |    |     |     |                                               |                                              |
|   | 50 | M6/3m  |         |    |    |     |     |                                               |                                              |
|   | 40 | M7/4m  |         |    |    |     |     |                                               |                                              |



## DTQB(S)40000 Explosion-Proof Electric Hoist (Dual Brake) Variable Frequency Lifting Reducer

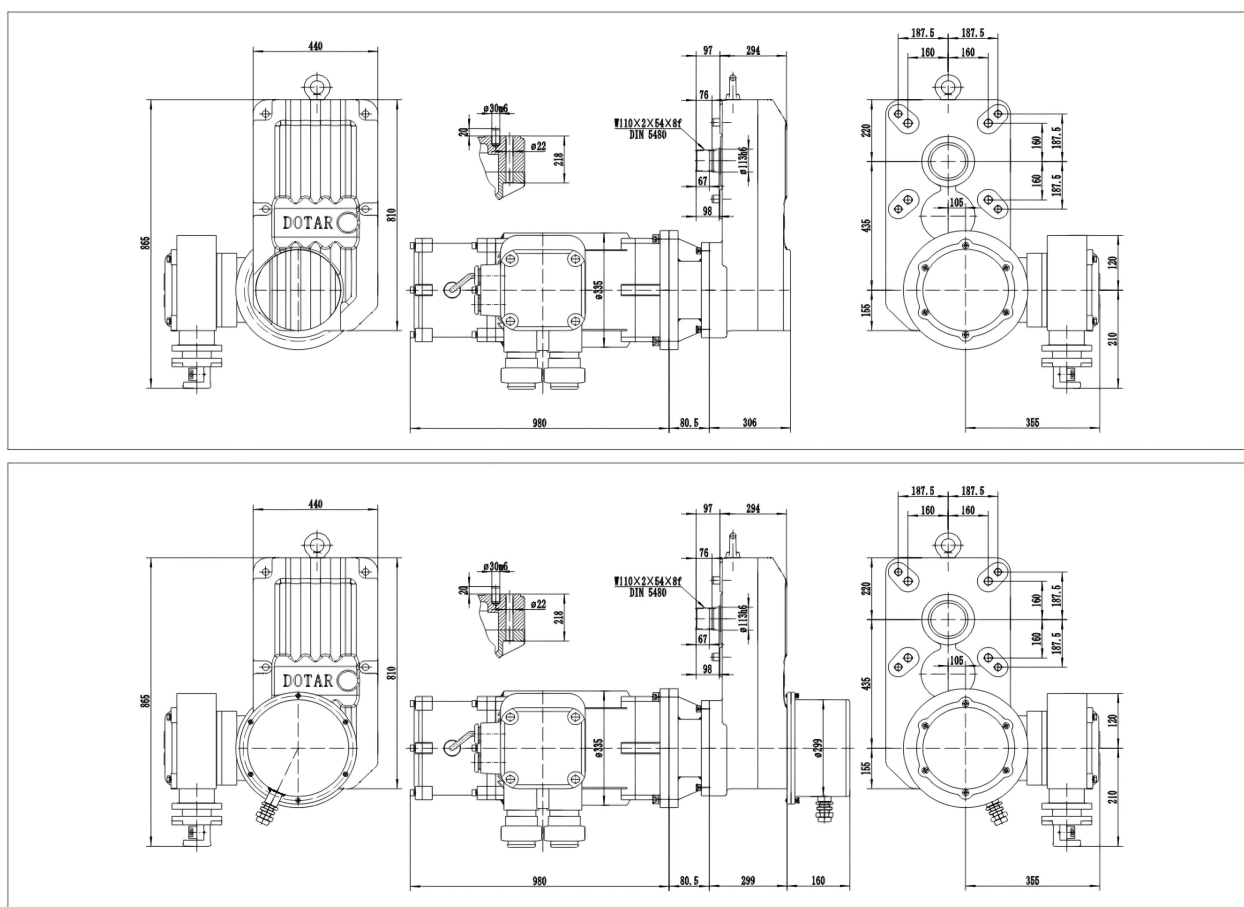

卷筒直径405mm 滑轮倍率4/1

带“S”的为双制动版本

| 序号 | 起重量t | 工作级别<br>ISO/FEM | 起升速度<br>m/min | 电机功率<br>kW | 频率Hz | 减速比   | 扭矩<br>N.m | 型号                                                |
|----|------|-----------------|---------------|------------|------|-------|-----------|---------------------------------------------------|
| 1  | 40   | M4/1Am          | 0.82-4.9      | 38         | 75   | 144   | 350       | DTQB(S)40000-144-YBZPE160L<br>-4-38kW-380V/75Hz   |
|    | 32   | M5/2m           |               |            |      |       |           |                                                   |
|    | 25   | M6/3m           |               |            |      |       |           |                                                   |
|    | 20   | M7/4m           |               |            |      |       |           |                                                   |
| 2  | 32   | M5/2m           | 1.03-6.2      | 38         | 75   | 113.3 | 350       | DTQB(S)40000-113.3-YBZPE160L<br>-4-38kW-380V/75Hz |
|    | 25   | M6/3m           |               |            |      |       |           |                                                   |
|    | 20   | M7/4m           |               |            |      |       |           |                                                   |
|    | 16   | M7/4m           |               |            |      |       |           |                                                   |
| 3  | 25   | M5/2m           | 1.26-7.6      | 38         | 75   | 92.2  | 350       | DTQB(S)40000-92.2-YBZPE160L<br>-4-38kW-380V/75Hz  |
|    | 20   | M6/3m           |               |            |      |       |           |                                                   |
|    | 16   | M7/4m           |               |            |      |       |           |                                                   |
|    | 12.5 | M7/4m           |               |            |      |       |           |                                                   |

卷筒直径405mm 滑轮倍率6/1

|   |    |        |          |    |    |       |     |                                                   |
|---|----|--------|----------|----|----|-------|-----|---------------------------------------------------|
| 4 | 63 | M4/1Am | 0.53-3.2 | 38 | 75 | 144   | 350 | DTQB(S)40000-144-YBZPE160L<br>-4-38kW-380V/75Hz   |
|   | 50 | M5/2m  |          |    |    |       |     |                                                   |
|   | 40 | M6/3m  |          |    |    |       |     |                                                   |
|   | 32 | M7/4m  |          |    |    |       |     |                                                   |
| 5 | 50 | M4/1Am | 0.68-4.1 | 38 | 75 | 113.3 | 350 | DTQB(S)40000-113.3-YBZPE160L<br>-4-38kW-380V/75Hz |
|   | 40 | M5/2m  |          |    |    |       |     |                                                   |
|   | 32 | M6/3m  |          |    |    |       |     |                                                   |
|   | 25 | M7/4m  |          |    |    |       |     |                                                   |

卷筒直径405mm 滑轮倍率8/1

|   |    |        |         |    |    |     |     |                                                 |
|---|----|--------|---------|----|----|-----|-----|-------------------------------------------------|
| 6 | 80 | M4/1Am | 0.4-2.4 | 38 | 75 | 144 | 350 | DTQB(S)40000-144-YBZPE160L<br>-4-38kW-380V/75Hz |
|   | 63 | M5/2m  |         |    |    |     |     |                                                 |
|   | 50 | M6/3m  |         |    |    |     |     |                                                 |
|   | 40 | M7/4m  |         |    |    |     |     |                                                 |



## Hangzhou GT Rail Traffic Equipment Co., Ltd

Address: No.21 Jinfeng 3rd Road, Yipeng Street, Qiantang District, Hangzhou City, Zhejiang Province, China.

Web: [www.ivhdrive.com](http://www.ivhdrive.com) <http://ivhdrive.en.alibaba.com>

Email: [info@ivhdrive.com](mailto:info@ivhdrive.com) [william@ivhdrive.com](mailto:william@ivhdrive.com)

Mob: +86 187 5820 4915

**Professional Industry-Trade Integration.**

**Equipment And Integrated Solution Provider.**

**Integrity, Focus, Innovation.**

